

ASSEMBLY INSTRUCTIONS



Important Notice:

Pls check all parts are included before assembly.

Be Sure to Follow the Steps in Order:

① Start with the base and wheels.

② Connect the backrest and seat.

★③★ Only insert the gas lift when you confirm of satisfaction with the base and seat section and decide to keep the chair!!! ☆











Note that once the gas lift is inserted, it is difficult to disassemble, which may prevent the item from fitting its original box and restrict the possibility of returns. ☆

Questions and After-Sales Service:

For any queries, or if something's damaged, please feel free to contact our official support via purchase platform for prompt and warm assistance.


Thanks for your cooperation. Take care and stay safe~

Parts List

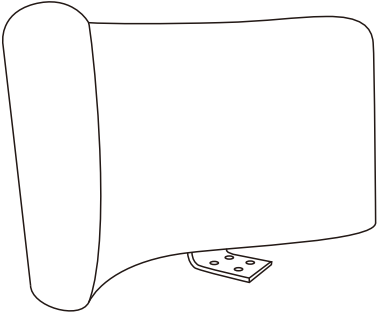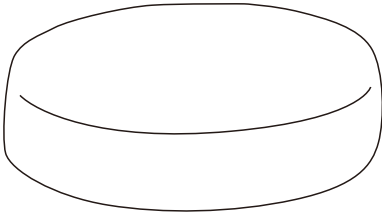Ax1 	Bx1 	Cx1 
Dx1 ⚠⚠⚠ Final assembly! 	Ex5 	Fx1 
Gx1 	Hx5 	Ix10+1  M6x16mm
Jx4+1  M6x20mm	Kx4+1  M6x30mm	Lx1 


Installation Steps

1

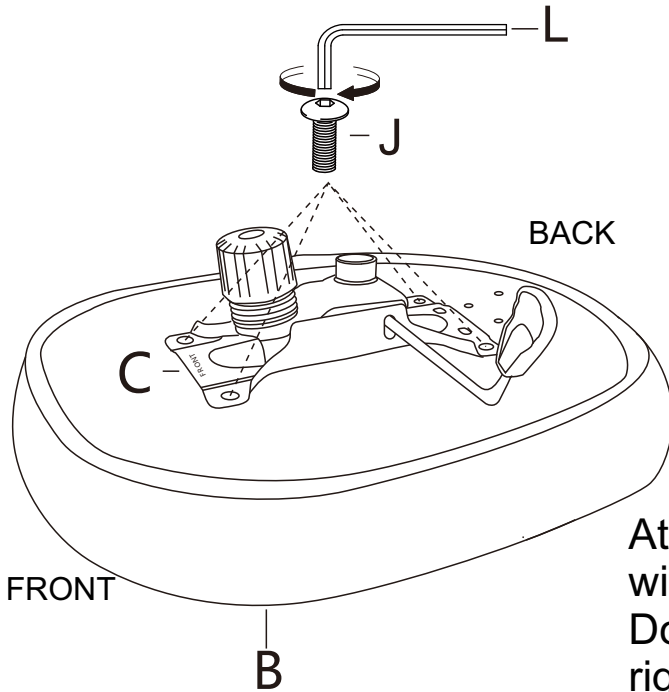


Attach mechanism (C) to the seat (B) with screws (J) .
Don't screw 100% until all of them are right in the holes so that you can adjust slightly during the process of assembly.

2

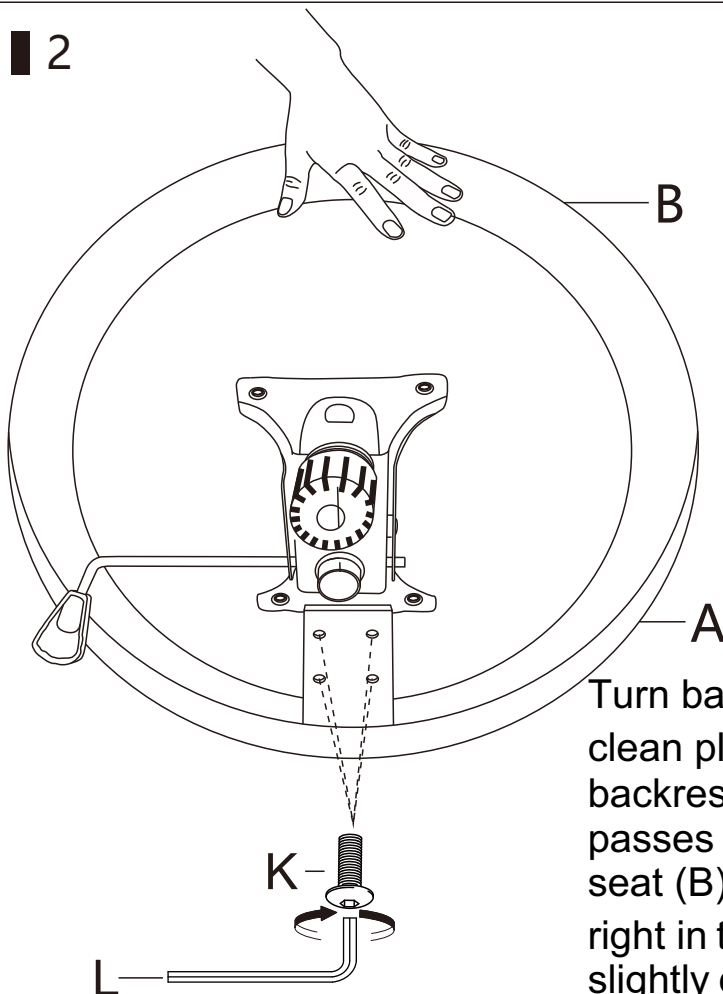


Turn backrest (A) on its side and put it in a clean place. Press the seat (B) toward the backrest (A) to align the holes. Screw (K) passes through the holes in backrest (A) and seat (B). Don't screw 100% until all of them are right in the holes so that you can adjust slightly during the process of assembly.


■ 3

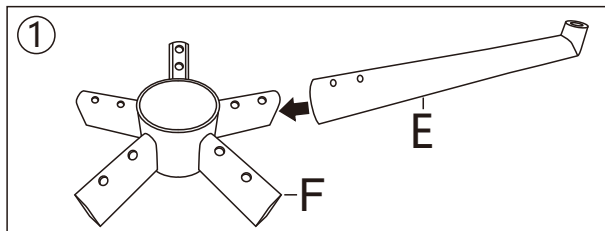


Sleeve each of the parts (E) into part (F).

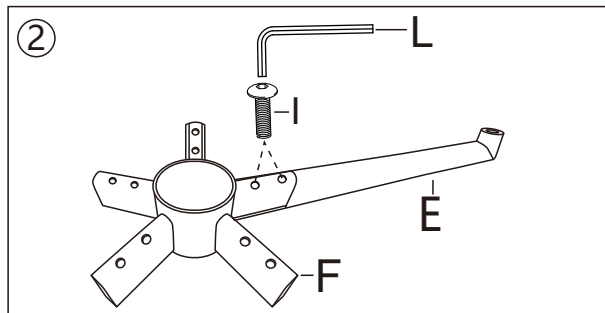


Pass the screws (I) one by one through the holes in (E) and (F) and tighten them with allen key (L).

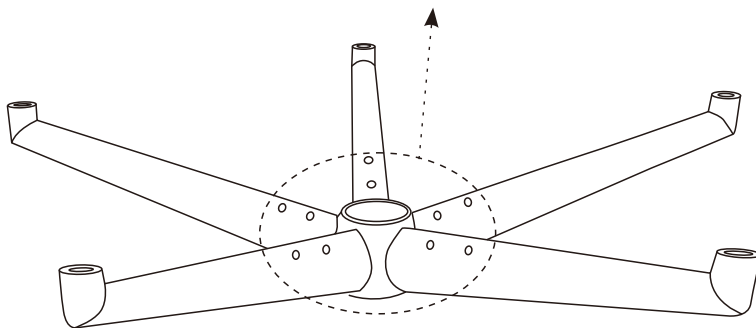

■ 4

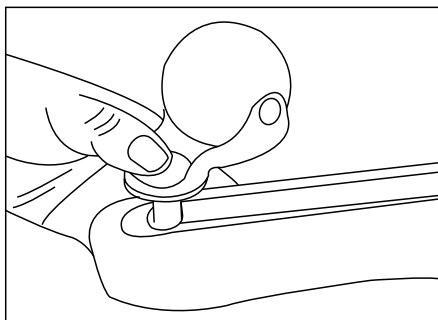


Press the casters (H) into the holes at the end of each leg of the base.

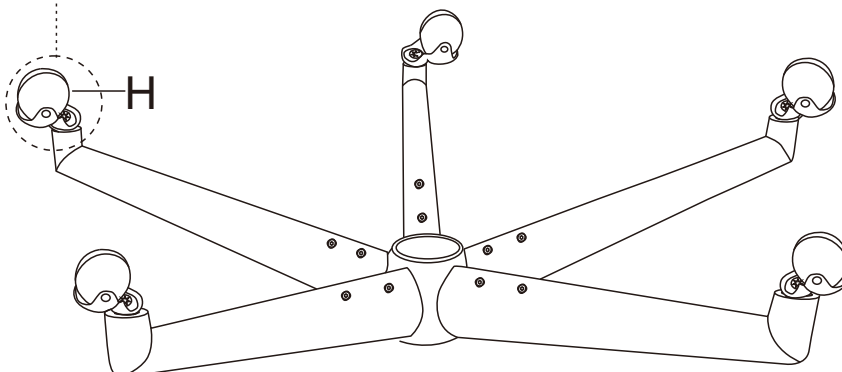

- 5 ⚠⚠⚠ Confirmation of satisfaction with the base, seat section, materials, color and appearance, etc. and confirm that you wish to keep it for use, then you insert the gas lift.


Note that returns will not be easy after this step.

(as the gas lift is hard to remove and stops fitting into its original box, which means it will not be eligible for shipment.) !!!

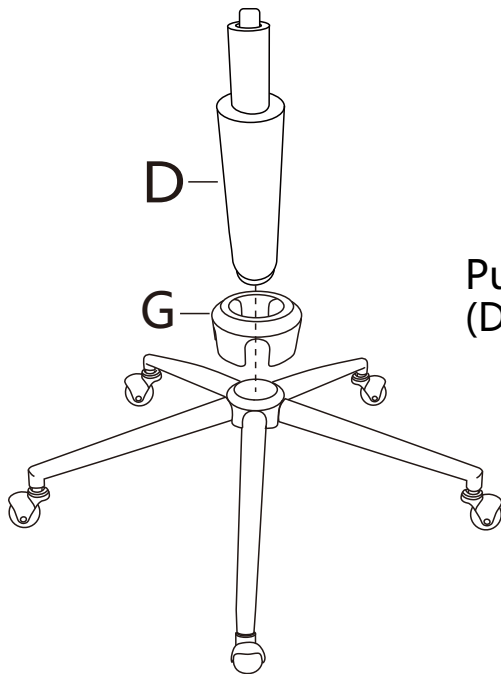

Put in the decorative cover (G), insert the gas lift (D) into the center hole of the Star Base.


■ 6

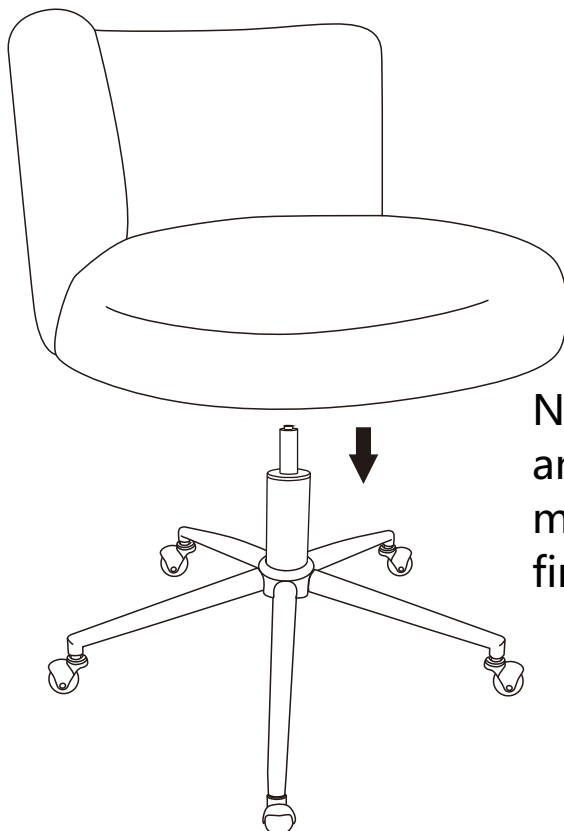

Now turn the assembled seat upright and locate the center hole of the mechanism over the gas lift. Push down firmly until the connection is secure.

7

Seat Height: Paddle-shaped lever on the right side.

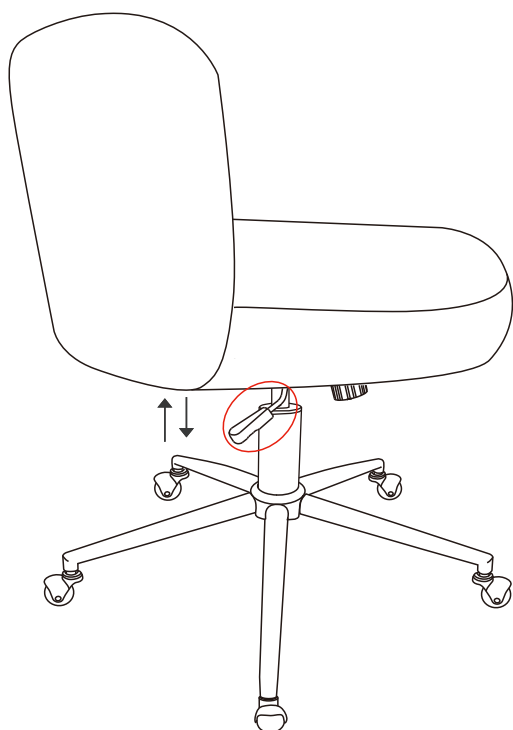


↑ To raise
while taking your weight off chair,
lift lever up.

↓ To lower
while seated, lift the handle upwards without
releasing, and your weight will lower the chair.

8

Tilt Tension: Long stem under the seat cushion with knob.

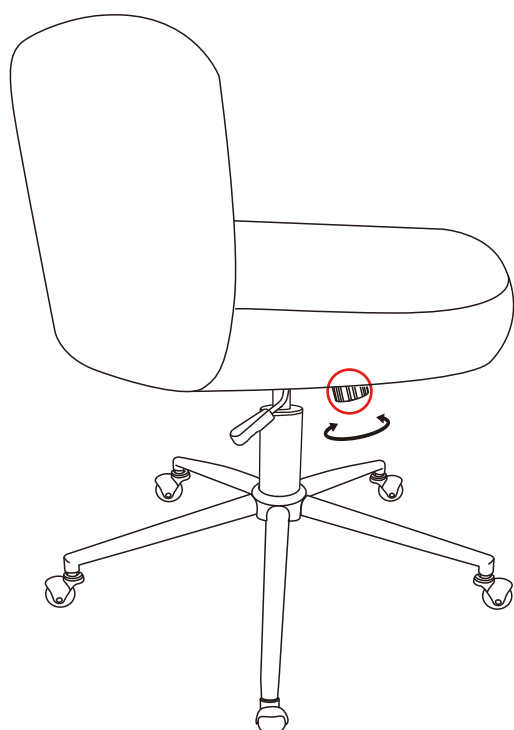


⤴ To increase tension:
while seated, turn knob forward
(toward + sign).

⤵ To decrease tension:
while seated, turn knob
backward (toward - sign).

9

Operating the tilt lock out.

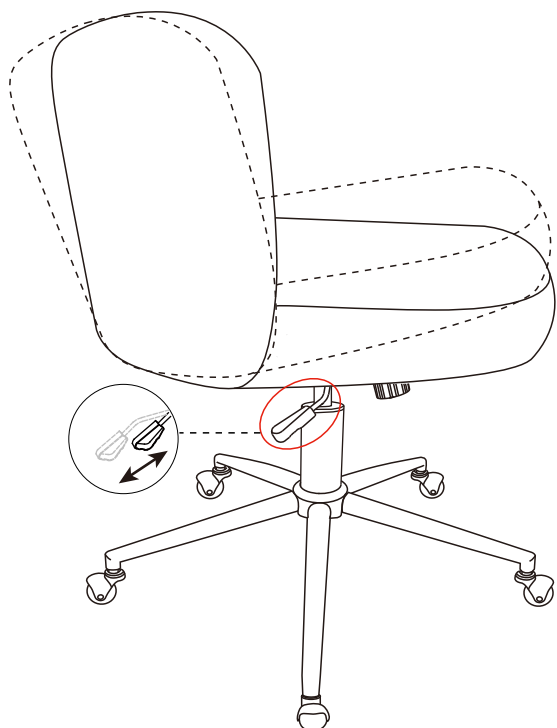


To let your chair tilt back, pull the control handle out.



To stop your chair from tilting, sit forward, then push the control handle in.

10

Assembly completed.

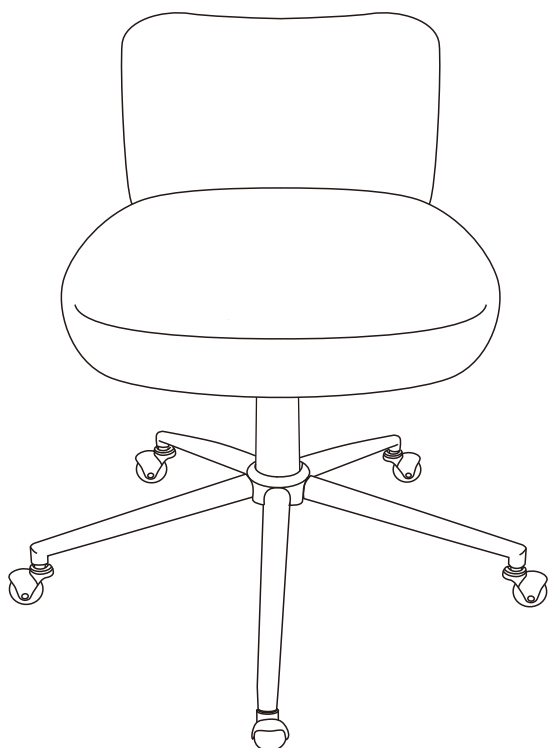

A warm reminder to our honored client:

If there is any part arrived damaged or defective, or any queries during the assembly, please feel free to contact the seller.

We are happy to work out the satisfied solution for you. Pictures if you could provide to us would be highly appreciated.

Hope this lovely home office desk chair could be a durable addition and convenience to your warm space!

