

INSTALLATION INSTRUCTION

Please watch the installation video on the details page



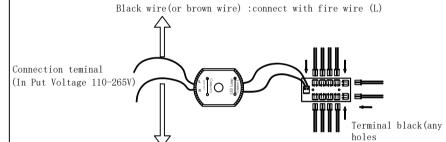

can be plugged)

White wire (or blue wire) : connect with neutral wire (N)

Installation Steps:

- 1. Install the "+"metal mount.
- 2. Remove the protective film wrapped on the lamp body, do not use knives or sharp instrument,
- so as not to scratch the light body or wire insulation layer.
- 3. Install ten pepals lamp head to the light fixture plate
- 4.Test circuit: Connect the power wires with a temporary wire for testing if the light is working properly before install it to the ceiling.
- 5. Installation: Fix the lamp body to the cross hardware hanger, connect the power wires with the connecting terminals.
- 6. Turn on the power and double check again, the installation is complete.



Warning!

- 1) Please install by professional.
- 2) The voltage available for 110-260V only.
- B) Don't install the lighting fixture under moist condition.
- 4) Please switch off the power when you cleanning the lighting fixture.
- 5) Keep away fram acidic & corrosive material.

Installation instructions for Metal mount


This job will go easier with two people, because the light needs support during assembly, and it helps having somebody to read the directions. I am referring to the acrylic pieces "the petals" and the round metal thing as "the light fixture metal plate."




Threading the wire through to the double ended metal tube and Install two tubes to the the petal.



20pcs lock washers




Install 20 double ended metal tubes to the petals



Fasten the first pepal (use 5CM tubes) to the light fixture metal plate with a lock washer and a nut.The position show on the picture.It will look very flat, not 3D.

Notice:Place the tubes of one petal into corresponding holes on the edge of the round metal fixture




Fasten the second pepal (use 5CM tubes) to the light fixture metal plate with a lock washer and a nut. The position show on the picture. It will look very flat, not 3D.
Notice:Place the tubes of one petal into corresponding holes


on the edge of the round metal fixture



Fasten the third to the seventh pepals (use 5CM tubes) to the light fixture metal plate with a lock washer and a nut. The position show on the picture. It will look very flat, not 3D. Notice:Place the tubes of one petal into corresponding holes on the edge of the round metal fixture



Fasten the eighth to tenth pepals (use 7CM tubes) to the light fixture metal plate with a lock washer and a nut. The position show on the picture. It will look very flat, not 3D. Notice:Place the tubes of one petal into corresponding holes on the middle of the round metal fixture



5:First:Very carefully plug the 10 tiny little plugs to the control block, any hole can be pluged.

Second:after finishing install the light fixture you can install it to your celing.

Notice:

The black wire (or brown wire) is connect to fire wire (L):
The white wire (or blue wire) is connect to neutral wire (N)



Fix the light fixture to the metal mount on the ceiling.