


INSTALLATION INSTRUCTIONS

DeerValley®

Bathroom Shower Enclosure

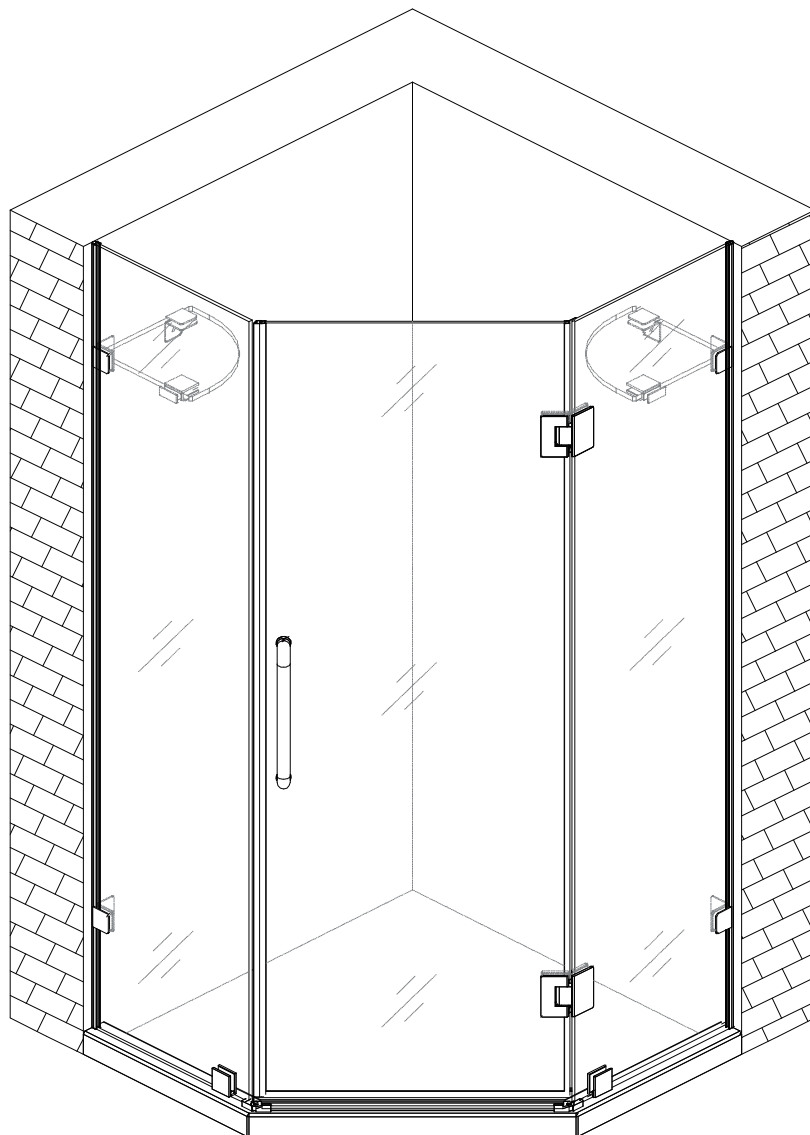

Safety — Read Before Unpacking



A minimum of two people are required to lift and install this product. Professional installation is recommended.



Read all instructions carefully before unpacking and installing the product.

- We reserve the right to change, update, modify, or redesign this manual, product, or related specifications without prior notice.
- It is your responsibility to visit our website or contact customer service to obtain the latest version of the installation instructions.



Never lift or carry the glass panels by the handle or towel bar. Always hold the glass by the edges. The handle is not designed as a lifting point and may cause the glass to break.



Never place glass panels directly on tile, concrete, or any hard surface. Always lay glass flat on a soft protective blanket at least 1/4" thick. Never place glass panels upright on their corners or edges.



Inspect all glass panels and components before installation. Do not install any glass with chips, cracks, or scratches. Stop installation and contact customer service if any damage is found.



The wall and supporting structure must be capable of supporting the full weight of the shower door assembly.



Use professional-grade glass suction cups when handling glass panels. Do not modify the product in any way. For residential use only.

Tempered Glass Spontaneous Breakage Safety Notice



Risk of Tempered Glass Spontaneous Breakage

Tempered glass may rarely experience spontaneous breakage due to factors such as internal stress, sudden temperature changes, edge damage, or uneven installation stress. This is an inherent characteristic of tempered glass and does not necessarily indicate a product defect.

Installation Safety

To reduce the risk of glass breakage during installation:

- Carefully inspect the glass panels before installation. Do not install any glass panel with visible cracks, chips, or edge damage.
- Do not force the glass panel into position during installation. Do not apply excessive pressure from the wall brackets, fixed glass clips, glass connectors, center guide, or other hardware. Maintain proper clearance between the glass and hardware components to prevent stress concentration that may cause glass breakage.
- Tighten screws, clips, and fasteners with moderate force. Do not overtighten or apply excessive pressure to the glass edges.
- Avoid direct rigid contact between the glass and hard materials such as metal, tile, or stone. Ensure protective pads, seals, or gaskets are properly installed where required.

Use and Maintenance Safety

To reduce the risk of glass damage during use:










- Avoid exposing the glass to extreme temperature changes, such as spraying cold water directly onto glass that has been heated by prolonged sunlight.
- Do not hit, strike, or lean heavily against the glass door or panels.
- Regularly inspect seals, protective pads, or buffers, if applicable. Replace any damaged or worn components to prevent direct contact between the glass and metal parts.
- Stop using the shower door immediately if you notice cracks, unusual sounds, or visible fracture patterns on the glass. Do not attempt to repair or handle damaged glass yourself. Contact a qualified professional for inspection or replacement.

If Glass Breakage Occurs

- Stay calm and keep away from the broken glass area.
- Do not walk on broken glass or pick up glass fragments with bare hands. Although tempered glass breaks into small pieces, the fragments may still cause injury.
- Wear protective gloves and use appropriate tools when cleaning up broken glass, or contact a professional for assistance.
- Take photos of the affected area and contact DeerValley Customer Service for assistance. Please provide details of the situation and retain your original proof of purchase for warranty evaluation.

Customer Service: (312) 626-9466 service@deervalleybath.com


Recommended Tools (Not Included)

Material Name	Illustration	Material Name	Illustration
Power Drill		Glass Suction Cups	
1/4" Drill Bit		Silicone Sealant	
Utility Knife		Tape Measure	
Pencil		Screwdriver	
Hammer		Painter's Tape	
Allen Wrench		Safety Glasses	
Level		Work Gloves	
Plumb Bob		Soft Protective Cloth or Blanket	

Note:


The tools listed above are not included. Additional tools may be required depending on the installation conditions.

Exploded View

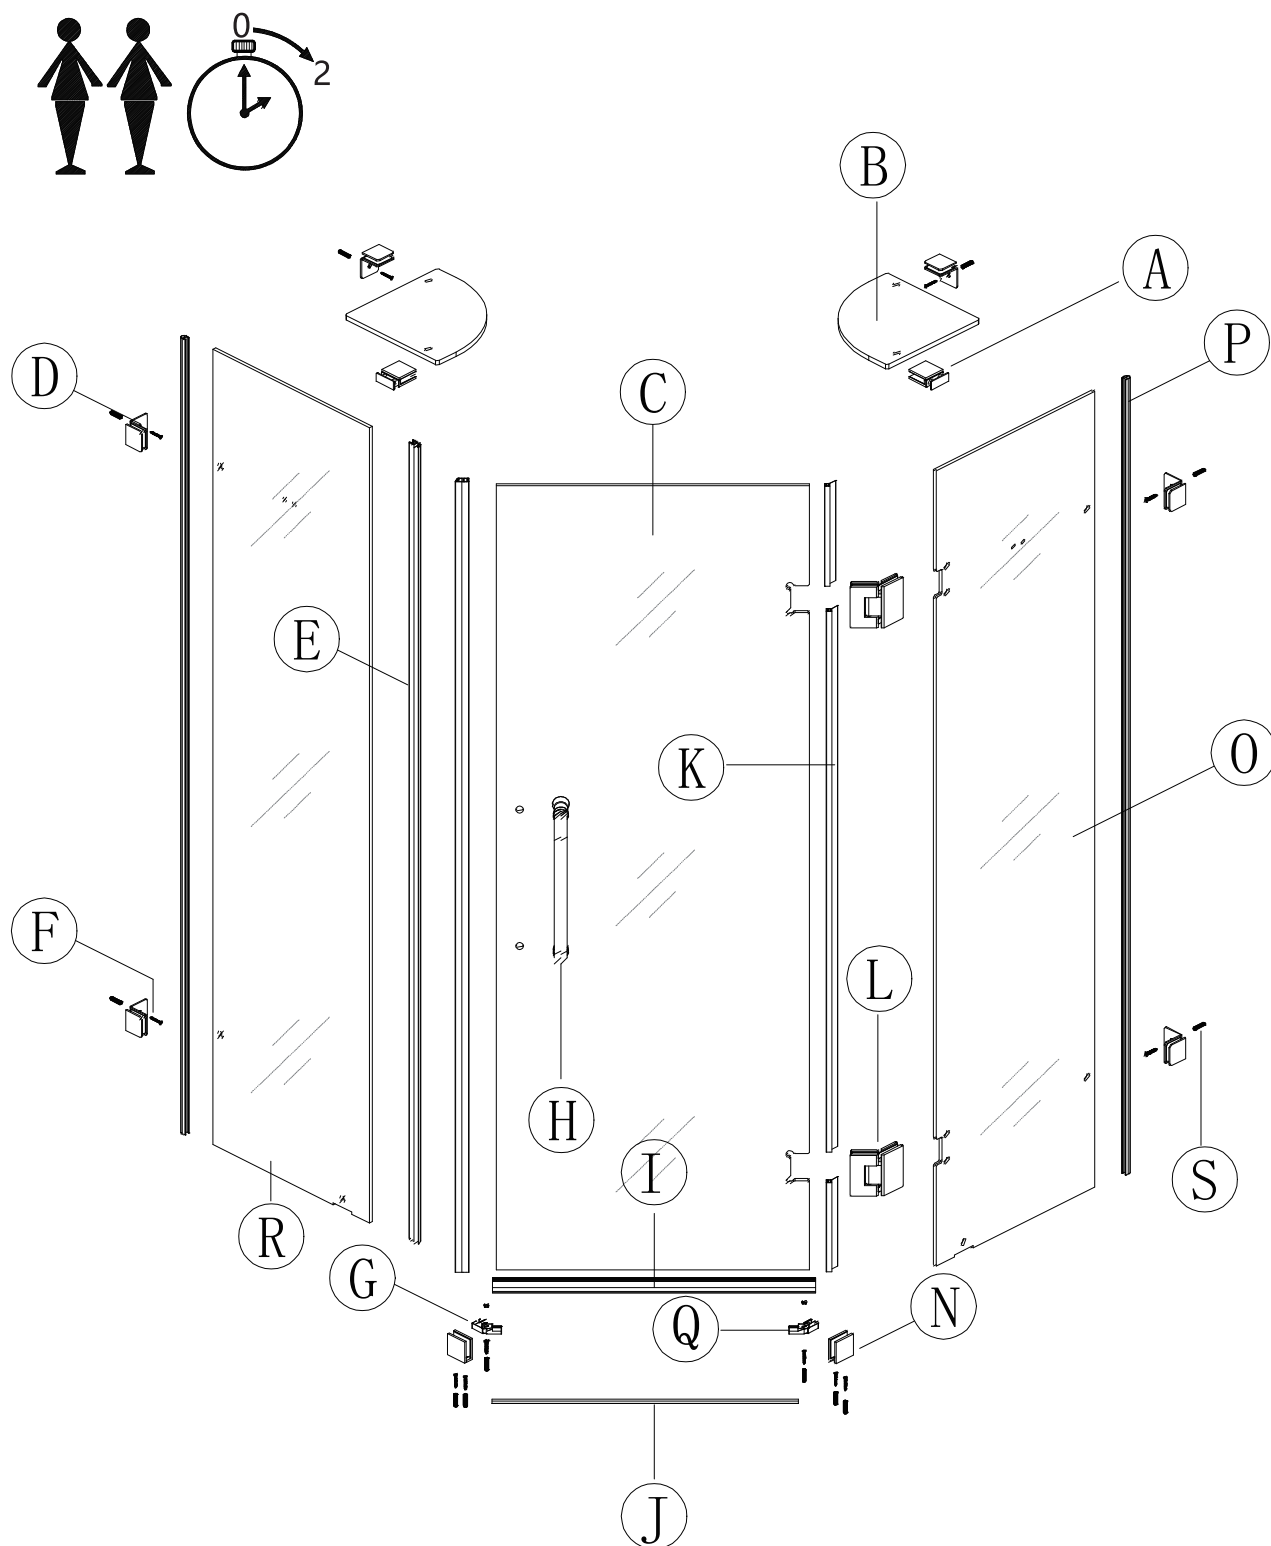


Parts List

NO:A 2PCS




Glass Shelf
Mounting Clip

NO:B 2PCS




Glass Shelf

NO:C 1PC




Door Glass Panel

NO:D 6PCS




Corner Bracket

NO:E 2PCS




Magnetic Door Seal Strip

NO:F 12PCS



Screw

NO:G 1PC




Left Connector

NO:H 1PC




Door Handle

NO:I 1PC




Door Bottom Sweep

NO:J 1PC




Aluminum Threshold

NO:K 1PC




Waterproof Seal Strip

NO:L 2PCS



Door Hinge

NO:N 2PCS



Glass Floor Clip

NO:O 1PC




Fixed Glass Panel

NO:P 2PCS




Wall Bulb Seal

NO:Q 1PC




Right Connector

NO:R 1PC



Fixed Glass Panel

NO:S 12PCS



Wall Anchor

Drawings may not exactly define contour of the product.

Pre-Installation Dimensions & Checklist

Product Dimensions


Side Wall Width A: 34 in.

Overall Height B: 73 in.

Door Width C: 23 7/16 in.

Installation Width D: 25 1/16 in.


Side Panel Width G: 15 5/16 in.

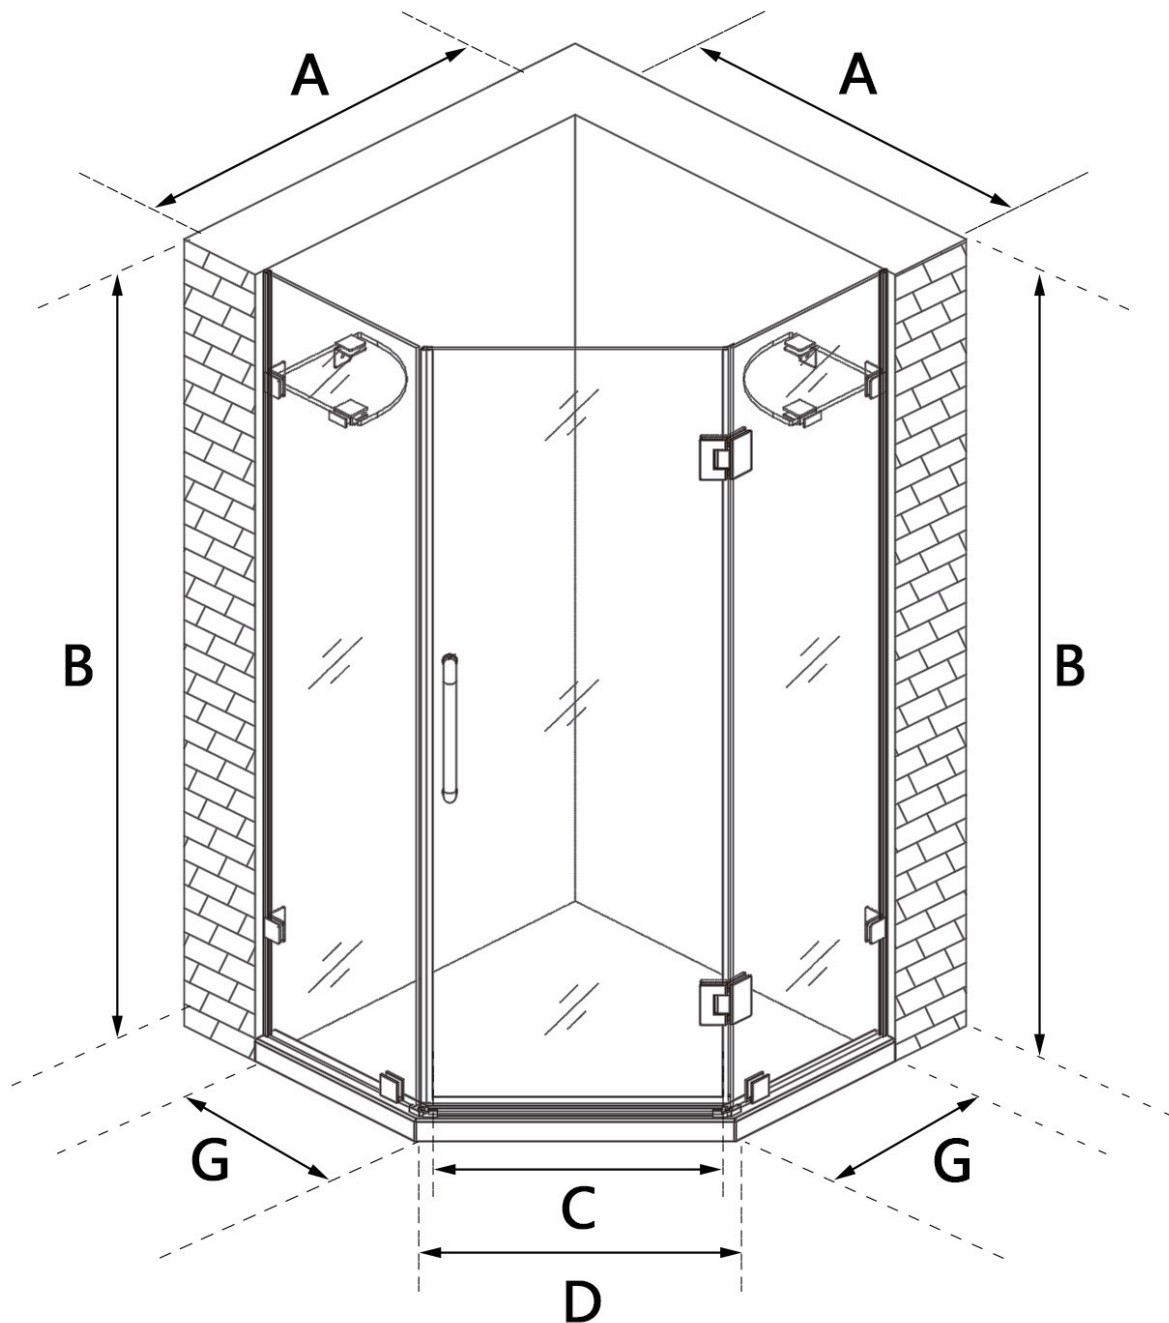

Drawings may not exactly define contour of the product.



Before You Drill — Verify Your Opening

Use a 20"–40" (500–1000 mm) level to check that both walls are plumb and the shower base/curb is level. Correct any excessive deviation before installation.

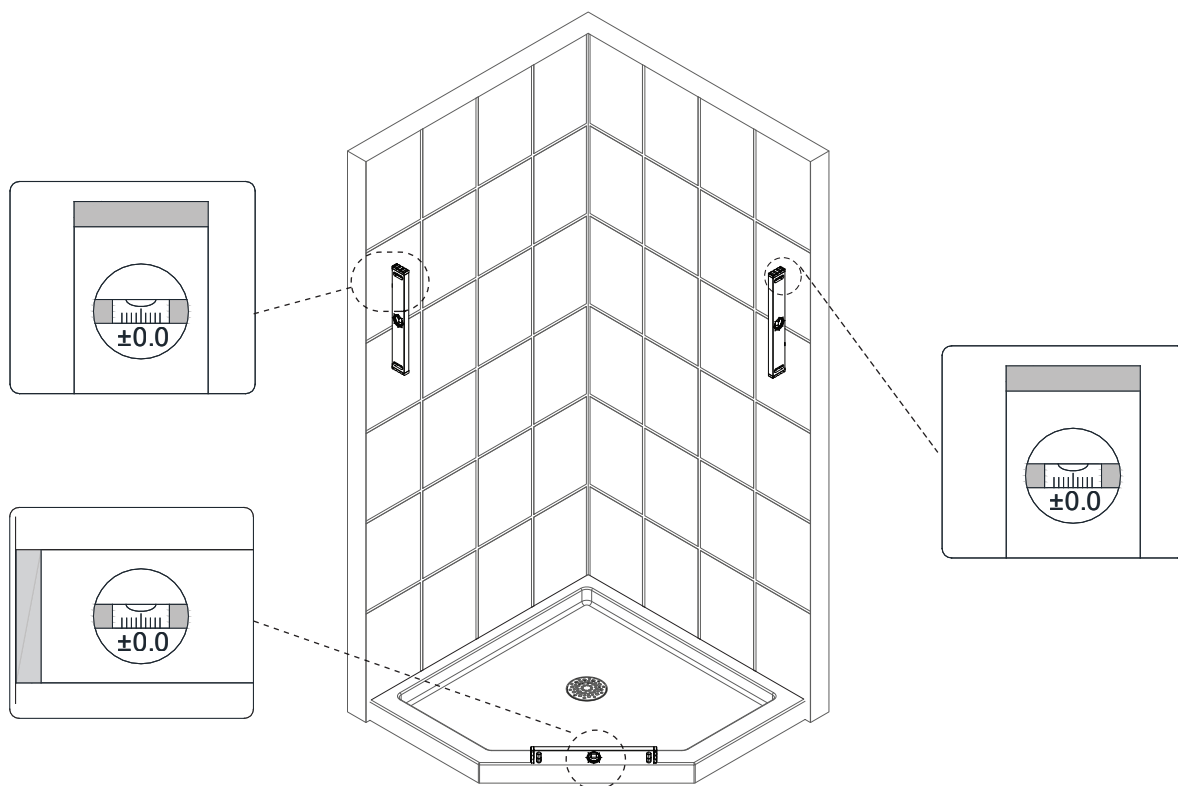

Drilling Precautions


Contact the manufacturer of the shower base or other threshold material before drilling any holes into the product if you have questions about the drilling requirements.

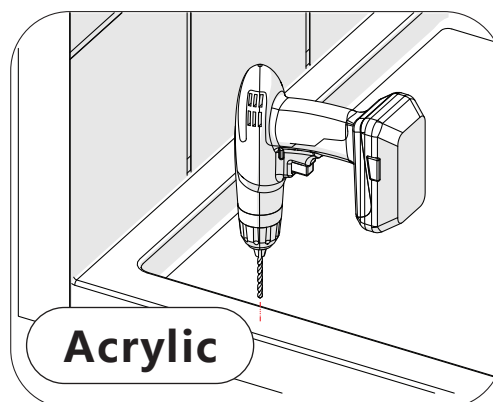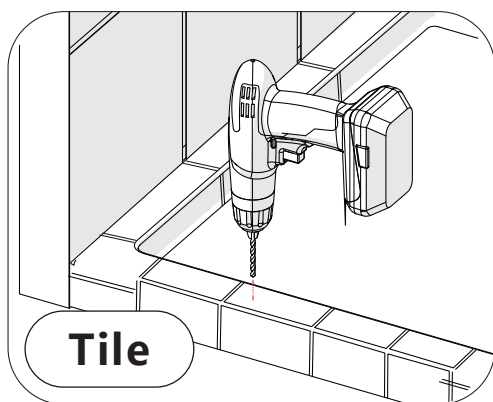

Drawings may not exactly define contour of the product.

Confirm Required Installation Space


Before installation, confirm that the installation surface provides sufficient flat and level space for the aluminum threshold.

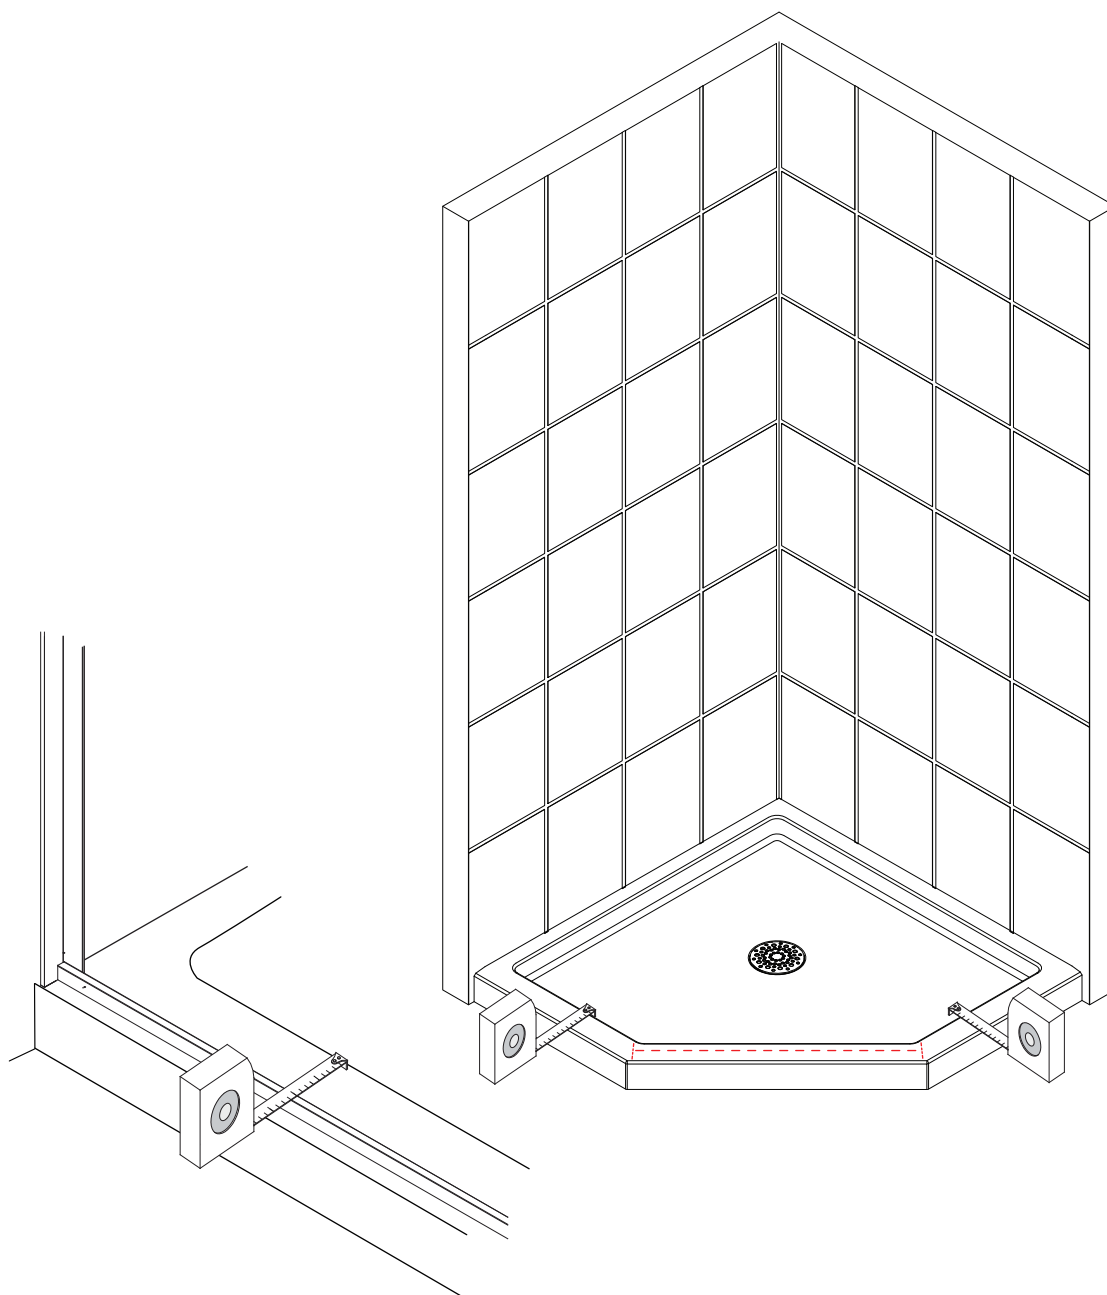

Note: The width of the aluminum threshold is 2 15/16" (75 mm). For installation on a shower curb, a minimum flat installation width of 2 15/16" (75 mm) is recommended to allow space for sealant and adjustment. The installation surface must be flat and level. Installation is not recommended if the available width is less than 2 15/16" (75 mm).

Drawings may not exactly define contour of the product.

Reversible Installation

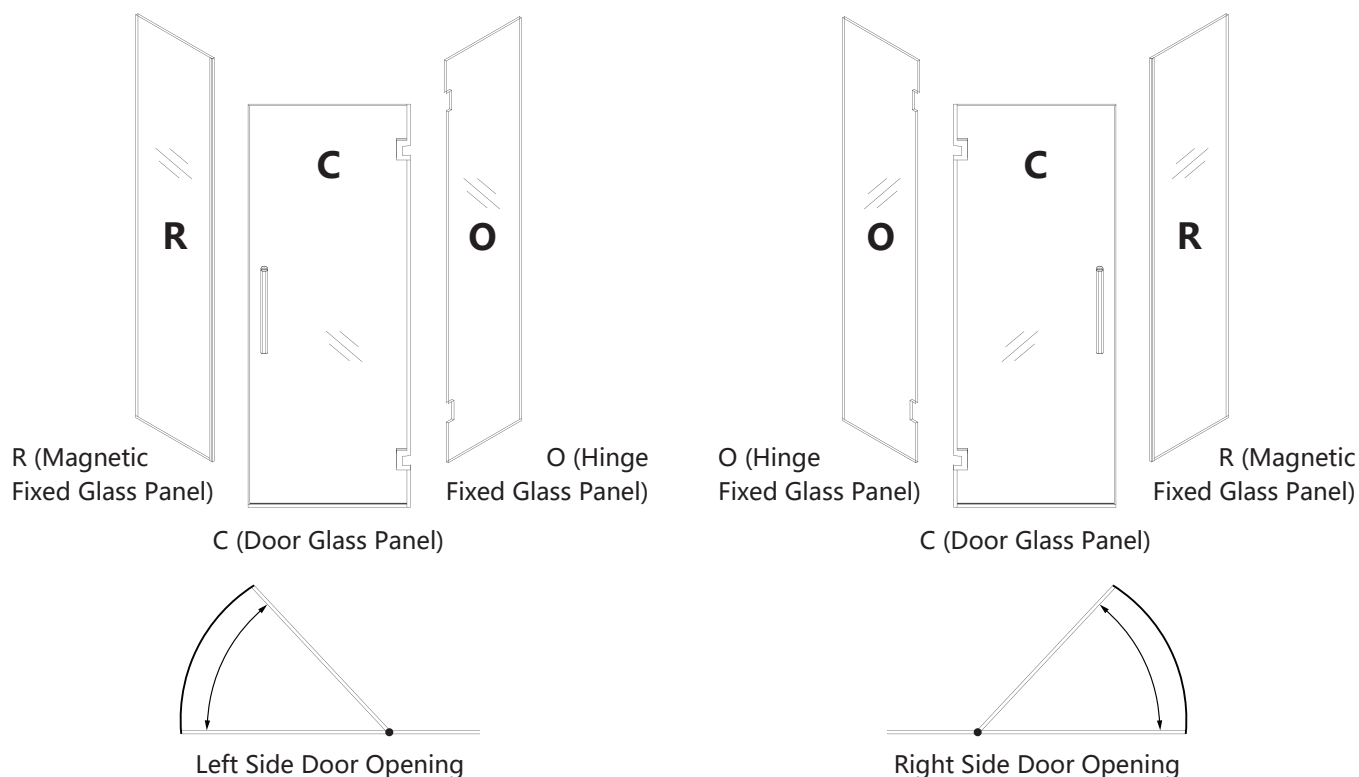

Note: This shower enclosure is reversible and can be installed with the door opening to either the left or right. Determine the desired door orientation before installation and follow the corresponding installation steps.

Checklist —

Do Not Proceed Until All Items Are Confirmed

- ☐ Opening width W is within the specified installation range for your model.
- ☐ Both anchor locations have solid masonry support behind the wall.
- ☐ The installation surface provides at least 2 15/16" (75 mm) of flat, level space for the threshold.
- ☐ All anchor locations have adequate wall support behind the wall surface.
- ☐ The desired door opening direction (left or right) has been confirmed.
- ☐ All glass panels have been inspected and are free of chips, cracks, or scratches.


If any item fails, stop installation and contact us before drilling holes:

(312) 626-9466


service@deervalleybath.com

Drawings may not exactly define contour of the product.


Installation Steps

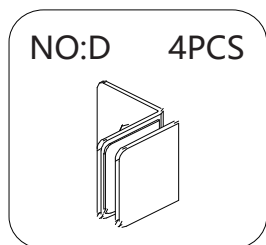


Corner Bracket

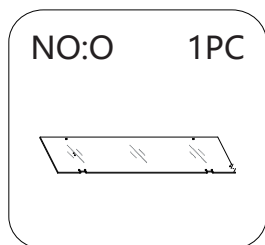


Fixed Glass Panel

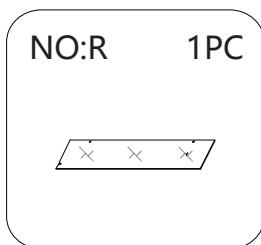

Fixed Glass Panel

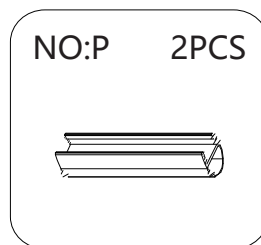






Wall Bulb Seal

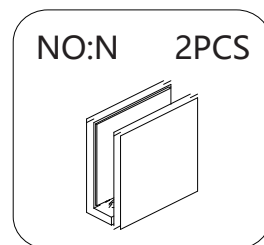

Glass Floor Clip

Step 1: Prepare the Fixed Glass Panels

- 1-1. Place the hinge fixed glass panel and magnetic fixed glass panel on a soft protective cloth or blanket to protect the glass from damage.
- 1-2. Install the wall bulb seal onto the wall-facing edge of each fixed glass panel.
- 1-3. Pre-install the corner brackets onto the hinge fixed glass panel and magnetic fixed glass panel. Do not fully tighten the fasteners at this time.
- 1-4. Pre-install the glass floor clips onto the bottom edge of each fixed glass panel.

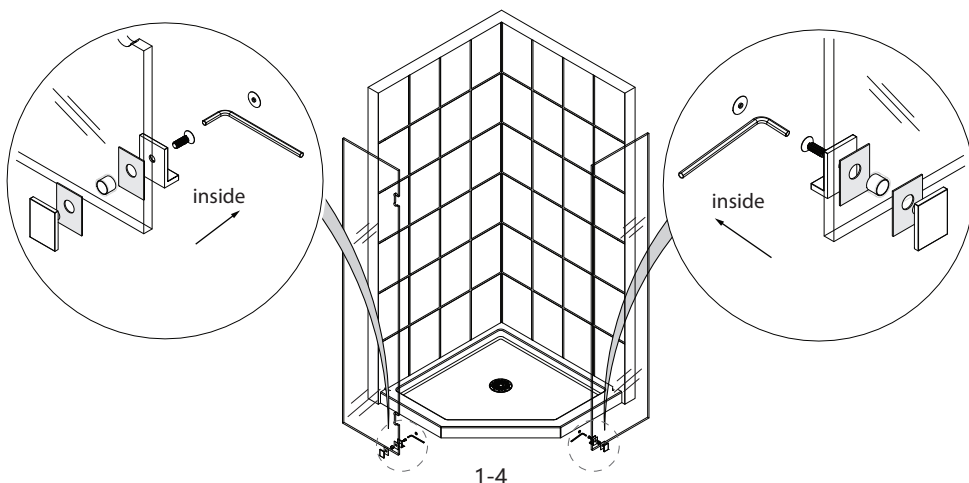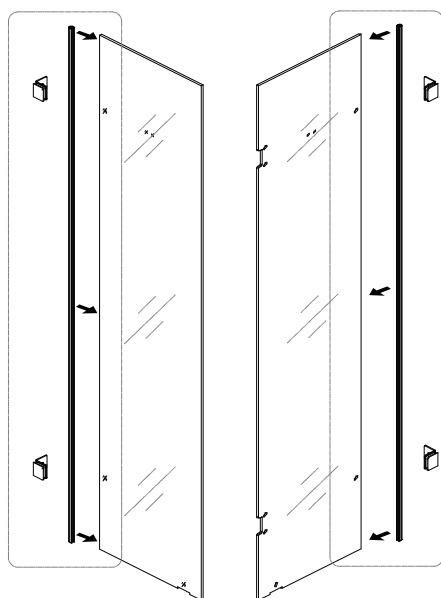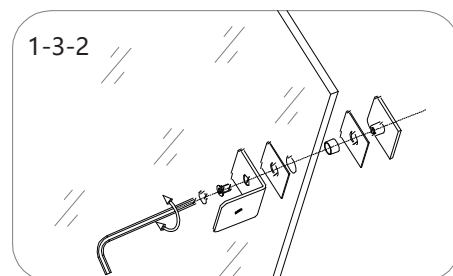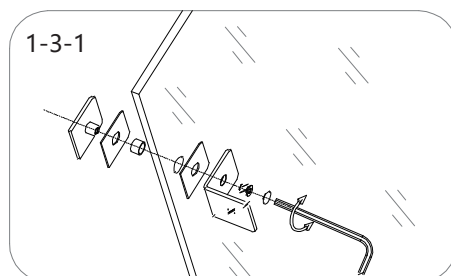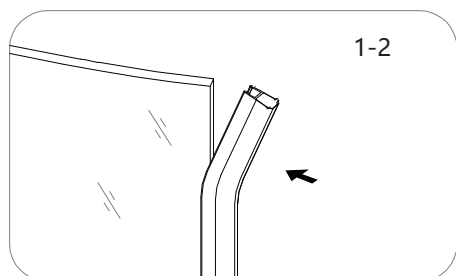


Note: Do not overtighten the fasteners during pre-installation. Final adjustments will be made after the glass panels are positioned.


Drawings may not exactly define contour of the product.

Step 2: Position and Mark the Fixed Glass Panels


- 2-1. Position the hinge fixed glass panel and magnetic fixed glass panel in their intended installation locations.
- 2-2. Use a level to ensure that both fixed glass panels are plumb and properly aligned.
- 2-3. Adjust the position of the panels as needed and confirm that the spacing and door opening are correct.
- 2-4. Once the panels are properly positioned, use a pencil to mark the mounting hole locations for the corner brackets and glass floor clips.
- 2-5. Carefully move the fixed glass panels away from the installation area before drilling.

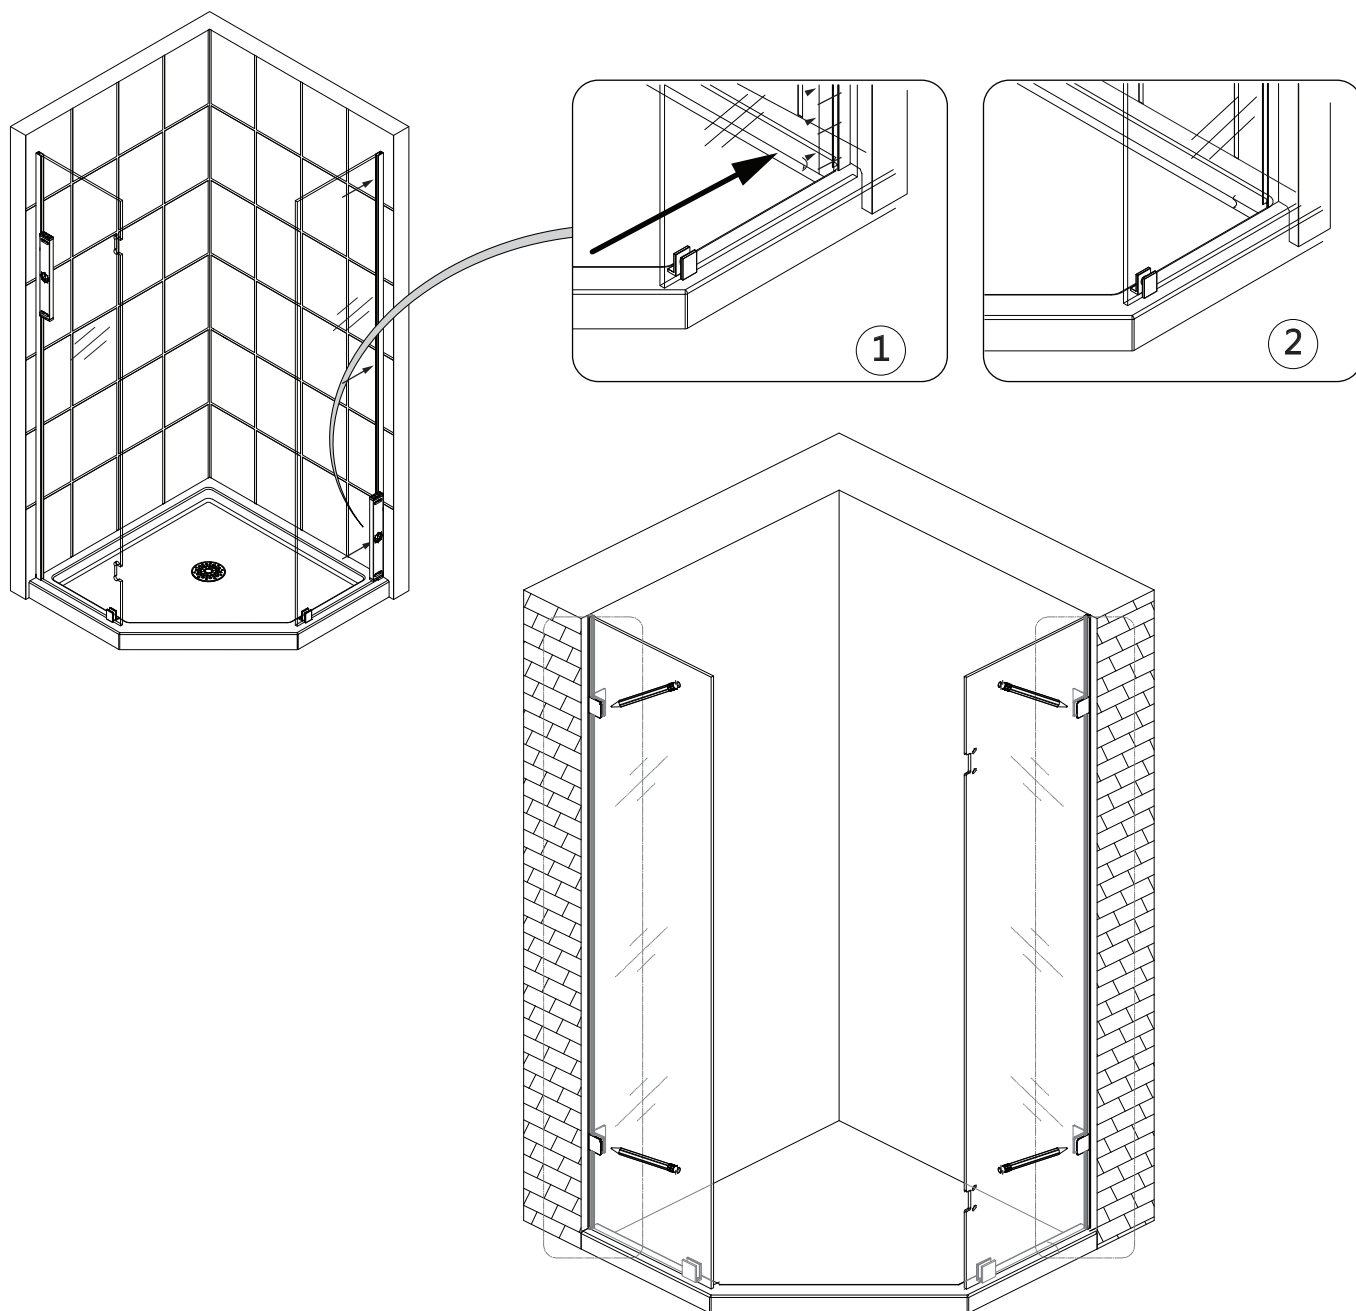

Drawings may not exactly define contour of the product.

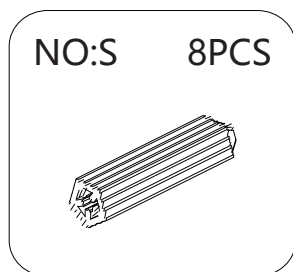






Wall Anchor

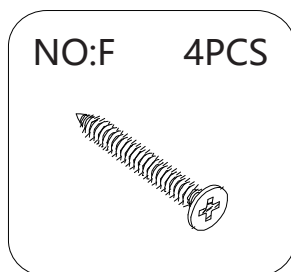

Screw


Step 3: Drill and Install the Wall Anchors and Glass Floor Clips

- 3-1. Use a power drill with a 1/4" drill bit to drill holes at the marked mounting locations.
- 3-2. Insert a wall anchor into each drilled hole.
- 3-3. Use a hammer to gently tap each wall anchor into place until it is flush with the installation surface.
- 3-4. Reposition the glass floor clips at the marked locations and align the mounting holes with the wall anchors.
- 3-5. Secure the glass floor clips with the screws.

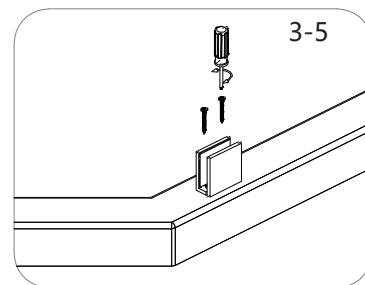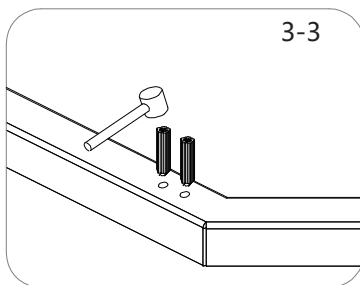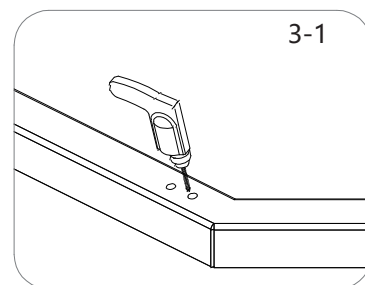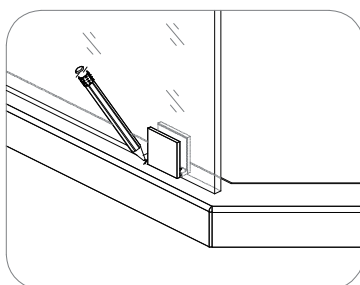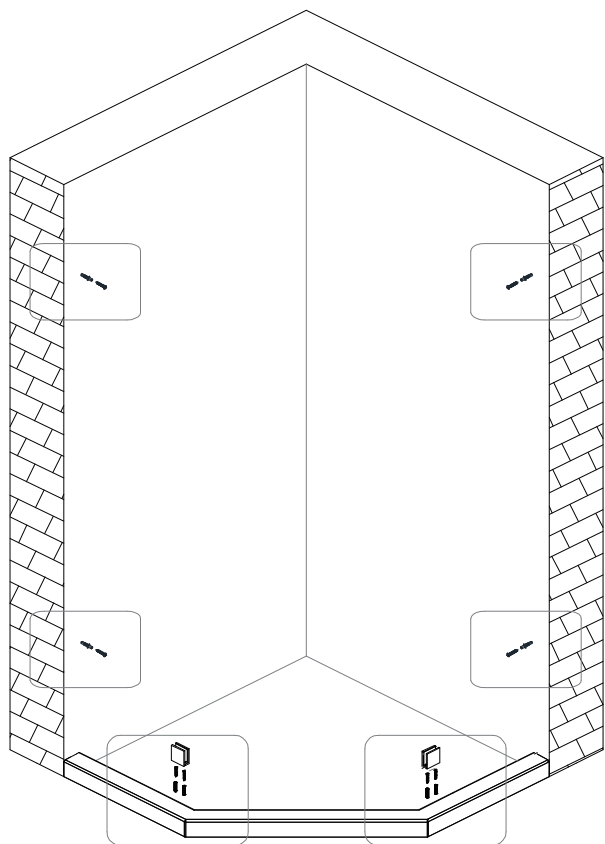

IMPORTANT : Contact the manufacturer of the shower base or other threshold material if you have any questions about drilling holes into the product.





Drawings may not exactly define contour of the product.

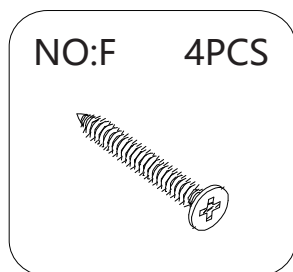


Screw

Step 4: Install the Fixed Glass Panels

- 4-1. Carefully position the hinge fixed glass panel and magnetic fixed glass panel into the installed glass floor clips.
- 4-2. Align the fixed glass panels with the marked positions on the wall and make sure they are properly seated in the glass floor clips.
- 4-3. Use a level to check that both fixed glass panels are plumb. Adjust their positions as needed.
- 4-4. Align the corner brackets with the corresponding wall anchors and secure them to the wall with screws.
- 4-5. Recheck the vertical alignment of both fixed glass panels and make any necessary adjustments.
- 4-6. Once the fixed glass panels are properly aligned and plumb, use the allen wrench to fully tighten the glass floor clips.

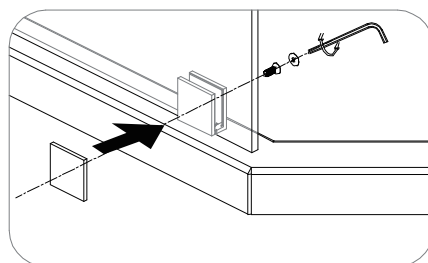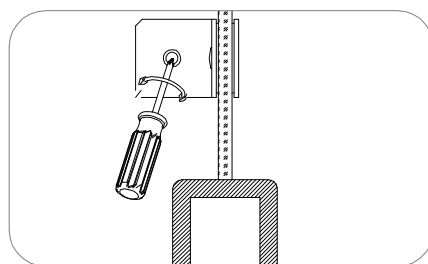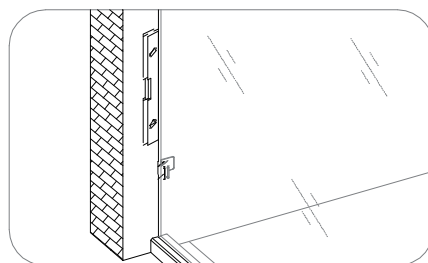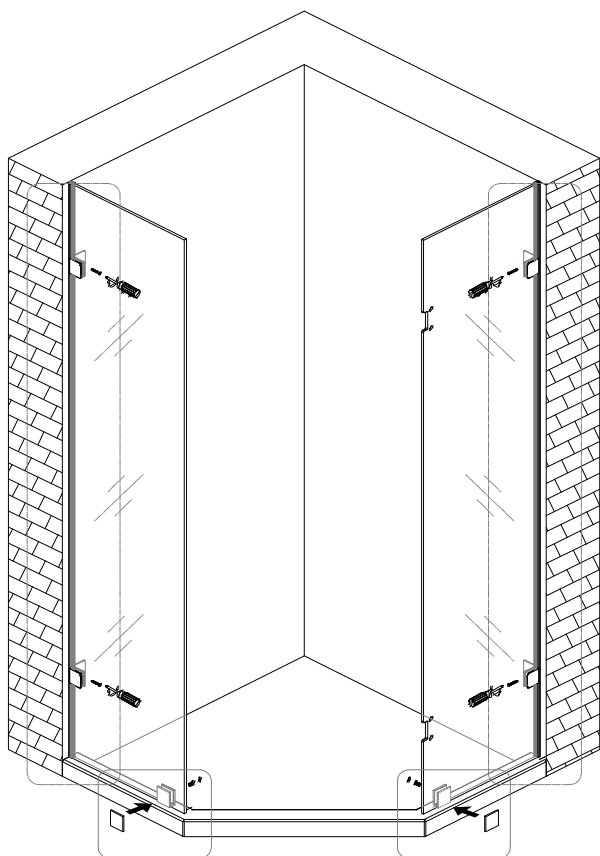


Drawings may not exactly define contour of the product.

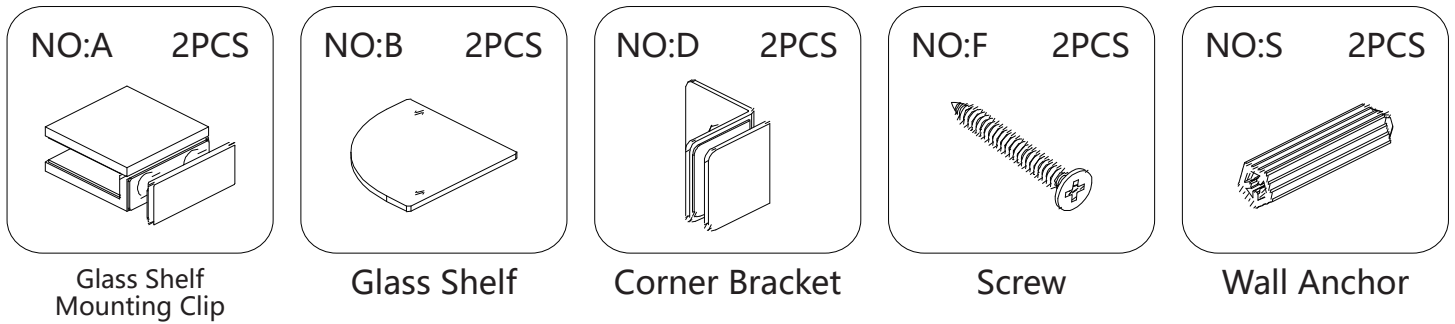


Step 5: Install the Glass Shelves


- 5-1. Install the lower support portion of each glass shelf mounting clip onto the fixed glass panel.
- 5-2. Attach the corner brackets to the wall-facing side of each glass shelf.
- 5-3. Place each glass shelf onto the lower support portion of the glass shelf mounting clip and position the corner brackets against the wall.
- 5-4. Adjust the position of each glass shelf and make sure it is level. Mark the mounting hole locations for the corner brackets on the wall.
- 5-5. Remove the glass shelves and drill holes at the marked locations.
- 5-6. Insert the wall anchors into the drilled holes, ensuring they are flush with the wall surface.
- 5-7. Reposition the glass shelves and align the corner brackets with the wall anchors.
- 5-8. Secure the corner brackets to the wall with screws.
- 5-9. Install the upper portion of each glass shelf mounting clip to secure the glass shelf in place.
- 5-10. Check that both glass shelves are level and securely installed.

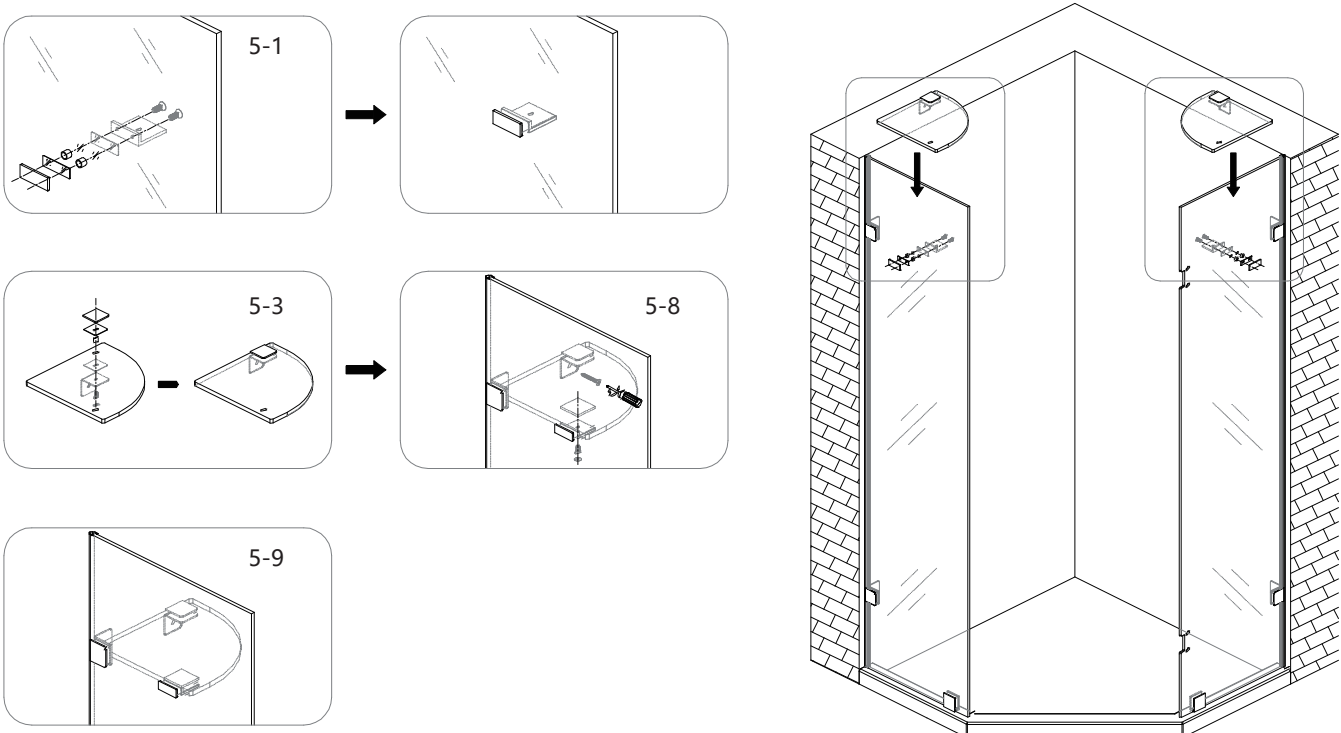


Drawings may not exactly define contour of the product.

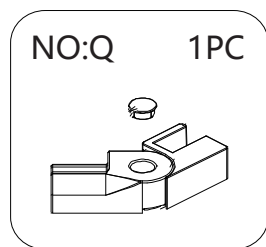


Right Connector

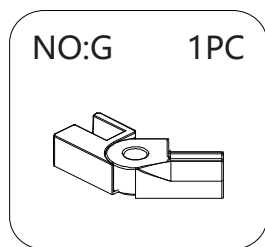


Left Connector

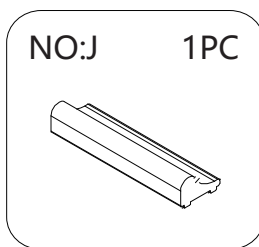

Aluminum Threshold

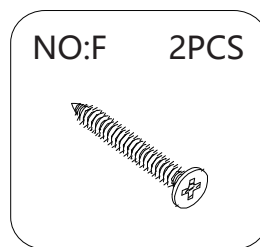



Screw

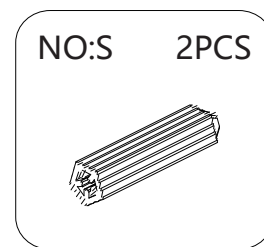


Wall Anchor

Step 6: Install the Aluminum Threshold


- 6-1. Pre-install the left connector, right connector, and aluminum threshold in their installation positions.
- 6-2. Confirm the position and mark the mounting hole locations for the left connector and right connector.
- 6-3. Remove the components and drill holes at the marked locations.
- 6-4. Insert the wall anchors into the drilled holes, ensuring they are flush with the installation surface.
- 6-5. Reposition the left connector, right connector, and aluminum threshold, and align the mounting holes with the wall anchors.
- 6-6. Secure the left connector and right connector with screws.
- 6-7. Check that the aluminum threshold is properly positioned and securely installed.

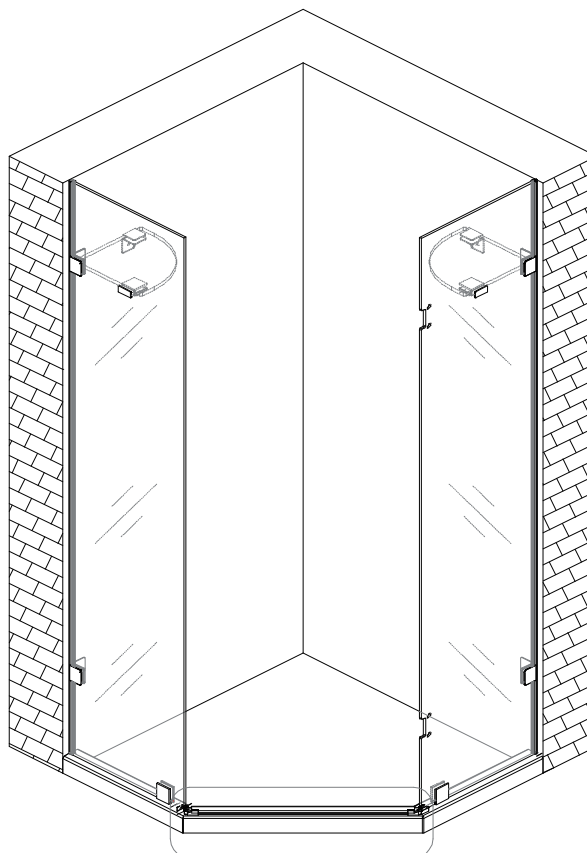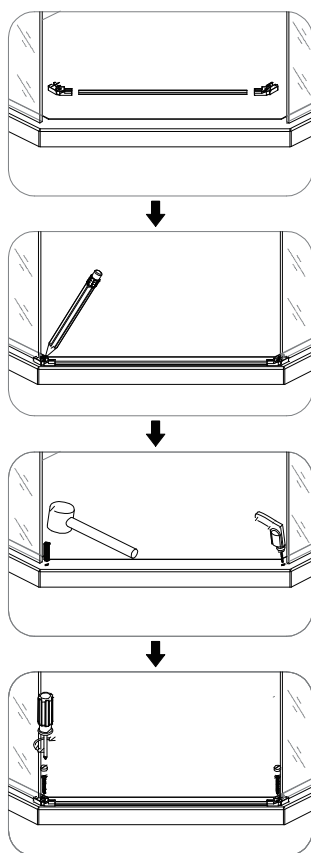

Drawings may not exactly define contour of the product.

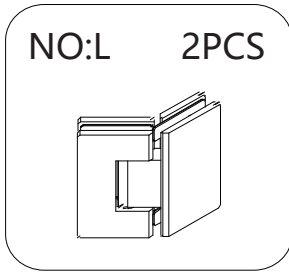




Door Hinge

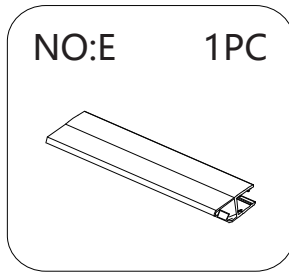


Magnetic Door Seal Strip

Step 7: Install the Door Hinge and Magnetic Door Seal Strip


- 7-1. Install the door hinges onto the hinge fixed glass panel.
- 7-2. Ensure that the door hinges are installed in the correct orientation.
- 7-3. Align the door hinges and keep them level before tightening the fasteners.
- 7-4. Install the magnetic door seal strip onto the magnetic fixed glass panel, ensuring that it is properly aligned.
- 7-5. Do not fully tighten the door hinges until the door glass panel has been installed and aligned.

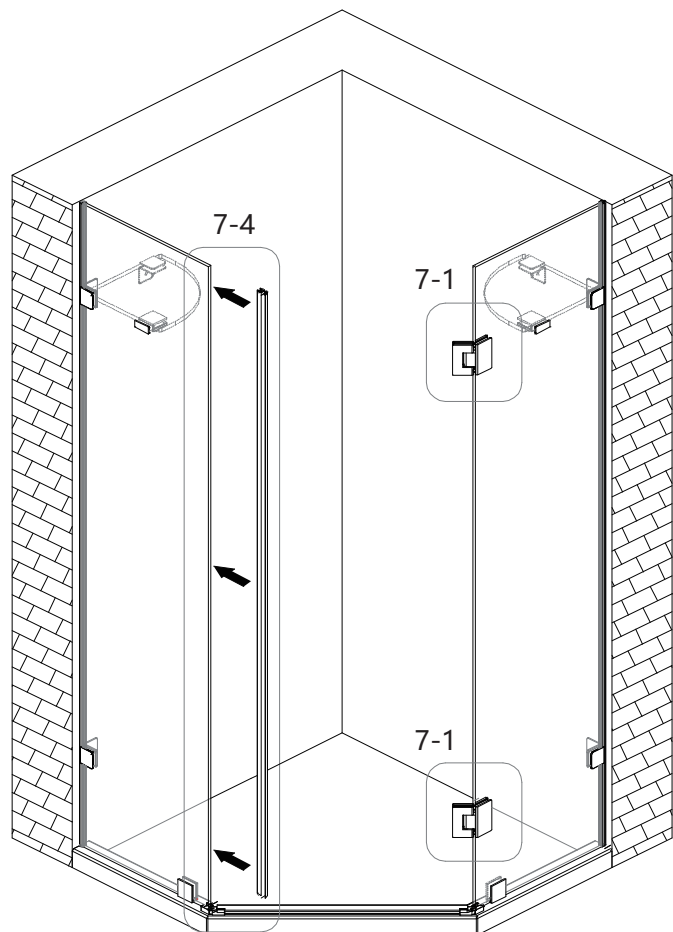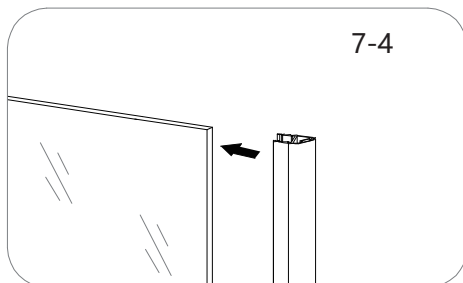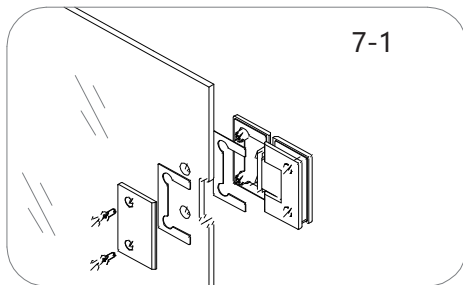


Drawings may not exactly define contour of the product.




Door Glass Panel




Magnetic Door Seal Strip



Waterproof Seal Strip




Door Bottom Sweep



Door Handle

Step 8: Prepare the Door Glass Panel


- 8-1. Install the magnetic door seal strip onto the door glass panel, ensuring that it is properly aligned with the magnetic door seal strip on the magnetic fixed glass panel.
- 8-2. Install the door bottom sweep onto the bottom edge of the door glass panel, ensuring that it is properly oriented.
- 8-3. Install the waterproof seal strip along the door hinge side of the door glass panel.
- 8-4. Install the door handle onto the door glass panel.

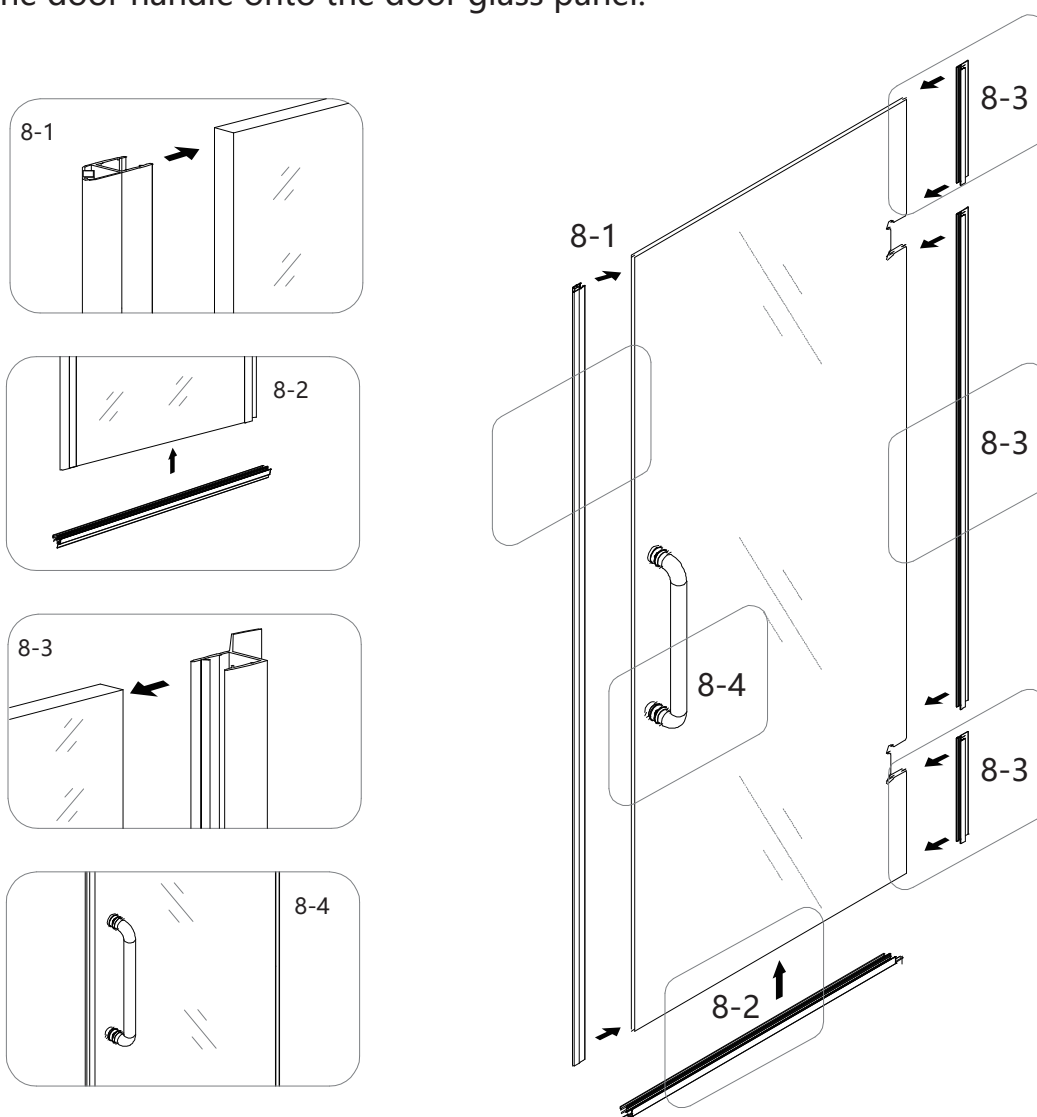

Drawings may not exactly define contour of the product.

Step 9: Install the Door Glass Panel

- 9-1. Carefully install the door glass panel to the door hinges.
- 9-2. Adjust the door glass panel until it is plumb and properly aligned with the fixed glass panels.
- 9-3. Check that the magnetic door seal strips align correctly when the door is closed.
- 9-4. Once the door glass panel is properly aligned, fully tighten the door hinges.

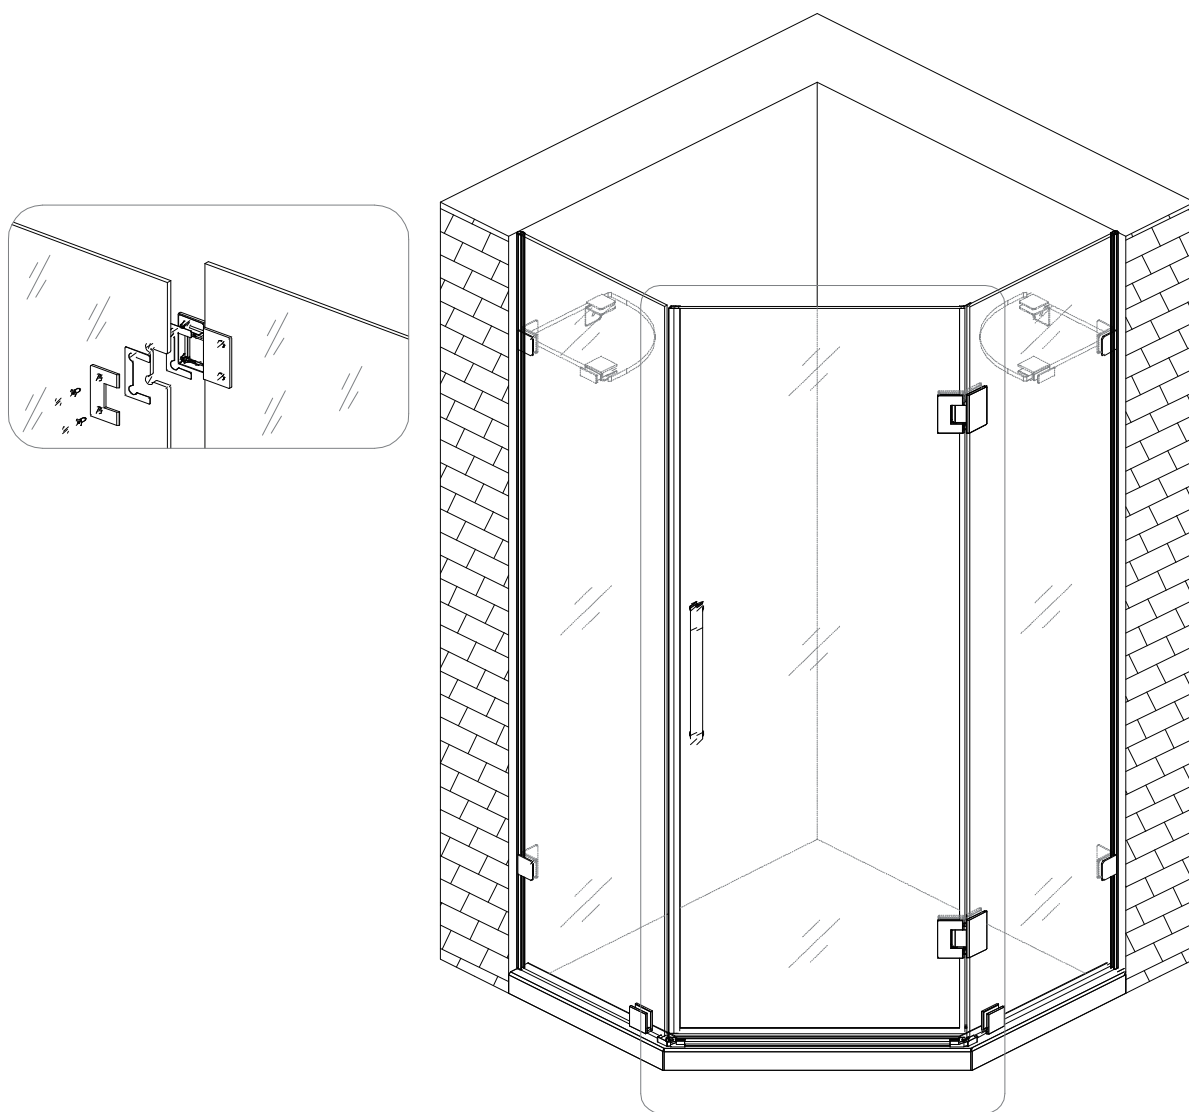


CAUTION : Always support the door glass panel while adjusting or tightening the door hinges.

Drawings may not exactly define contour of the product.

Step 10: Adjust the Door and Check Alignment



Check the following before sealing:

- 10-1. Open and close the door glass panel several times to check for smooth operation.
- 10-2. Verify that the door glass panel closes properly against the magnetic fixed glass panel.
- 10-3. Check that the door glass panel is plumb and properly aligned.
- 10-4. Check the gaps between the door glass panel, hinge fixed glass panel, and magnetic fixed glass panel.
- 10-5. If necessary, adjust the position of the fixed glass panels, door hinges, or aluminum threshold until proper alignment is achieved.

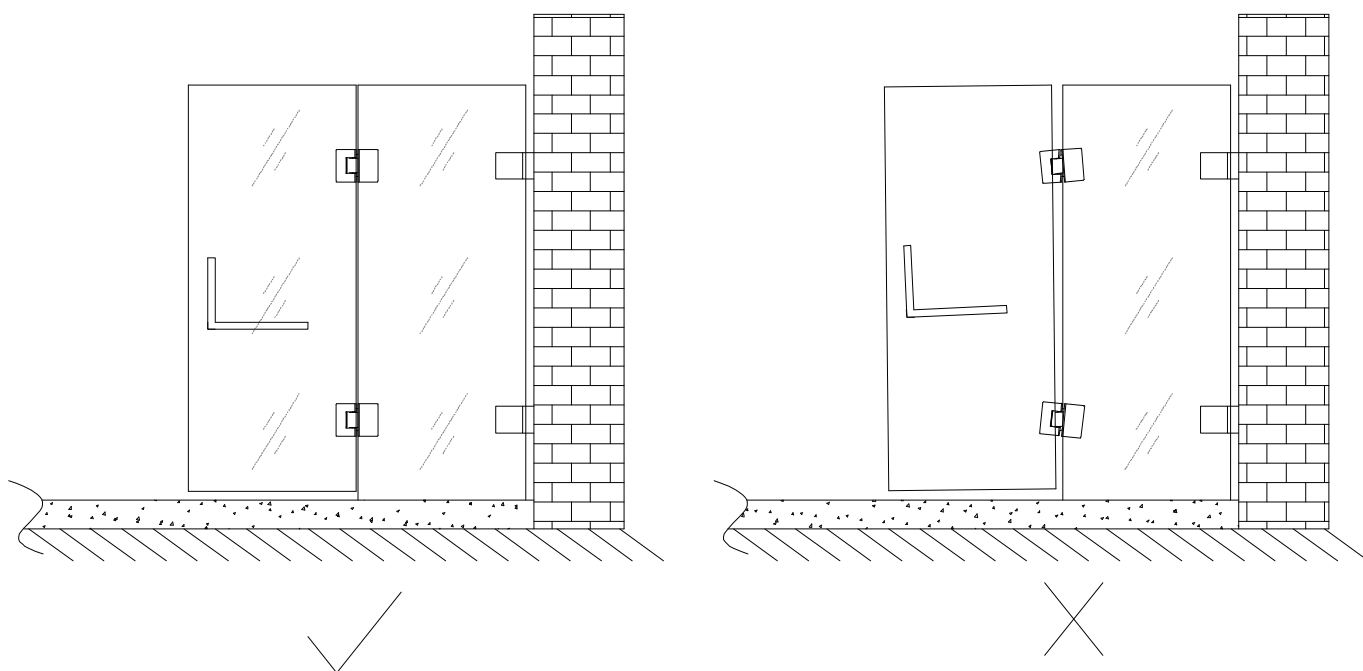


CAUTION : Always support the door glass panel while adjusting or tightening the door hinges.

Drawings may not exactly define contour of the product.

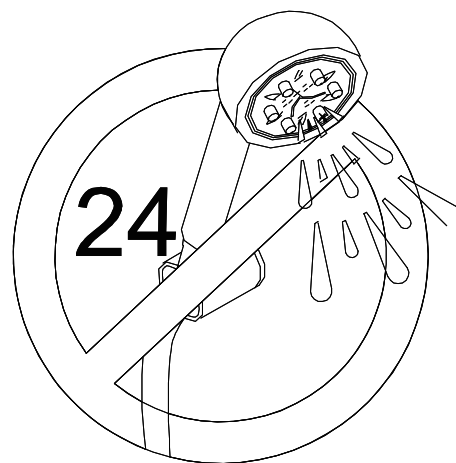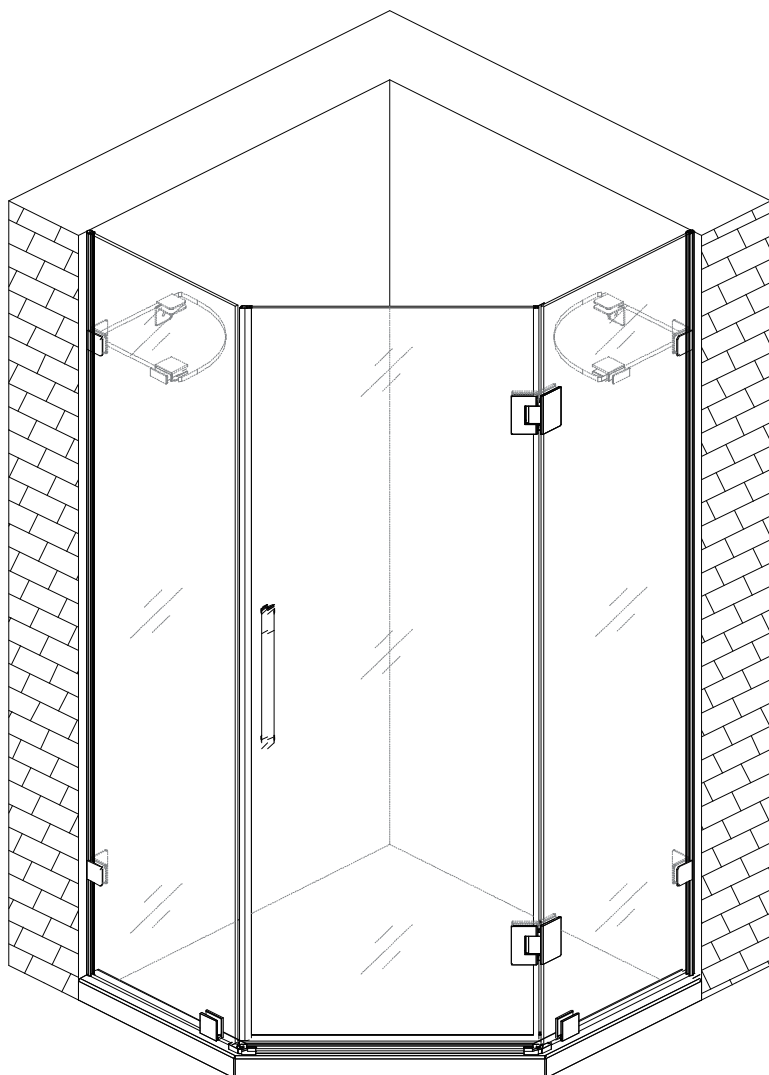

After installation, check for any issues and apply waterproof sealant as needed.

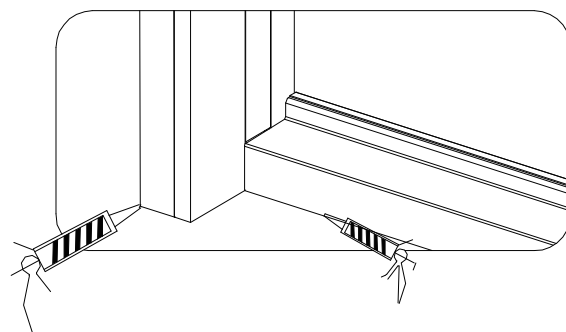

Step 11: Apply Silicone Sealant

- 11-1. After completing all adjustments and confirming that the shower enclosure is properly installed, apply silicone sealant along the required exterior joints for waterproofing.
- 11-2. Do not apply silicone sealant to areas intended for drainage.
- 11-3. Allow the silicone sealant to cure for at least 24 hours before using the shower enclosure.

Drawings may not exactly define contour of the product.

Troubleshooting

Problem	Suggested Solution
Missing Parts	• Check all packaging materials and boxes carefully for missing parts. • Verify the parts against the Parts List. • If any parts are missing, contact customer support for assistance.
Water Leaks Around the Fixed Glass Panels	• Check that silicone sealant has been properly applied to the required joints around the hinge fixed glass panel and magnetic fixed glass panel. • Check that the wall bulb seal and waterproof seal strip are correctly installed and properly seated. • Make sure the shower head is not directed toward the outside of the shower enclosure.
Water Leaks Around the Door Glass Panel	• Check that the magnetic door seal strip is correctly installed and properly aligned. • Check that the door bottom sweep is correctly installed and positioned properly. • Check that the waterproof seal strip is correctly installed along the door hinge side of the door glass panel. • Make sure the shower head is not directed toward the outside of the shower enclosure.
Door Glass Panel Does Not Close Properly	• Check that the door glass panel is properly aligned with the magnetic fixed glass panel. • Check that the magnetic door seal strips are correctly positioned and make proper contact when the door is closed. • Check the alignment and adjustment of the door hinges. • If necessary, readjust the door glass panel and door hinges.
Door Glass Panel Does Not Open or Close Smoothly	• Check that the door hinges are properly installed and securely tightened. • Check that the door glass panel is plumb and properly aligned. • Check the gaps around the door glass panel and adjust the door hinges as needed. • Make sure the door bottom sweep is not rubbing against the aluminum threshold.
Glass Shelf Is Not Level or Stable	• Check that the glass shelf mounting clips are properly installed. • Check that the corner brackets are securely attached to the wall. • Make sure the glass shelf is properly seated in the glass shelf mounting clips. • Adjust the glass shelf as needed and retighten the mounting hardware.
Threshold Is Loose or Misaligned	• Check that the left connector and right connector are properly positioned and securely fastened.
Fixed Glass Panels Are Not Plumb	• Check that the glass floor clips and corner brackets are properly positioned and securely installed. • Use a level to check the hinge fixed glass panel and magnetic fixed glass panel. • Loosen the relevant mounting hardware, adjust the glass panels, and retighten as needed.

Still Not Resolved?

If the issue persists, please contact us with your model number, photos or videos of the issue, and proof of purchase:

www.deervalleybath.com | (312) 626-9466 | service@deervalleybath.com

LIMITED WARRANTY COVERAGE

FIVE YEARS LIMITED WARRANTY

DeerValley products are made with quality materials and excellent craftsmanship to provide customers with a long-lasting product. If any defects in materials or craftsmanship are found under normal use within the first five year of delivery, DeerValley will provide replacement parts at no charge or, at its option, replace any product or part of the product deemed defective under normal installation, use, service, and maintenance. This warranty applies only to the original purchaser. Proof of purchase will be required to process any claims. **SCRATCHES ARE NOT COVERED UNDER WARRANTY.**

The manufacturer warrants that this product will be free from manufacturing defects for the duration of the above-mentioned warranty period. Please retain a copy of the original invoice as proof of purchase.

DeerValley will, at its option, (1) repair or replace the defective part(s) or product(s) at no charge; (2) issue a refund for the original purchase price of the product(s) (valid within 30 days from the date of delivery); or (3) issue a credit to be applied toward the purchase of a new DeerValley product. Shipping/delivery charges may apply and are at DeerValley's sole discretion.

DeerValley recommends that installations be performed by a licensed, professional plumber. DeerValley will not be held responsible for any damage or product failure resulting from improper installation, misuse, or failure to hire a licensed professional. Additionally, DeerValley is not responsible for any removal or installation costs.

This limited warranty does not cover goods that have been subjected to accidents, negligence, improper installation, product abuse, product misuse, or the use of cleaners containing abrasives, alcohol, or other organic solvents. Such exclusions apply regardless of whether the actions were performed by a contractor, service company, or the purchaser.

DeerValley's responsibility under this limited warranty is limited solely to the replacement of parts and does not cover any other costs. DeerValley will not be responsible for labor charges or any damage incurred during installation, repair, or replacement, nor for any indirect, incidental, or consequential damages, losses, injuries, or costs of any kind related to this product. Except as required by law, this limited warranty replaces and excludes all other warranties, conditions, and guarantees, whether expressed or implied, statutory or otherwise, including but not limited to those regarding merchantability or fitness for a particular purpose.

RESPONSIBILITIES OF OTHERS

It is the responsibility of the installer or building contractor, acting on behalf of the user, to inspect the unit prior to installation. They are responsible for ensuring that the unit is free from defects or damage.

Notices are placed on and within the unit, as well as on the shipping carton, to inform the installer of their responsibility.

If a problem is identified, the unit must not be installed. DeerValley is not responsible for failures or damage that could have been identified, repaired, or prevented through proper inspection and testing prior to installation.

Damage occurring during transit is the responsibility of the carrier. The user or installer must open the crate and inspect the unit for damage upon delivery. If damage is discovered, it must be reported immediately to the seller and the carrier in writing, and an inspection must be requested. If the carrier fails to respond, the issue should be reported to both the seller and the carrier. Freight claims should be filed promptly thereafter.

LIMITATIONS AND EXCLUSIONS

This warranty does not cover negligence, misuse, abuse, improper installation, carelessness, accidents, hard water or mineral deposits, exposure to corrosive materials, misapplication, damages resulting from improper maintenance, alteration of the product, or failure to follow the care or installation instructions provided with your product. The warranty becomes void if the DeerValley product is altered or if repairs are attempted using unauthorized accessories or parts not provided by DeerValley.

DeerValley is not liable for the loss of use of its products, inconvenience, or any other incidental or consequential costs, expenses, or damages. Please note that some states do not allow the exclusion or limitation of incidental damages.

DISCLAIMER

Except as expressly stated, no warranties or obligations, whether express, implied, oral, or statutory, are provided. No dealer or other individual has the authority to make any warranties or representations regarding DeerValley or its products. DeerValley shall not be held responsible for any such unauthorized warranties or representations.

WARRANTY SERVICE

NOTE: When requesting warranty service, please ensure you have the following:

- A copy of the original invoice
- Date of installation
- Description and pictures of the defect
- Model number or product description

To obtain warranty service or replacement parts, contact DeerValley Customer Service. DeerValley will determine whether to repair or replace the product, issue a refund, or provide a credit.