

INSTALLATION INSTRUCTION

LED Bathroom Mirror

E-MI-012532

East Grove

• H O M E •

CAUTION: To prevent electrical shock, ensure electricity has been turned off at the circuit breaker before beginning.

- Read all instructions before installing.
- System is intended for installation by a licensed electrician in accordance with the National Electrical Code (NEC) and local regulations.
- When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.
- Retain installation instructions for future maintenance reference.

WARNING: All parts must be used as indicated in these instructions. This product is designed for use only with the supplied parts and/or accessories designated for use by EastGroveHome. Substitution of parts or accessories not designated for use with this product by EastGroveHome could result in personal injury or property damage, and will void the warranty. Contact an authorized dealer or the manufacturer if any parts are damaged or missing.

MAINTENANCE NOTE: Coastal conditions may cause mineral and residue build-up on the fixture. We recommend that customers in coastal areas clean all external surfaces of the fixture once every two weeks with a wet cloth.

MISE EN GARDE: Pour éviter tout choc électrique, assurez-vous que le disjoncteur soit mis hors tension avant de commencer.

- Lisez toutes les instructions avant l'installation.
- Le système doit être installé par un électricien licencié conformément au code national de l'électricité (NEC), et également aux règlements locaux.
- Lors de la manipulation du luminaire, n'appuyez pas sur les LED. Tenez-le uniquement par la base.

ATTENTION: Toutes les pièces doivent être utilisées comme indiqué dans ces instructions. Ce produit est conçu pour être utilisé seulement avec les pièces et/ou accessoires fournis pour être utilisés avec les produits EastGroveHome. Remplacer des pièces ou accessoires non conçus pour ce produit EastGroveHome pourrait causer des dommages corporels ou matériels et pourrait également causer l'annulation de la garantie. Veuillez contacter un revendeur autorisé ou le fabricant si des pièces manquent ou sont endommagées.

NOTE D'ENTRETIEN: Les conditions côtières peut causer une accumulation de minéraux et de résidus sur le luminaire. Nous recommandons aux clients qui résident dans les zones côtières de nettoyer toutes les surfaces externes du luminaire une fois toutes les deux semaines avec un chiffon humide.

HARDWARE

A



Wire Connector
Qty: 3pcs

B



Wood Screw
Qty: 3pcs+1 Extra

C



Plastic Anchor
Qty: 3pcs+1 Extra

Fig.2 Wiring



Fixture Wires

Black

Fixture Wires

White

Fixture Wires

Green

House Wires

Black
(Hot)


House Wires

White
(Neutral)

House Wires

Green or Bare Copper
(Ground)

Fig.1

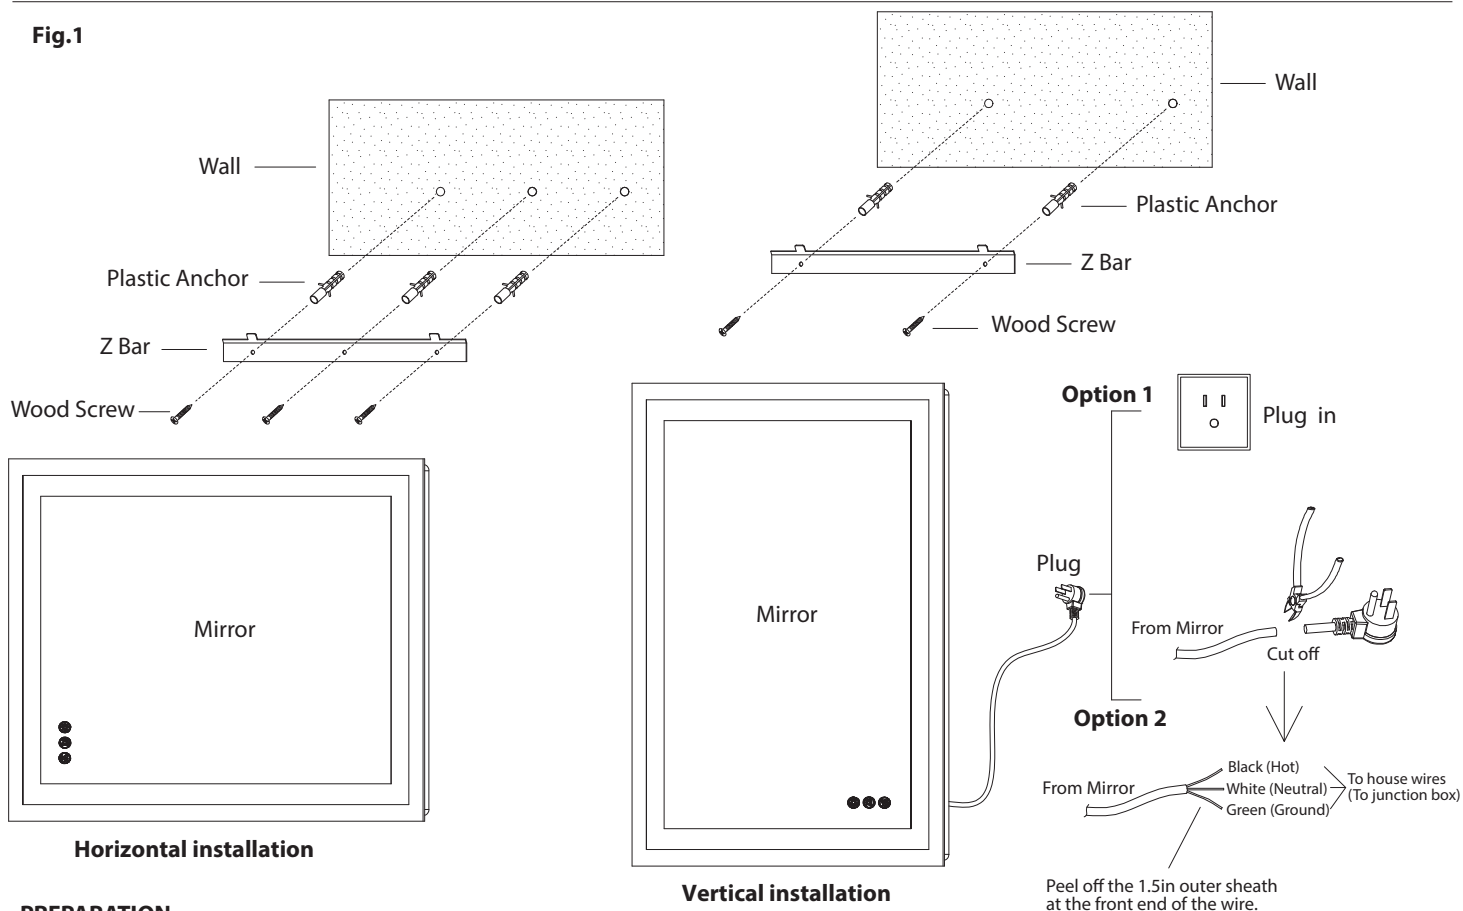

PREPARATION

1. Shut off the power at the circuit breaker.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 1)

3. Attach Z bar to the wall surface with included screws and plastic anchors.

Note: Mirror can be installed vertically or horizontally. Pay attention to choosing the Z-Bar of the corresponding length.

CONNECTING THE WIRES (Fig. 1 \ Fig.2)

4. Two option for power connection: Powered by plug in or hardwired.Choose according to your actual needs.(Fig.1)
 - (i) Option 1: Connect to outlet on the wall.
 - (ii) Option 2, Hardwired: Cut off the plug of the fixture's wire and peel off the 1.5-inch outer sheath at the front end of the wire. Connect the fixture's input wires to junction box wires as shown (Fig. 2). Make sure that all wire connectors (A) are secure. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it.

COMPLETING THE INSTALLATION (Fig. 1)

5. Align the installation hole of the mirror with the Z bar and hang the mirror onto the Z bar in the wall.
 Turn on the power after installation, check the fixture can work well.(Fig1)

LIGHTING CONTROL INSTRUCTIONS

1. All touch key indicator light is blue when it is turn off and white when it is turn on.
2. Gently press the  key to turn on the light or off.
3. When the light is turn on, press the  key to change the color temperature of the light.(Three types of light colors:3000K 4000K 6000K)
4. When the light is turn on, press and hold the  key to adjust the brightness.(Brightness range: 10%,-100%)
5. Press the  key to turn on or off the defogging function.When the defogging function is turn on, it will automatically turn off one hour later.