


- A- Wire nuts**
- B- Outlet box screws**
- C- Mounting strip**
- D- Canopy**
- E- Screw collar loop**
- F- Washer**
- G- Nipple**
- H- Green ground screw**
- I- Hex nut**
- J- Chain**
- K- Loop**
- L- Fixture**
- M- Glass shade**
- N- Socket ring**
- O- Bulb(not included)**

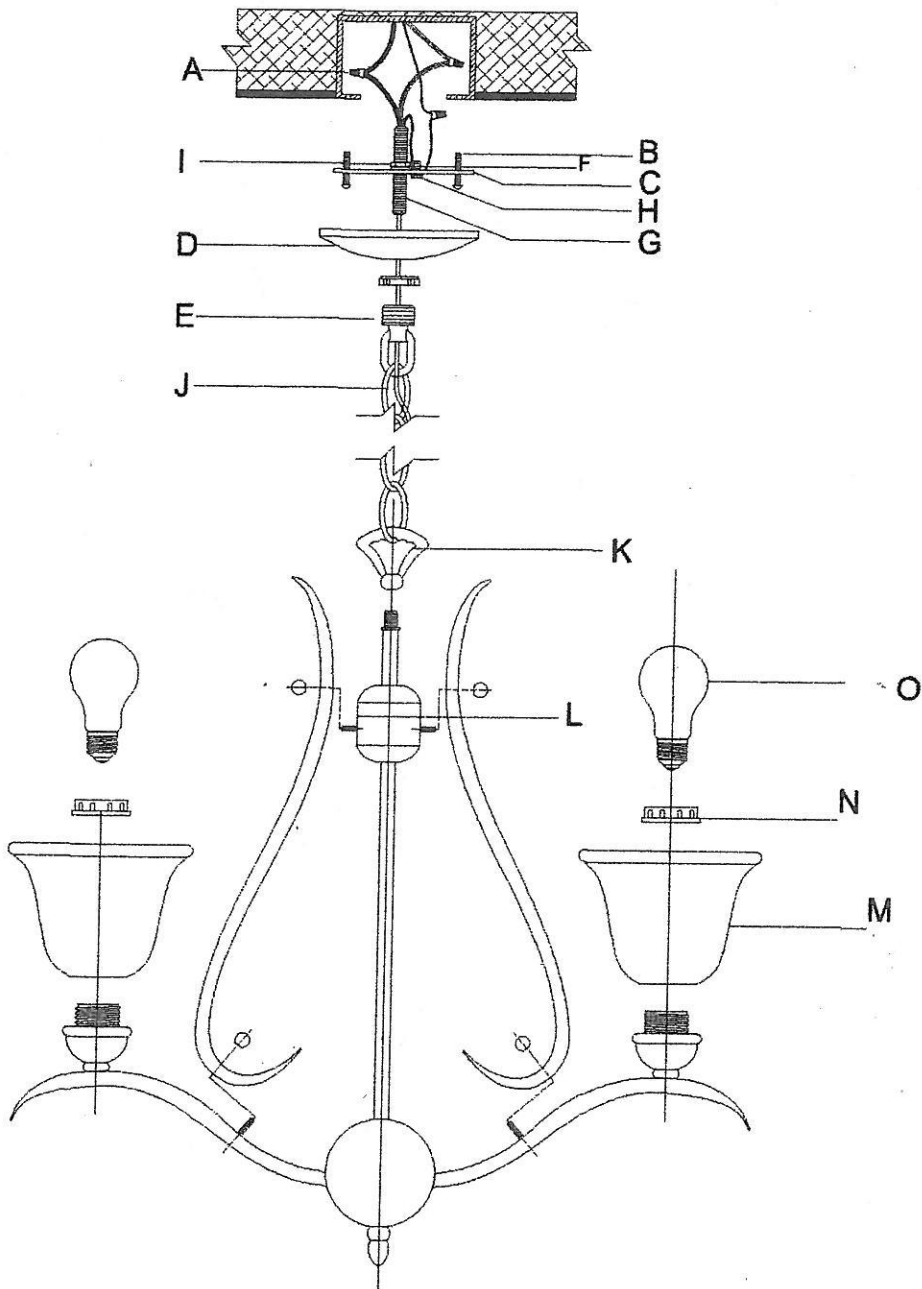

ASSEMBLY INSTRUCTIONS

NOTE :Only the technical personnel can be allow to fix and maintain.

IMPORTANT!

Make sure that the power is switch off at the electricity mains supply before commencing work.

FIXING INSTRUCTIONS

1. Connect the wires using wire nuts (A) (live wire connect the live wire, natural wire connect the natural wire, then attach copper wire around the green ground wire screw (H).)
2. Attach screw collar loop(E) to nipple(G), tighten nut.
3. Screw the loop(K) into the fixture(L).
4. Install glass shades(M).
5. Install light bulb(O). Use only 5-60Watt or less bulb.

REPLACEMENT BULB

Do not exceed the maximum wattage.

Light bulbs recommended:

5X60W Max.120V E27

CLEANING CARE

Clean with a soft dry cloth.

SAFETY INFORMATION

Do not touch the bulb with bare hands.Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.