



Hardware Package(included):





Ø12*100MM*1PCS

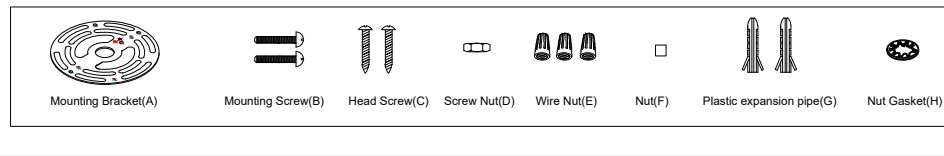

Ø12*250MM*3PCS



(Ø12*100MM*1PCS+
Ø12*250MM*3PCS)

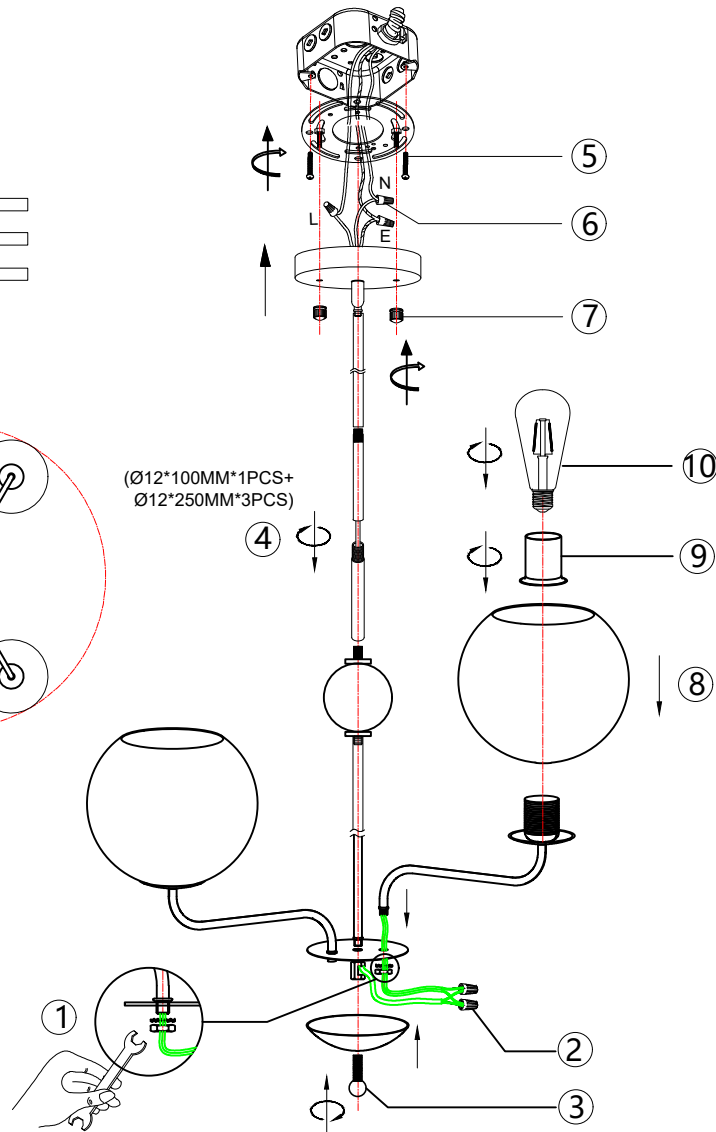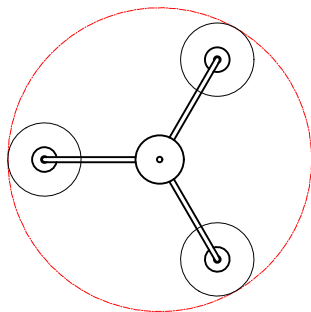

ASSEMBLY & INSTALLATION INSTRUCTIONS

WARNING: TO REDUCE THE RISK OF ELECTRICAL SHOCK, TURN OFF THE POWER AT THE CIRCUIT BREAKER OR FUSE BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Installation Steps

Turn off the power at fuse or circuit box

ASSEMBLY OF THE FIXTURE BODY

Please check that all accessories are included before starting installation.

Step 1: Insert the lamp arm into the circular plate and secure it with a nut.

Step 2: Connect the white wire from the lamp holder to the white wire from the lamp arm, and the black wire from the lamp holder to the black wire from the lamp arm. Secure all connections with wire nuts.

Step 3: Place the semi-circular cover onto the fixture and fix it in place using the round metal ring.

Step 4: Select the appropriate suspension tubes. Position the decorative sphere between the two tubes. Thread the main wire through the tubes, tighten them, and then attach the ceiling mounting plate.

Step 5: Use two mounting screws to secure the mounting bracket to the outlet box.

Step 6: Pull the electrical wires from the outlet box and make the following connections using the included wire nuts:

- Connect the fixture's black (hot) wire to the black (hot) wire from the power supply.
- Connect the fixture's white (neutral) wire to the white (neutral) wire from the power supply.
- Connect the fixture's bare copper (ground) wire to the house ground wire.
- Carefully tuck the connected wires back into the outlet box.

Step 7: Align the fixture body with the mounting bracket by lining up the holes on the backplate. Insert the fixture screws and secure them using two ball nuts.

Steps 8 – 9: Unscrew the metal ring from the E26 socket. Place the glass shade over the socket, then screw the ring back on to secure the glass.

Step 10: Install an E26 base bulb (not included). Refer to the relamping label near the socket or the product packaging to confirm the maximum allowed wattage.

Turn on the power—installation is now complete.

Attention

1. Installation should be performed by a licensed electrician.
2. Due to variations in display settings, the actual color may differ slightly from the images shown.
3. Because the lamp body is measured manually, there may be a deviation of up to 1/2 inch.
4. If there are any quality issues, missing parts, or other problems with the item, please feel free to contact us.