

INSTALLATION MANUAL CHANDELIER




TOOLS REQUIRED



Ladder



Pliers



Wire Strippers



Screwdrivers

INSTALLATION KIT

A Mounting Bracket

B Canopy

C Loop Ring

D Chain

E Hanging Rod

F Top Lamp Frame

G Square rod

H Bottom Lamp Frame

M5 Screw

M3 Screw


 A Mounting Bracket 1X	 B Canopy 1X	 C Loop Ring 1X	 D Chain 1X	 E Hanging Rod 1X
 F Top Lamp Frame 1X	 G Square rod 4+4X	 H Bottom Lamp Frame 1+1X	 AA Wire Nut 3X	 BB Outlet Box Screw 2X
 CC Expansion screw 4X	 DD Wood Screw 4X	 EE Diamond-shaped clear crystal sheet 16X	 FF Diamond-shaped smoky grey crystal pieces 16X	 GG A string of four octagonal beads 92X
 HH Two strings of octagonal beads 258X	 II Diamond crystal ball 1X	 JJ Small round cap/full teeth/rubber pad 32X	 Gloves 2X	

- NOTE:
- 1.A/C has already been pre-installed with Canopy(B).
 - 2.M3 screws /M5 screws are pre-installed on the square rod (G).
 - 3.Some extra hardware may be included,The quantity listed above is the number required for installation.
 - 4.Connect the Top Lamp Frame(F) and Bottom Lamp Frame (H) with square rod rods(G), and fix them with M5 screws and M3 screws.
 - 5.Pass the wires through the Hanging Rod(E) , Chain (D),Loop Ring(C) and Canopy(B) in order.


MOUNTING AND WIRE

1. Take out Mounting Bracket

Loosen the Loop Ring (MM) from the canopy(A),and take out the mounting bracket(AA).




2-1. Installation Method One:Installation bracket method for solid wood ceiling structure.

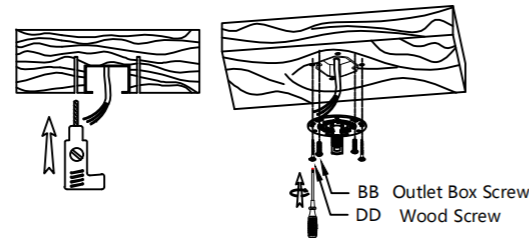


Mark and drill screw holes on the installation position of the solid wood ceiling with the installation bracket (using a 1/8" drill bit). Mount the mounting bracket with wood screws(DD)and Outlet Box Screw(BB).

2-2. Installation Method Two:Installation method of cement ceiling structure installation brackets.

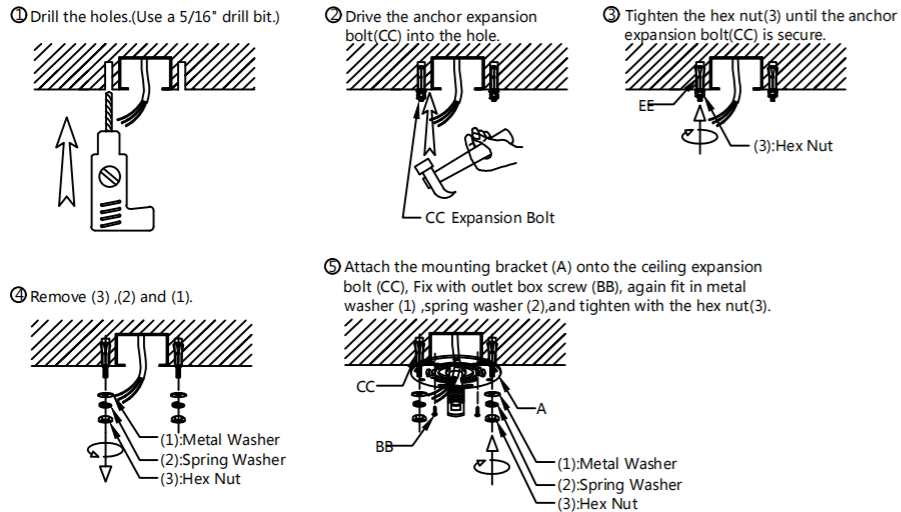

4. Connect the wires

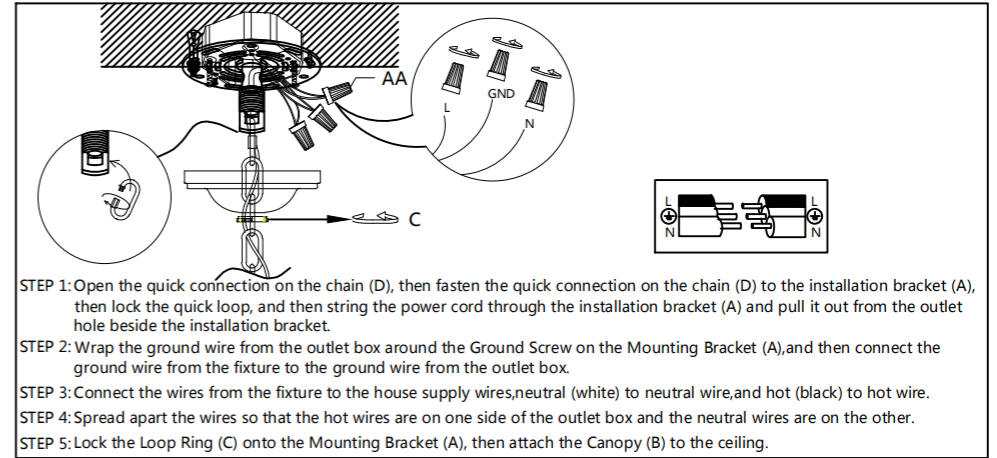

INSTALL CRYSTAL AND BULBS

