

Lighting


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

WALL LAMP

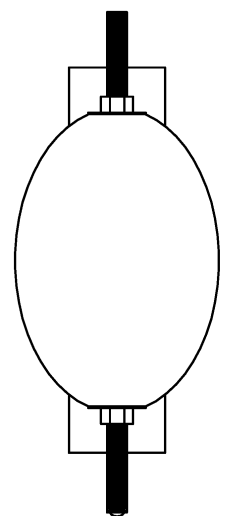


VL10001BKGD

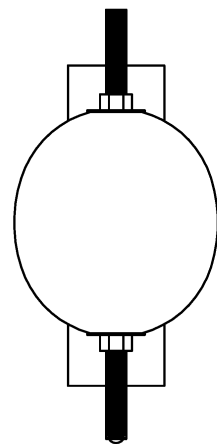

VL10002BKGD

TOOLS REQUIRED

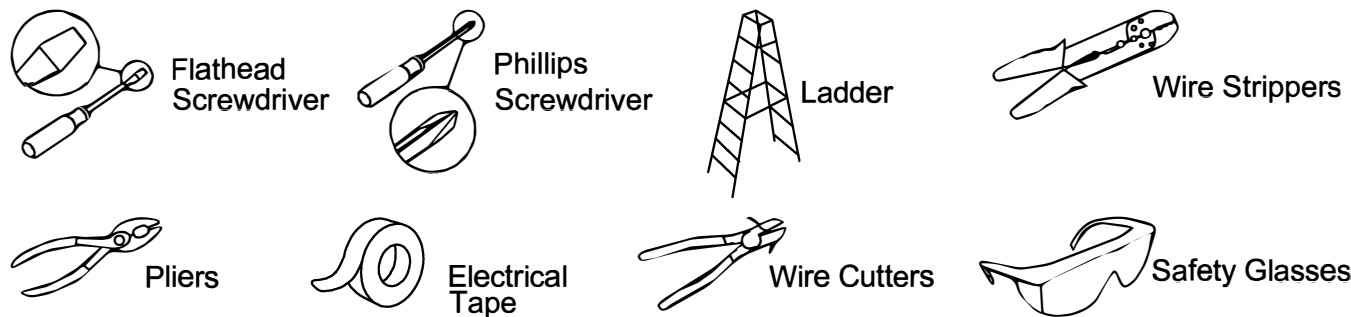

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION
A	Mounting plate
B	Outlet box screw
C	Gecko screw
D	Tapping screw
E	Wire nut

PIECE	DESCRIPTION
F	Mounting screw
G	Fixture body
H	Glass Shade
I	Round iron sheet
J	Aluminum nut

INSTALLATION

1. Attach the mounting plate(A) to the junction box with outlet box screw (B) and Tapping screw(D).
2. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (black) and white to (white).
3. Attach the fixture body(G) to the mounting plate(F) with mounting screw(E).
4. Install the Glass Shade (H) and the Round iron sheet(I), to the fixture body(G), and then secure them with Aluminum nut (J).
5. Select your favorite color temperature (CCT) from three options: 3000K, 4000K, or 5000K by the slide switch located on the side of the box.

