

How to Install & Adjust Keyboard Tray

features an adjustable-height keyboard tray that connects to the metal frame directly below the top wooden panel.



Properly installed keyboard tray.

THE COMPONENTS



2pcs L-Brackets:

Used to connect the keyboard tray to the top level's metal frame, directly under the wooden panel.

2pcs Extra Metal Spring:

USE: Their use is optional and will make raising/lowering easier for heavier monitors.

INSTALLATION: Raise to max height and connect the springs under the middle level, just like the pre-installed springs under the top level.

KEYBOARD TRAY INSTALLATION



- 1) Screw the L-Brackets to the top panel
 - 1 on the left and 1 on the right
 - Locking Lever should face out
 - The "L" should face inwards.



- 2) Connect the Keyboard Tray to the L-Bracket
 1. Remove the 2 black screws on the left and right L-brackets.
 2. Place the Keyboard tray on the L-Brackets.
 3. Insert the black screws from the top, through the keyboard tray into the L-Bracket.



- 3) Properly installed keyboard tray.

How to Install & Adjust Keyboard Tray

MOUSE PAD INSTALLATION



1) Vertically insert the “tongue” of the mouse pad into the slot on the left or right side.



2) Roll the mouse pad to the outside so it is flush with the keyboard tray.



3) The mouse pad easily connects to the right or left side of the keyboard tray.


HOW TO ADJUST THE KEYBOARD TRAY'S HEIGHT



1) Release the locking lever on **both** the right and left L-brackets.
- An unlocked lever is flipped outward.



2) Adjust your keyboard to the desired height.
- Lock the L-Brackets in place.
- A locked lever is flipped downward.

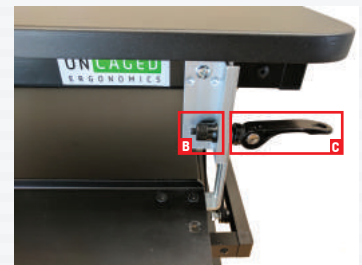

How to Tighten The Locking Lever:

- A. Unlock the lever.
- B. Hold the nut.
- C. Screw in the lever.
- D. Lock the lever.