


HAMMOCK W/SHADE ASSEMBLY MANUAL

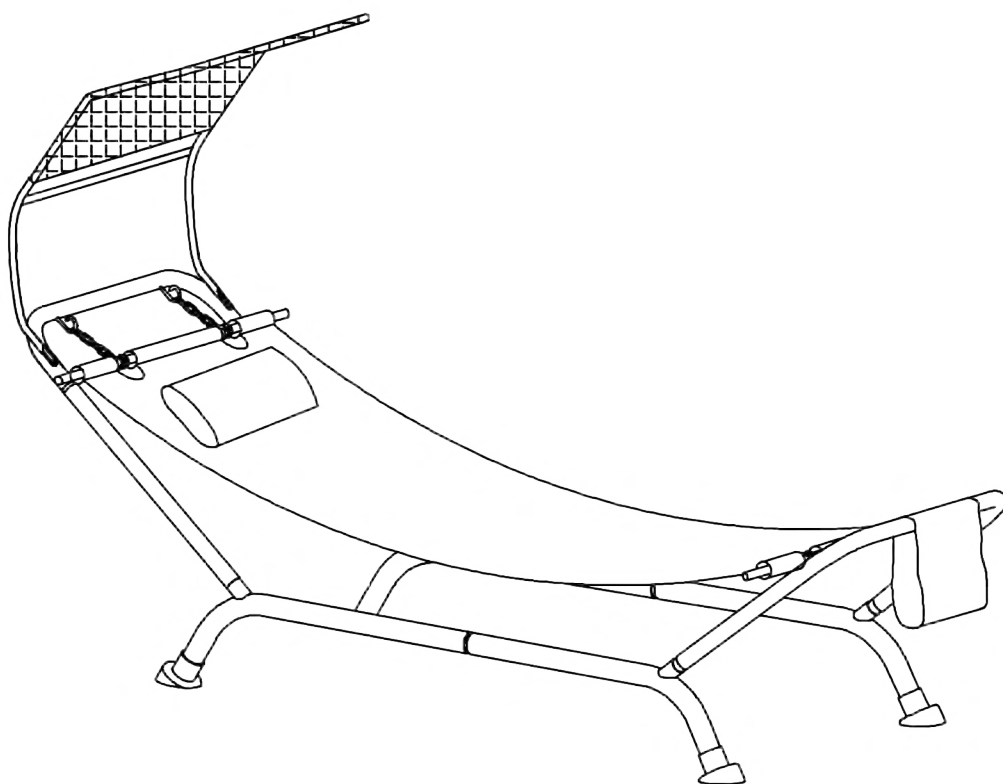

Assembly Instructions

- Prior to assembly, ensure that you lay out and identify all the parts listed in the parts list.
- Tighten all nuts and bolts securely. Hand-tighten all bolts before use. Avoid using power tools or applying excessive force during assembly and bolt tightening.
- Install at a minimum distance of 6 feet from any obstructions, such as fences, garages, houses, overhanging branches, laundry lines, or electrical wires.
- It is recommended to be at least 2 people for a safe assembly of the product.























Care and warranty

- The weight capacity of this swing chair is 350 lbs.
- Clean the frame components and fabric with a mild soap solution, then rinse thoroughly. Avoid using bleach, acid, or any other solvents on either the fabric or frame components.
- For the best performance and safety of your chair, inspect and tighten all bolts and fasteners regularly


Warning:

1. Do not kneel or stand on swing chair.
2. Do not exceed 350lbs weight limit.
3. Make sure swing is located on a solid level surface.
4. Put away the cushion when it's rain or snow.


PART LIST

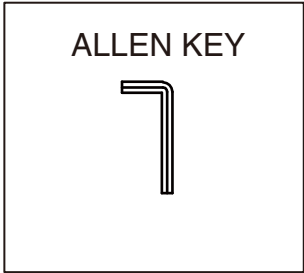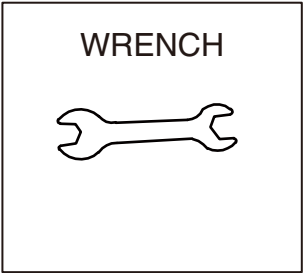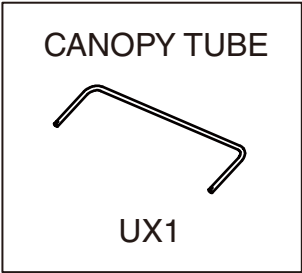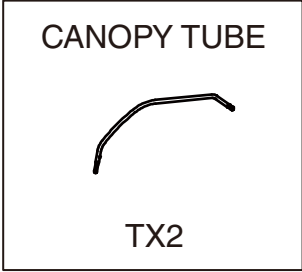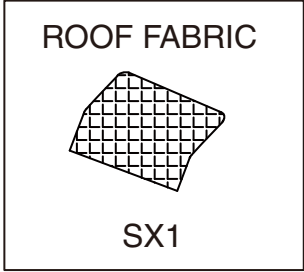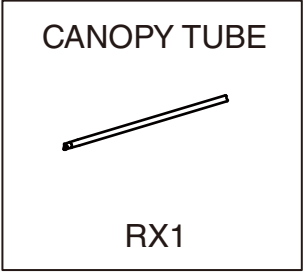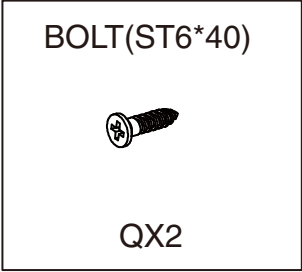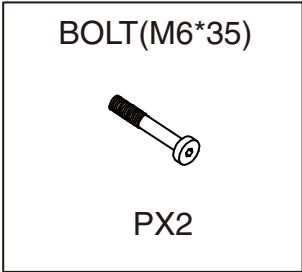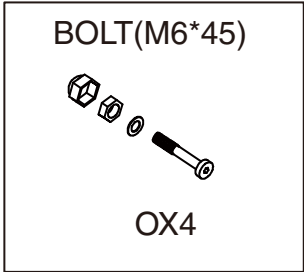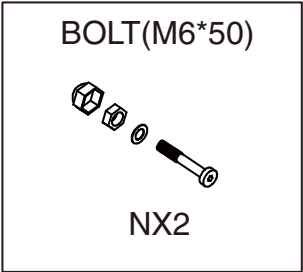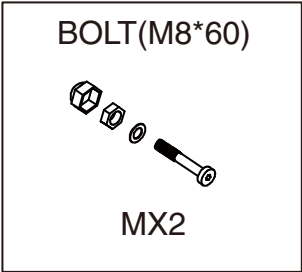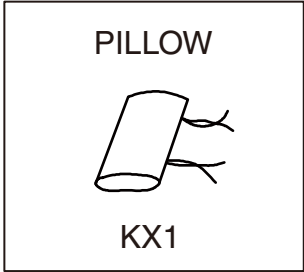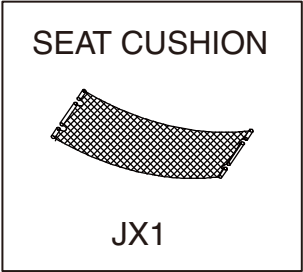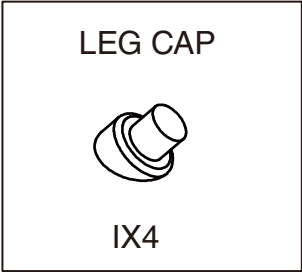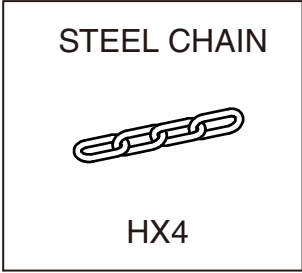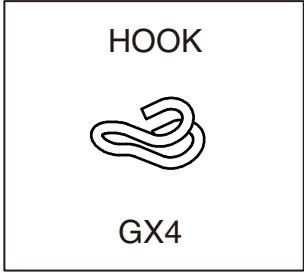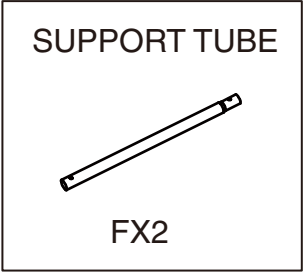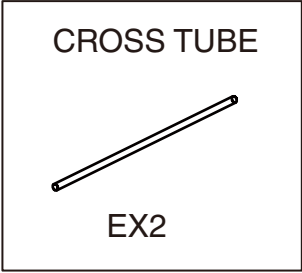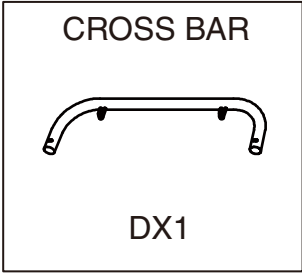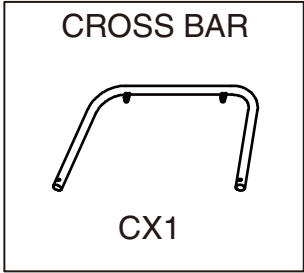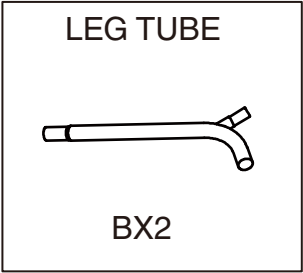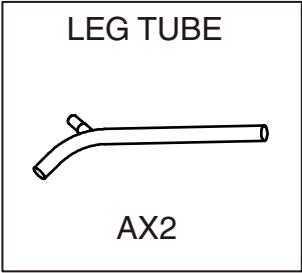


Step 1: First, connect the leg tubes (part A) and (part B) together using bolt M, as shown in the diagram. Then, pull the magazine bag (part L) onto the crossbar (part C), as shown in the diagram.

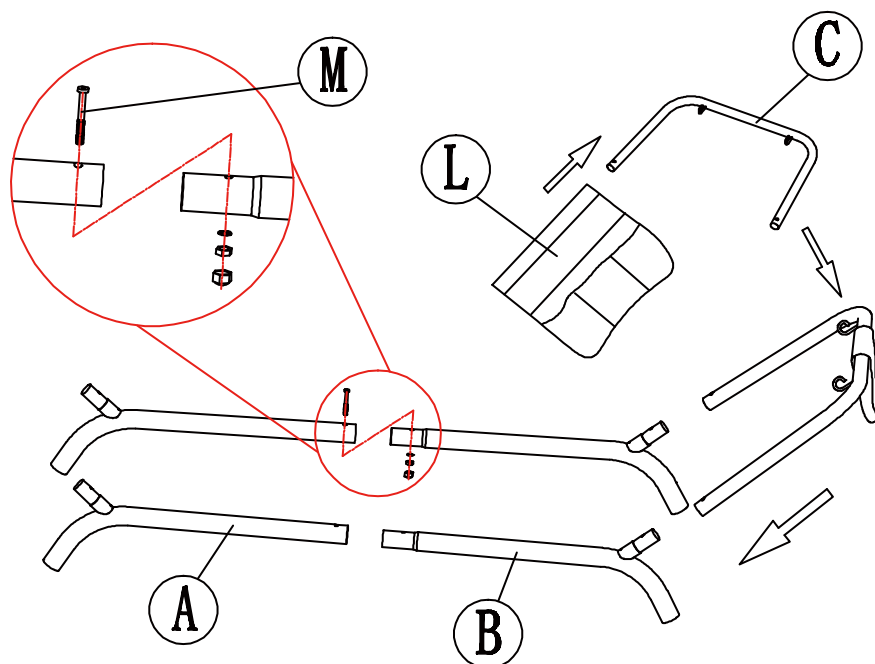


Step 2: Connect part F and part D to the leg tube (part A + B) using bolt O, as shown in the diagram. Affix part C to the legs using bolt O, as shown in the diagram.

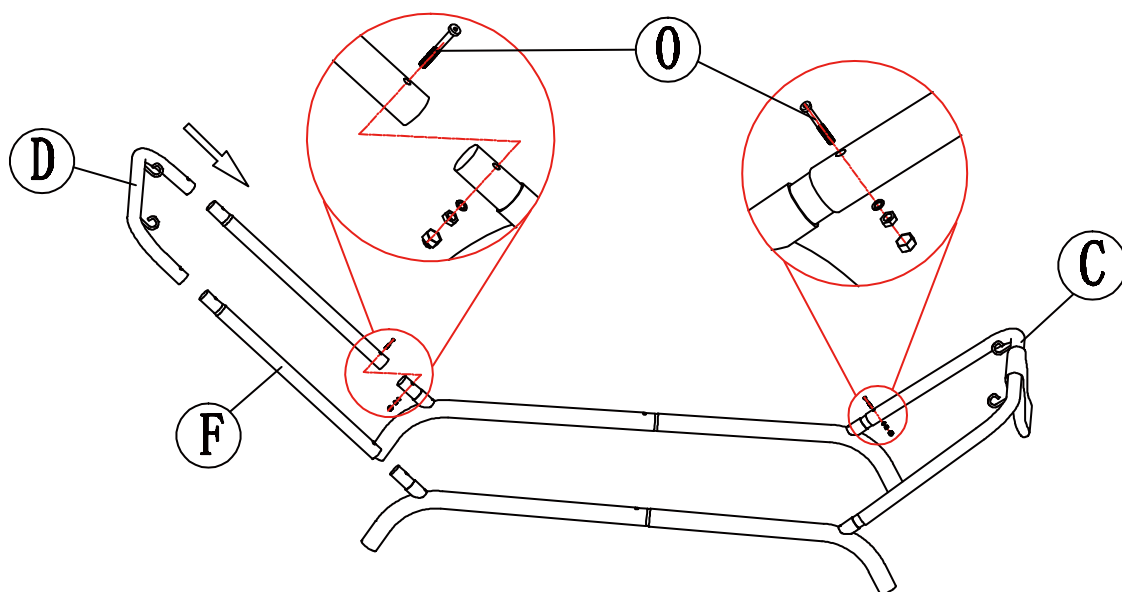


Step 3: Affix leg caps (part I) as shown in diagram.

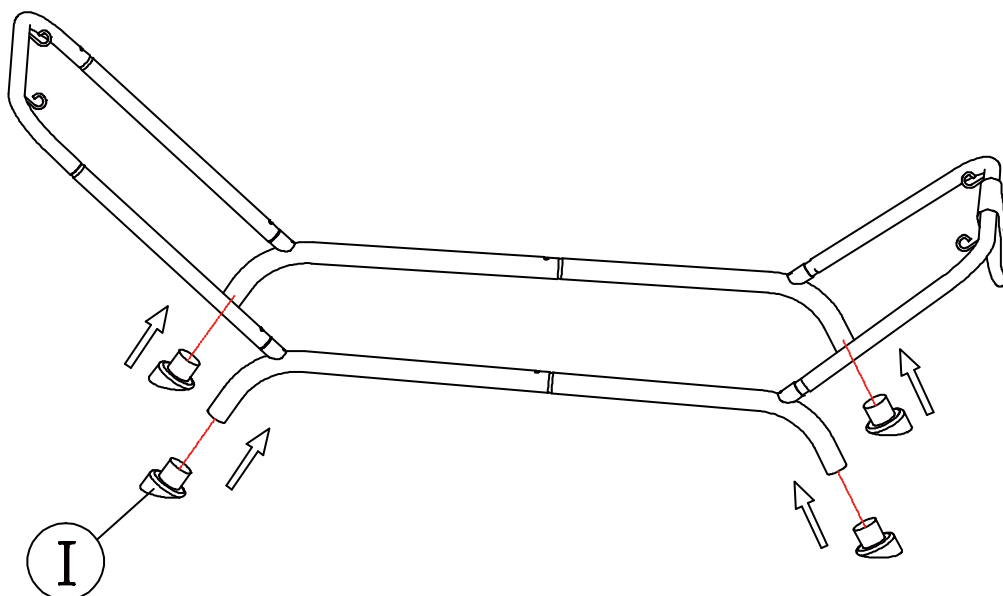


Step 4: Attach the Support cross tube (Part E) to the seat cushion, then connect the hook (Part G) and steel chain (Part H) to the cushion, and finally, secure the pillow (Part K) onto the hook (Part G) as indicated in the diagram.

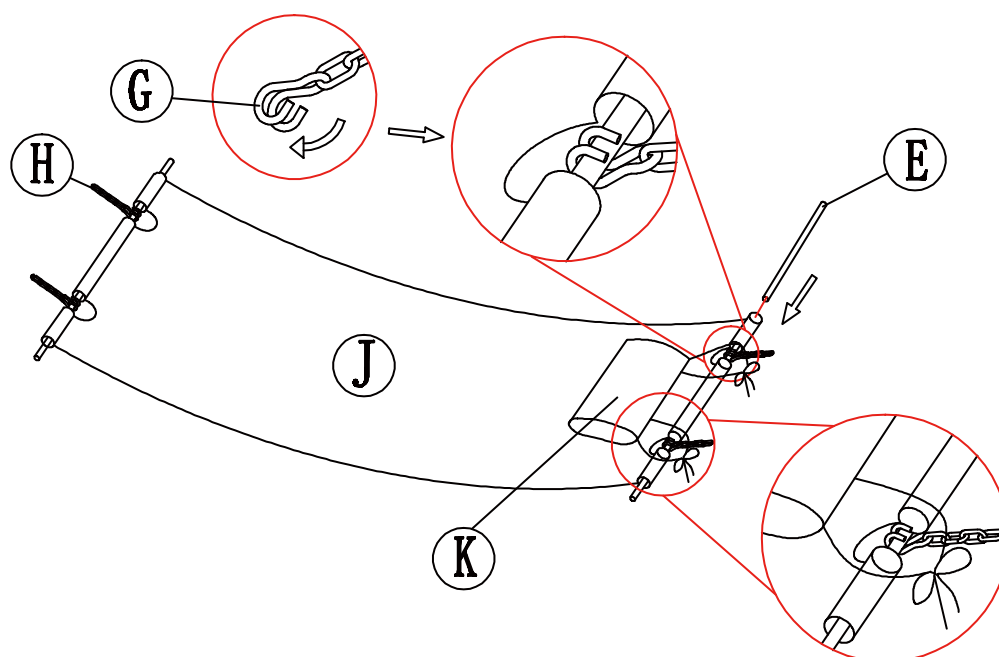


Step 5: Hang part H into the hook on main frame as shown in diagram.

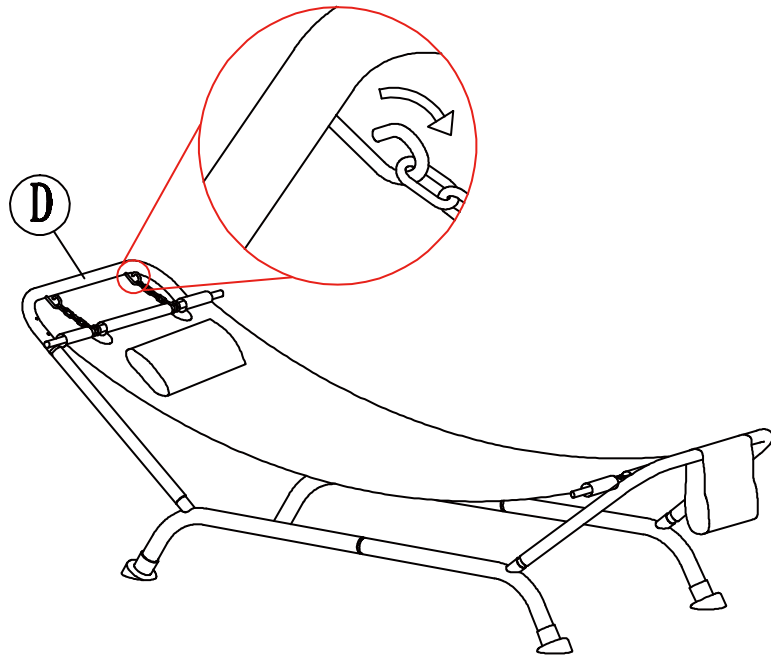


Step 6: Insert canopy roof part S into part T as shown in diagram.

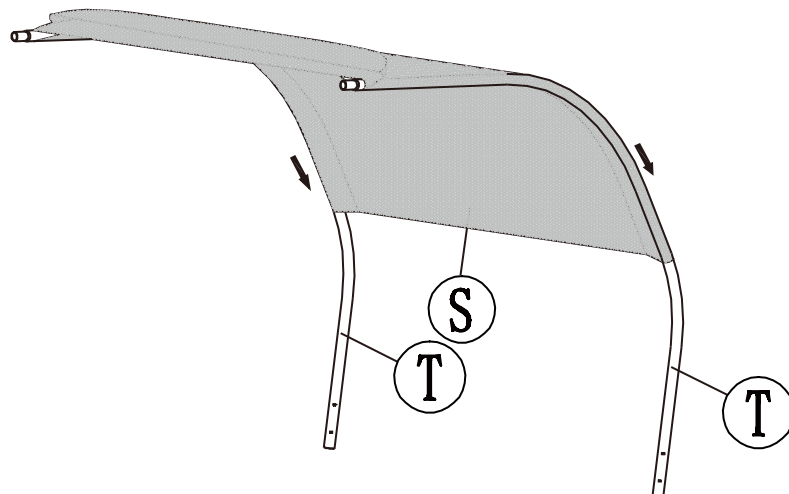

Step 7: Connect Part U to Part T to build roof frame as shown in the diagram.

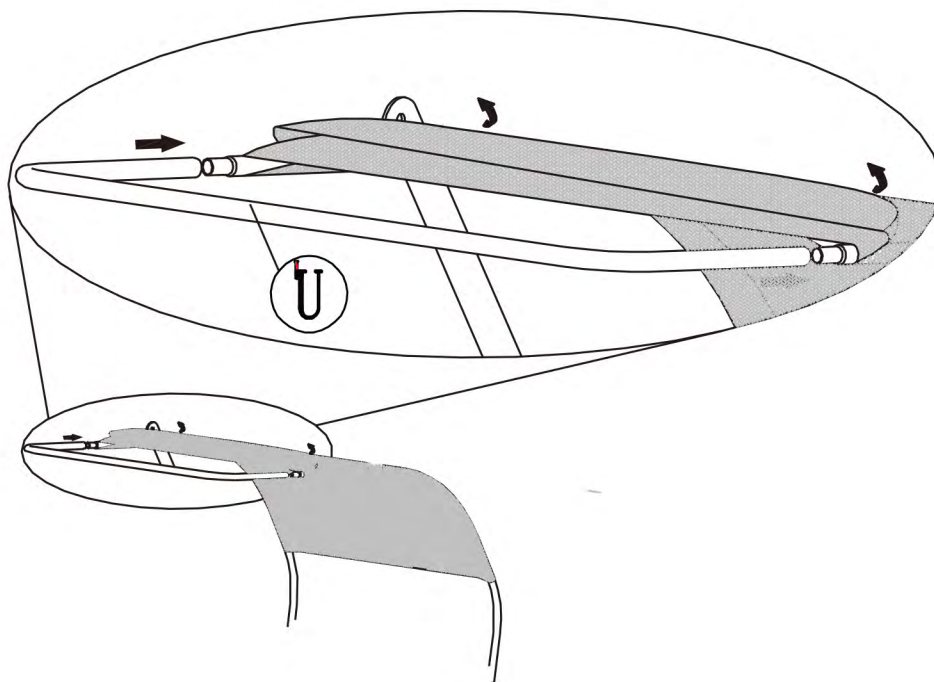

Step 8: Connect Part R to Part T using bolt Q as shown in diagram.
Affix roof canopy frame to main frame (Part D) using bolt N and bolt P as shown in the diagram.

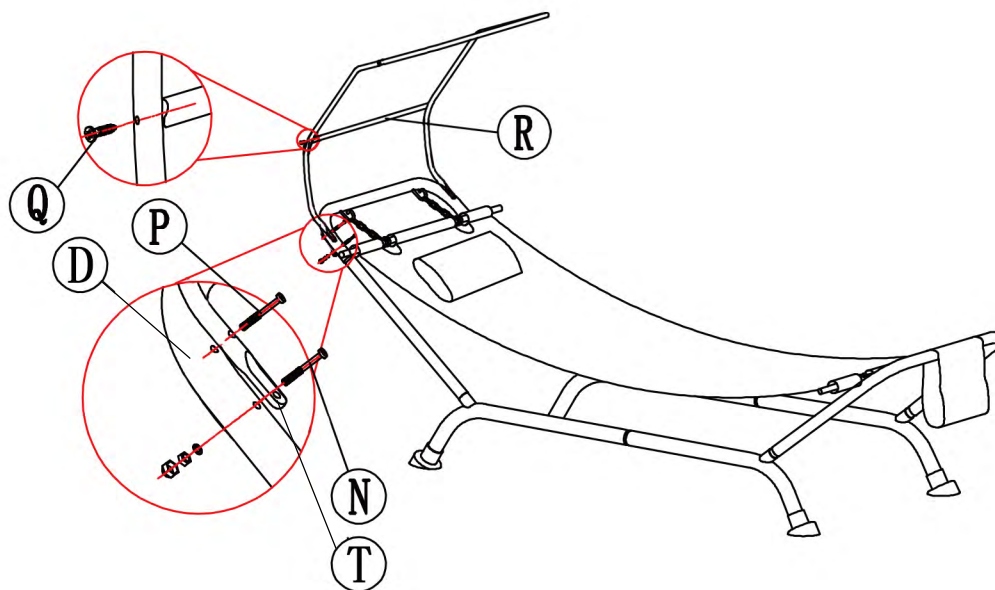

Step 9: Before using, make sure to check that all screws are securely tightened.

