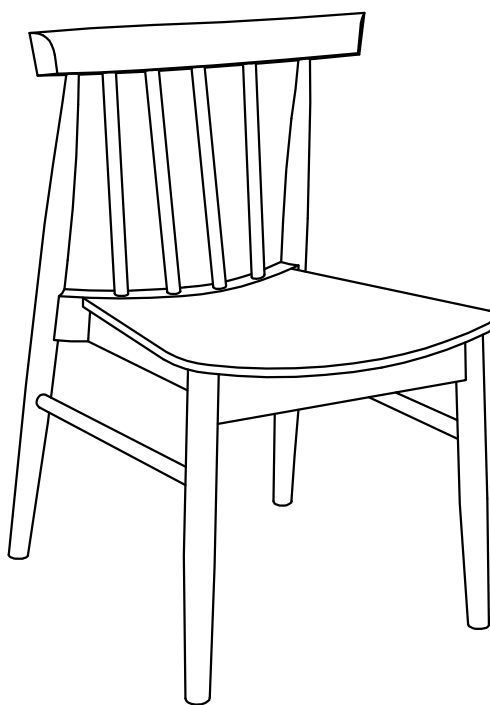










KJW.Y168 Assembly Manual

Dining Chair



CAUTION

THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.
PLEASE READ AND KEEP FOR FUTURE REFERENCE.


Ax1  Back Rest	Bx1  Front Leg	Cx1  Left Side Stretcher	Dx1  Right Side Stretcher
Ex2  Side Rail	Fx1  Seat Panel	Gx8  M6 x 50mm Bolt	Hx1  4# Allen wrench
Ix4  L-Bracket	Jx8  Short M4 x 12mm Screw	Kx4  Long M4 x 38mm Screw	Lx4  Ø22mm Felt Pad

Please read through the instructions below to familiarize yourself with the parts and steps before assembly.

Note: Do NOT use power tools for assembly.


- 1 Attach the Left Stretcher (C) and Right Stretcher (D) to the Back Rest (A), using the Bolts (G) pre-fitted with a Spring Washer and Flat Washer, along with an Allen Wrench (H).

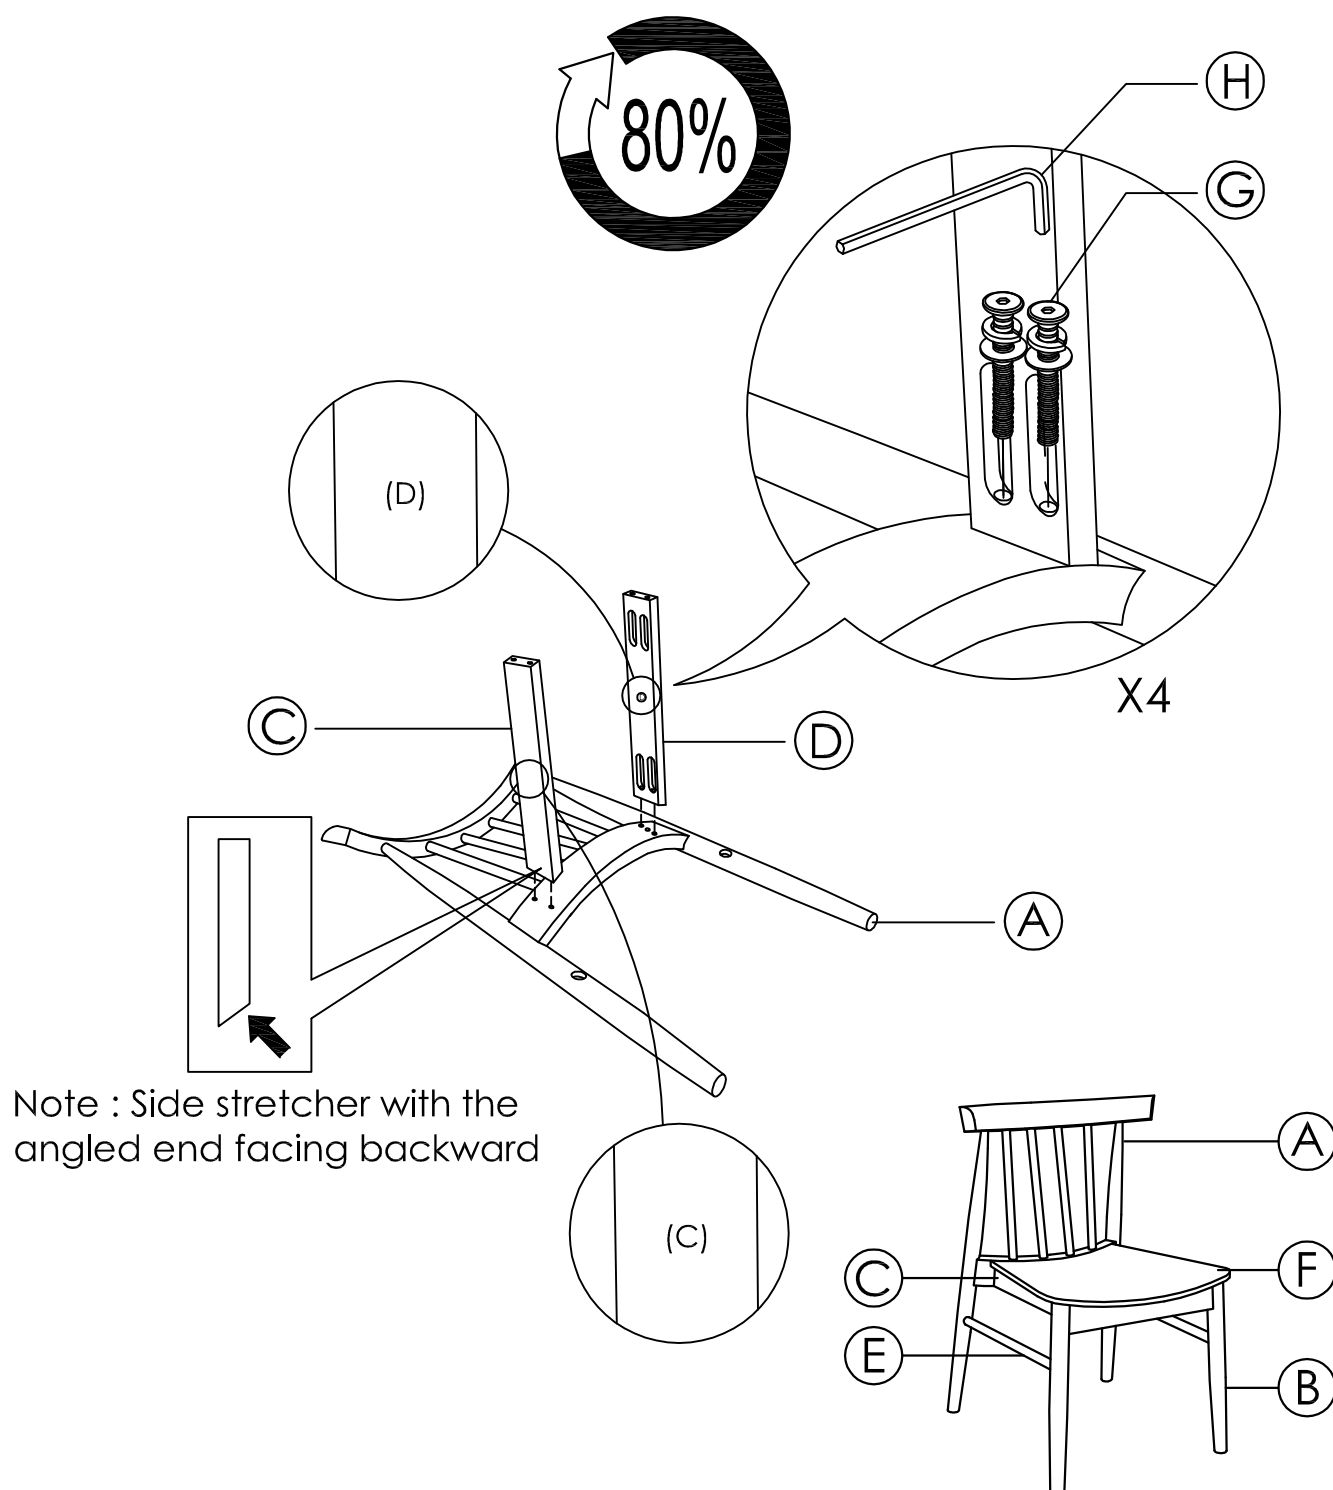Note the Side Stretcher with angle faces backward and fix to Back Rest (A). Do not fully tighten yet.





- 2** Attach the 2pcs Side Rail (E) and Front Leg (B) to the Back Rest (A), using the Bolts (G) pre-fitted with a Spring Washer and Flat Washer, along with an Allen Wrench (H). **Note the Side Rail (E) hole face downward as shown.**

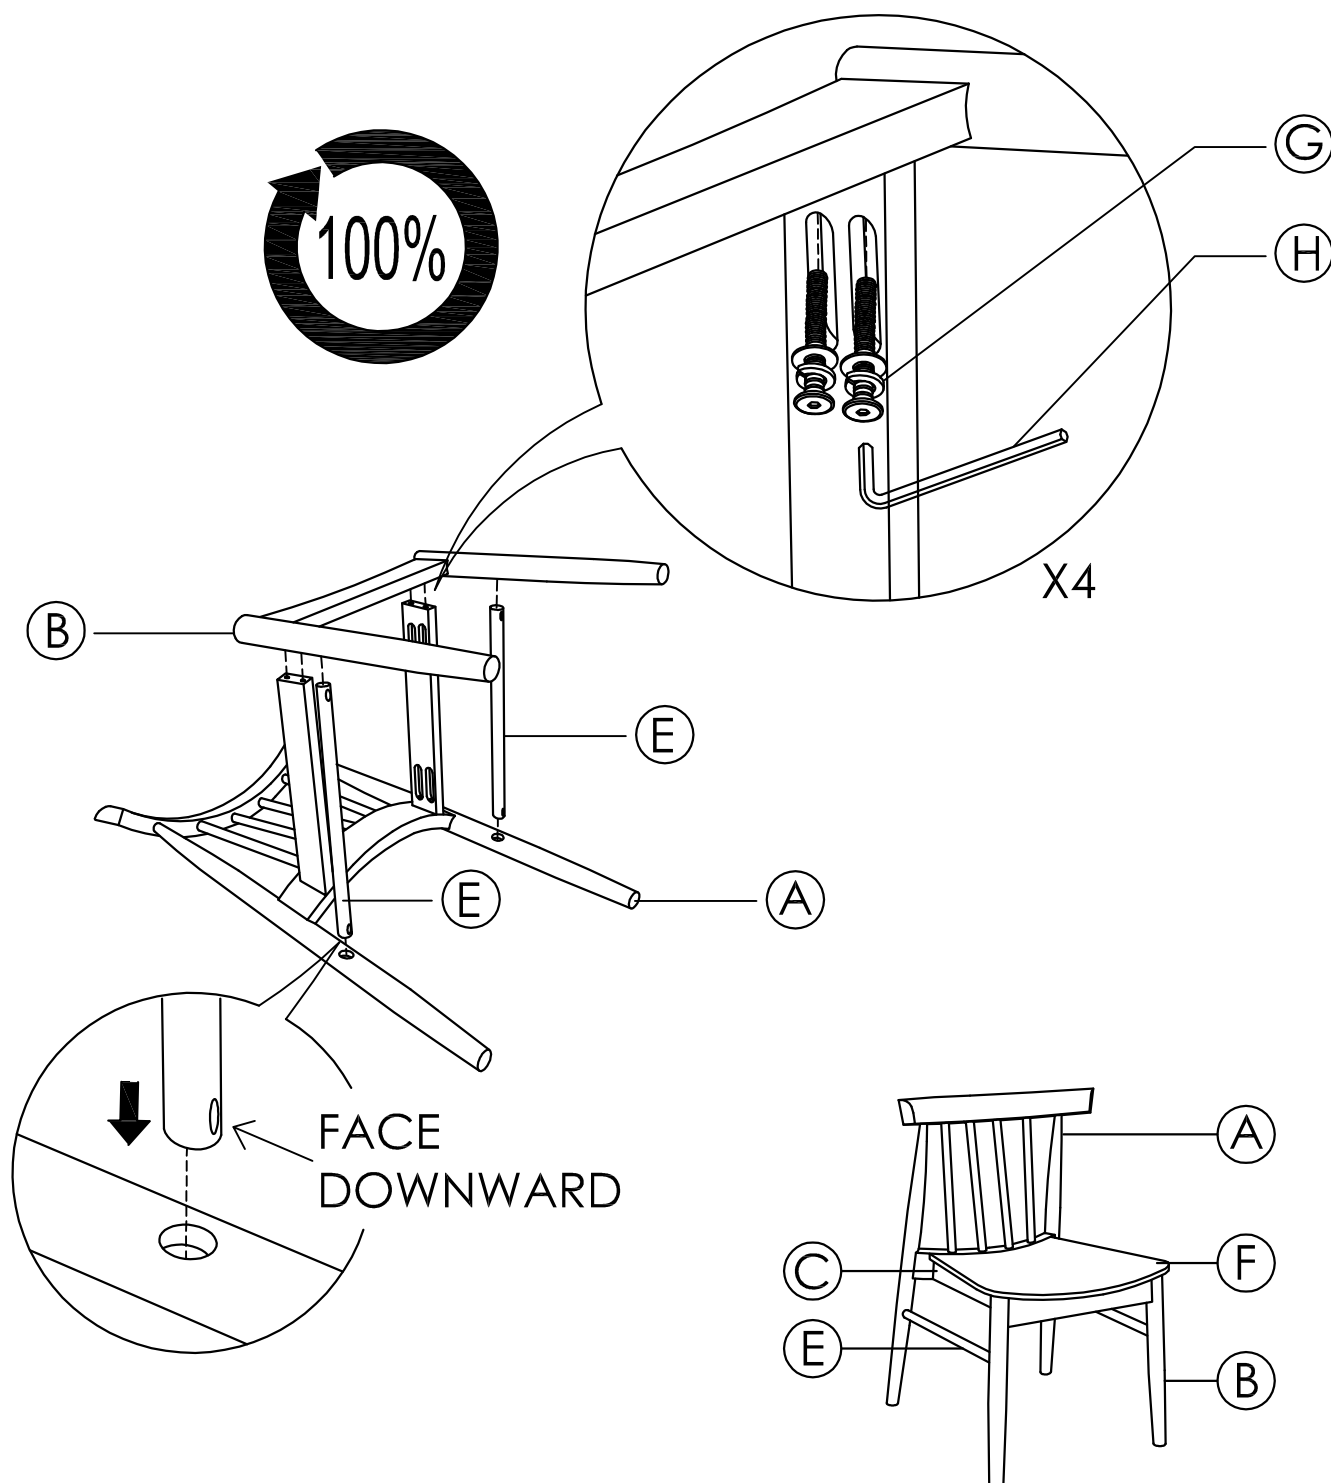Fully tighten all bolts from Step 1 to Step 2, but do not over-tighten.




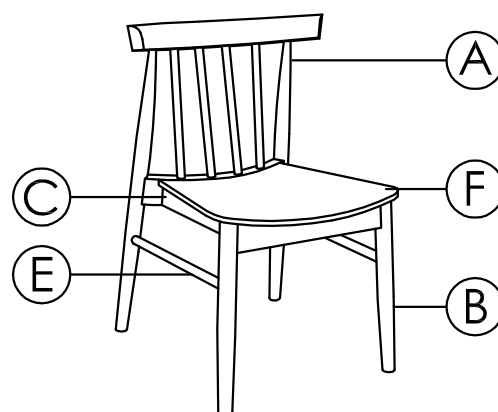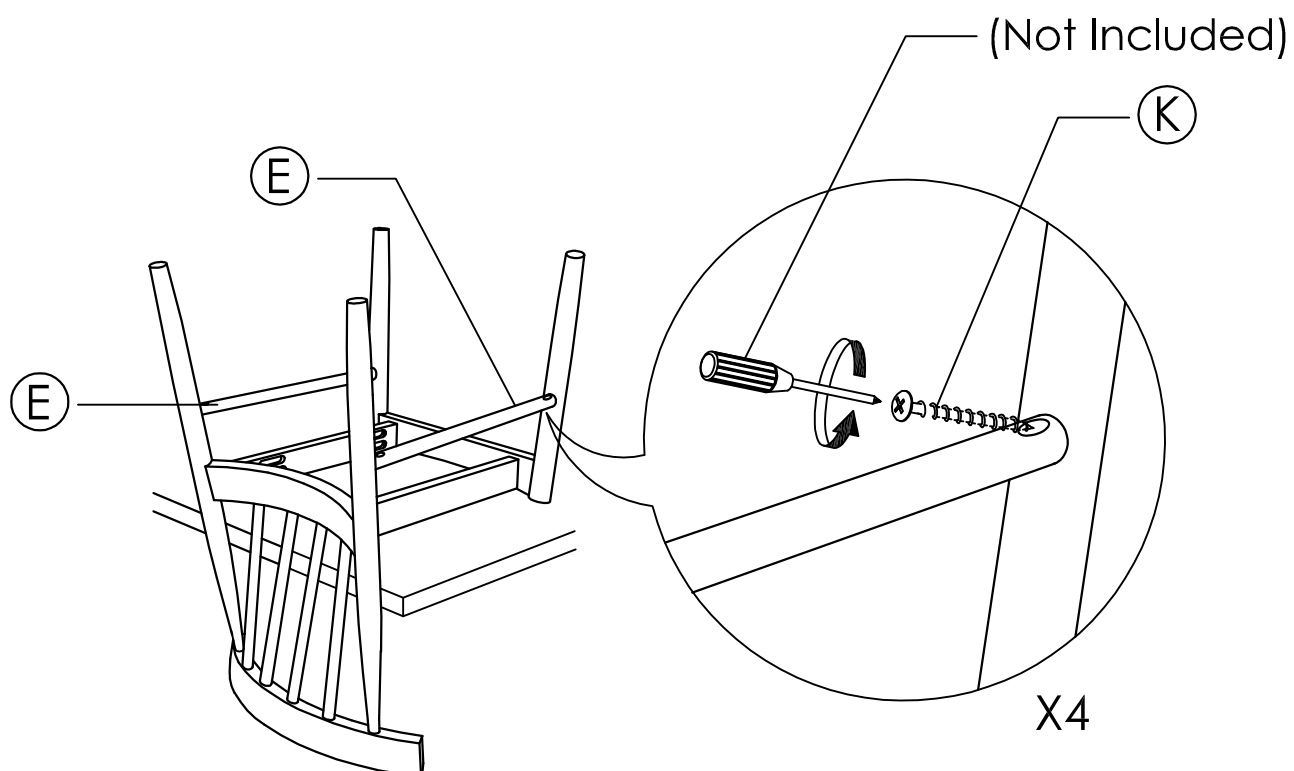- ③ Using Long Screws (K) with a screwdriver to fix Side Rail (E) to Back Rest (A) and Front Leg (B). **Fully tighten.**




- 4** Place the Seat Panel (F) onto the Chair Frame from Step 3, and using L-Brackets (I) and Short Screws (J) with a screwdriver. **Fully tighten.**

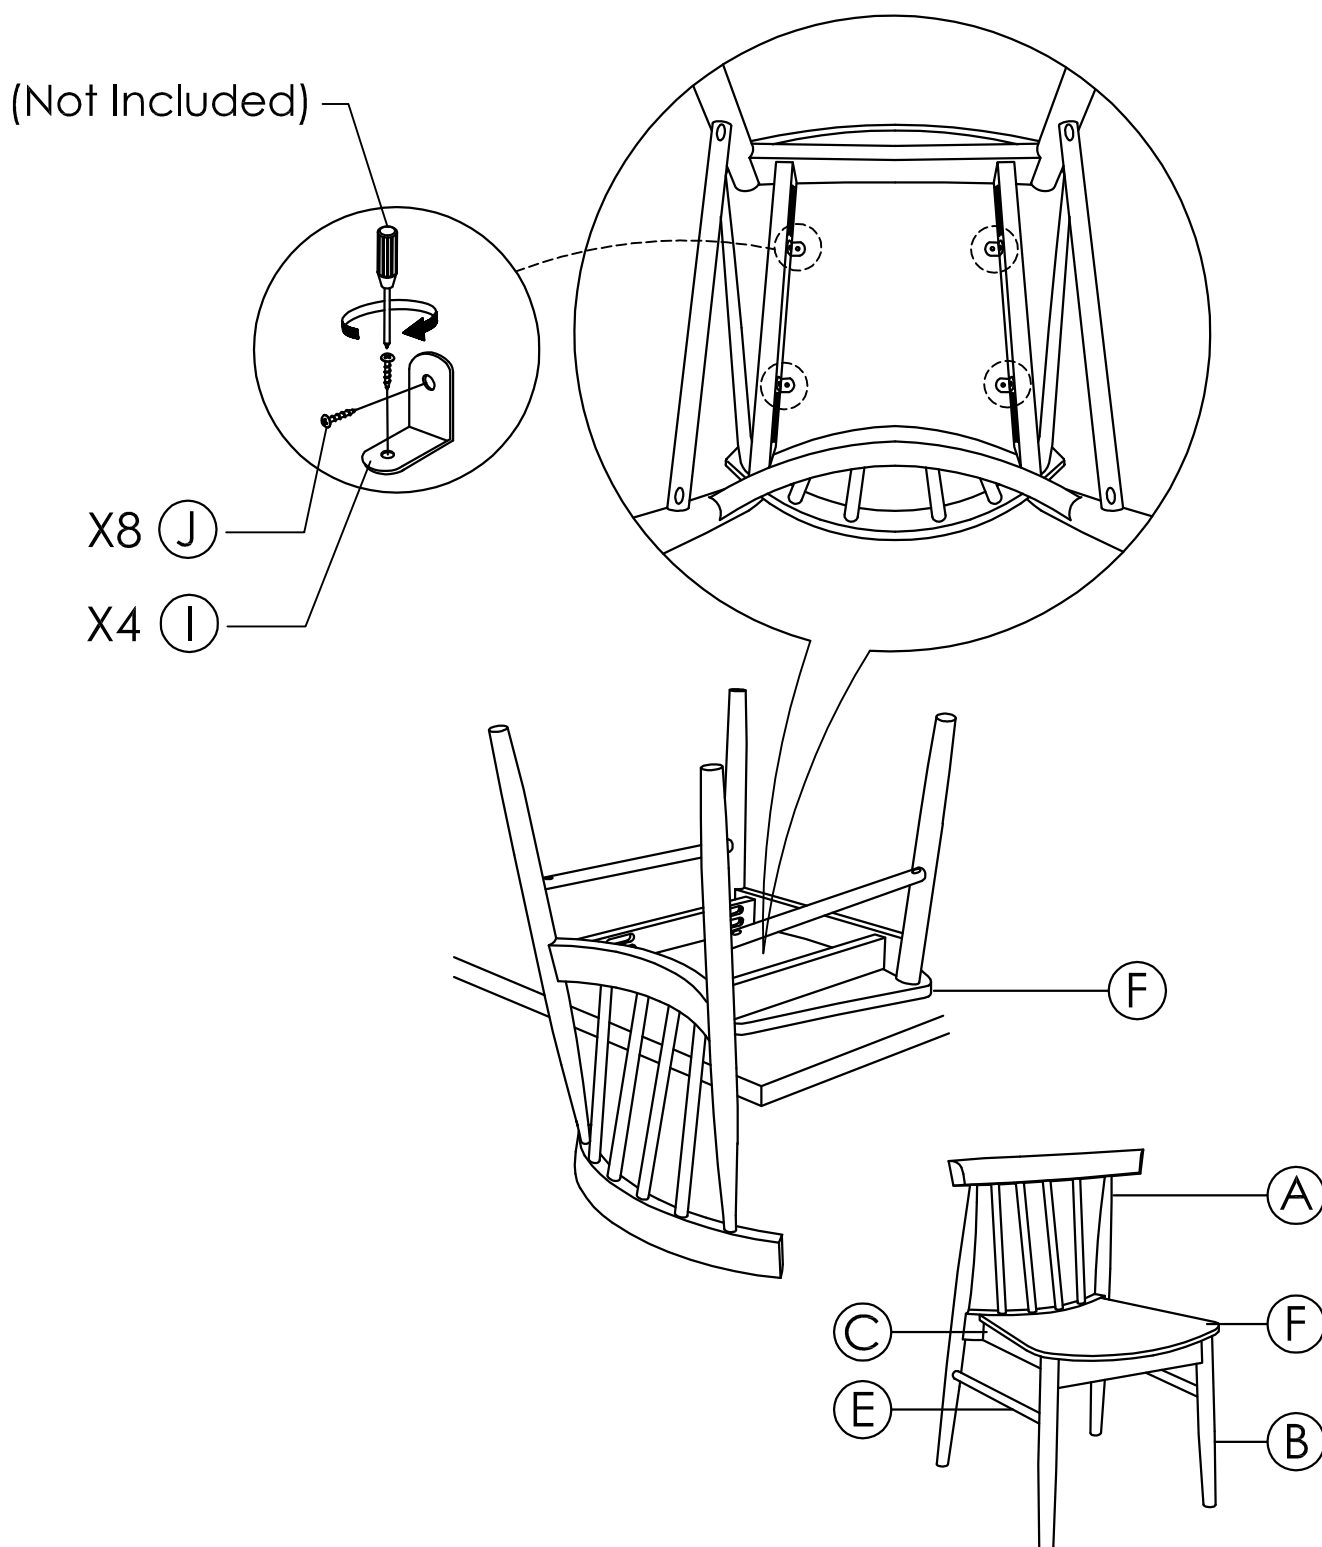Make sure there is no gap between the Seat Cushion (F) and the Back Rest (A) before positioning the L-Bracket (I).



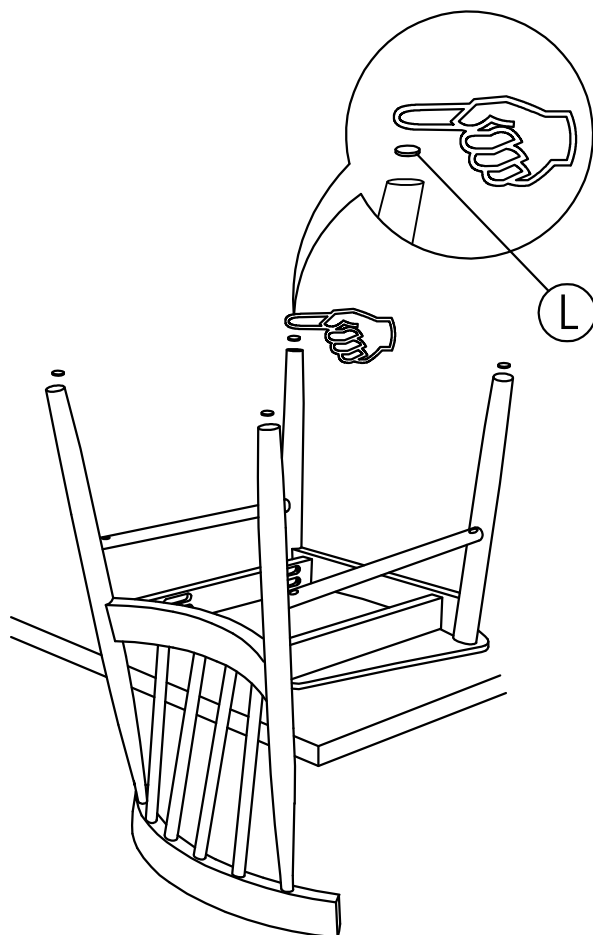- 5** Complimentary Felt Pads (L) are included to help protect your floor.



- 6** Assembly complete. Enjoy.

