

LED indoor light without sensor

RS 200 C

without motion detector, with Bluetooth
EAN 4007841 078775
Article number 078775



LED

long life LED 25.000 h



indoor light

3000 K

3000K warm-white



IP54



connectable via bluetooth



Settings via App



CE



Light source not exchangeable

Function description

The RS 200 C is the first STEINEL Connect LED indoor luminaire in our indoor range for ceilings and walls. This means that it can be conveniently set, networked and operated via Bluetooth. Without cables. Without stress. The luminaire comes in a high-quality, anthracite-coloured aluminium housing. So you automatically create an all-round beautiful room atmosphere, rounded off with an ambient light on the wall.

Technical specifications

With lamp	Yes, STEINEL LED system	Mounting height max.	4,00 m
With motion detector	No	HF-system	5,8 GHz
Manufacturer's Warranty	3 years	Transmitter power	< 1 mW
Settings via	Bluetooth, Smartphone, Tablet	Luminous flux total product	1165 lm
With remote control	No	Total product efficiency	68 lm/W
Version	without motion detector, with Bluetooth	Colour temperature	3000 K
PU1, EAN	4007841078775	Colour variation LED	SDCM3
Application, place	Indoors	Lamp	LED cannot be replaced
Application, room	stairwell, Indoors, function room / ancillary room, corridor / aisle, recreation room	LED cooling system	Passive Thermo Control
Colour	Anthracite	Soft light start	Yes
Installation site	ceiling	Twilight setting	2 – 2000 lx
Installation	Ceiling, Wall	Time setting	5 s – 60 Min.
Impact resistance	IK10	Basic light level function	Yes
IP-rating	IP54	Basic light level function, detail	LED effect light
Protection class	I	Basic light level function time	1-60 min
		Interconnection	Yes
		Type of interconnection	Master/master

<https://www.steinel.de>

Subject to technical modifications

09.2022 Page 1 from 2

LED indoor light without sensor

RS 200 C

without motion detector, with Bluetooth
EAN 4007841 078775
Article number 078775




Technical specifications

Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,5 W

Interconnection via	Bluetooth Mesh Connect
Basic light level function in per cent	10 – 100 %

Dimension Drawing

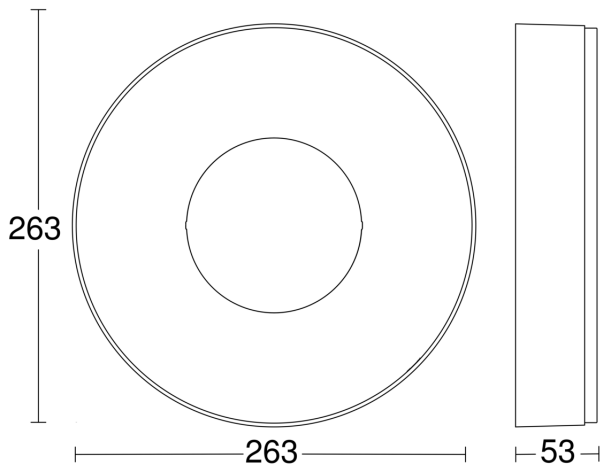

Slave/wireless master interconnection circuit diagram

