


Assembly Instructions

WI4825BK-C

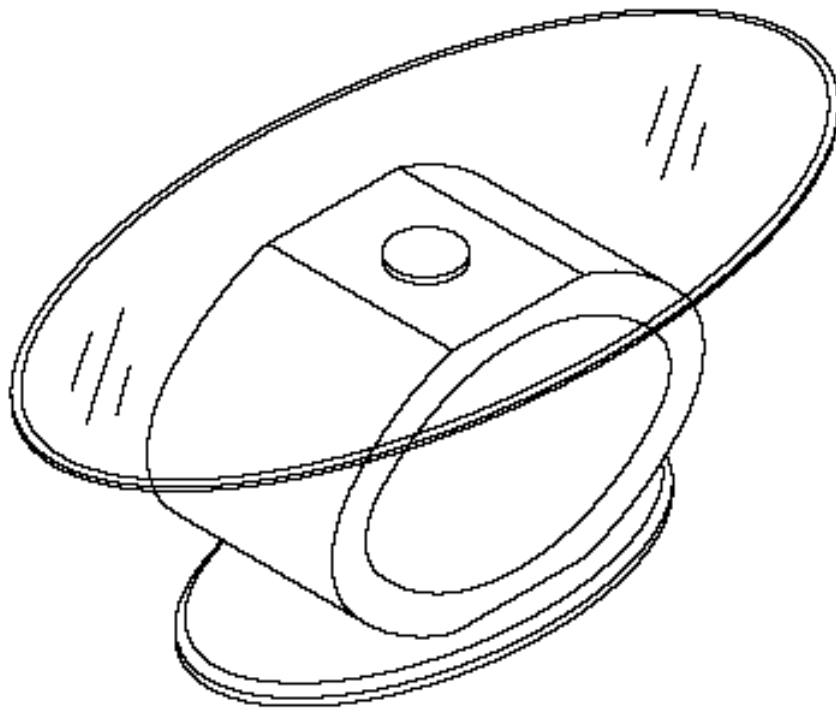

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT


Tools Required for Assembly:

Allen Wrench



(Included)

Hex Wrench



(Included)




2 PERSONS RECOMMENDED


ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

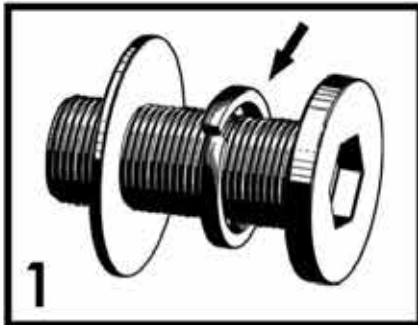


1 When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.

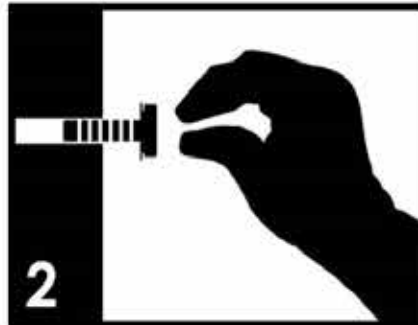


2 Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.




3 Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

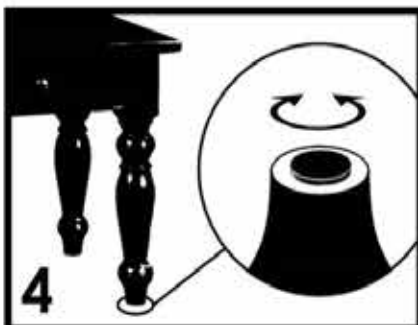

4 Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

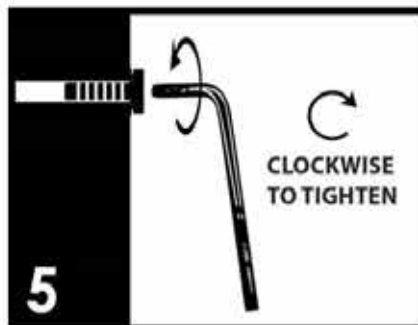

5 Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

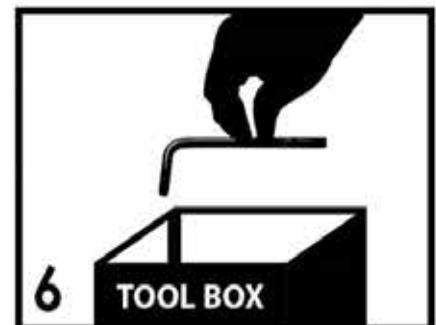

6 Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.






Before you begin, please read Page 2 of "Assembly and Care Advice".




And remember, do not tighten until each step is completed or instructed.

MD







Parts List

-  #1 x 1 pc
Glass Top
-  #2 x 1 pc
Pedestal
-  #3 x 1 pc
Base

Hardware List

-  #A x 4 pcs
Bolt 1/4"x1-1/2"
-  #B x 2 pcs
Threaded Stud
-  #C x 4 pcs
Small Flat Washer

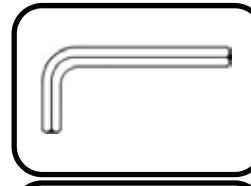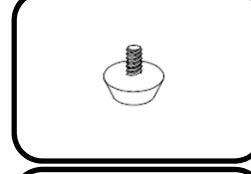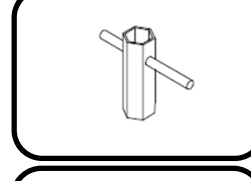Hardware List (Continued)


-  #D x 1 pc
Allen Wrench
-  #E x 6 pcs
Leveler
-  #F x 1 pc
Hex Wrench
-  #G x 2 pcs
Hex Nut
-  #H x 2 pcs
Large Flat Washer
-  #I x 2 pcs
Cover

Due to the size and/or weight of this product, it is highly recommended that the assembly should be done near the area of its intended location. Make sure you have enough space to move around during the assembly. ALWAYS have at least two people to help with transporting and assembling the product to avoid any potential injury and/or damage.




- I. Carefully place the glass top (#1) facing down on a protected surface. Insert the 2 threaded studs (#B) into the pre-drilled holes on the center of the glass top (#1).
- II. Place the pedestal (#2) over the 2 threaded studs (#B). Then place 2 large flat washers (#H) over the 2 threaded studs (#B).
- III. Secure the 2 hex nuts (#G) onto the same threaded studs using the hex wrench (#F) to tighten the parts together.

#B x 2 pcs
#G x 2 pcs
#H x 2 pcs

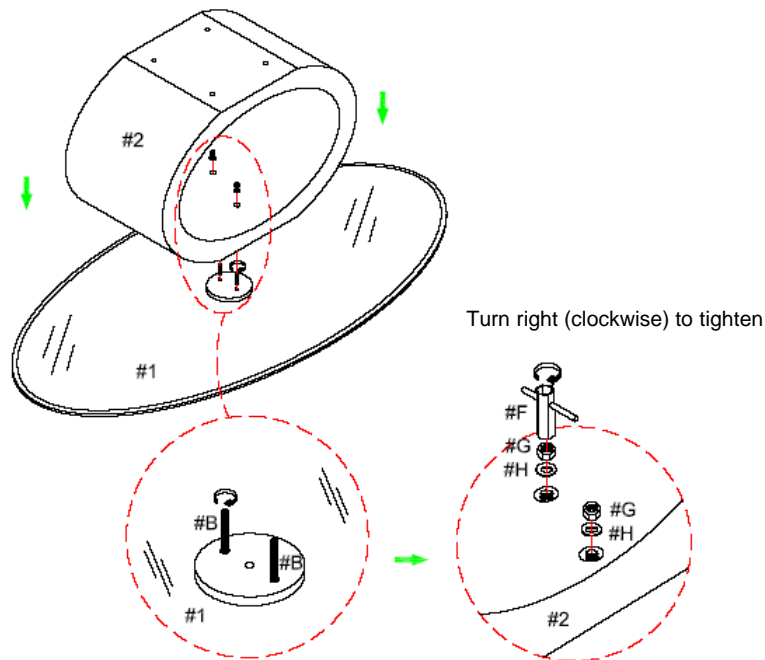

#A x 4 pcs
#C x 4 pcs
#E x 6 pcs

- I. Align the base (#3) with the pre-drilled holes on the other side of the pedestal (#2).
- II. Prepare 4 bolt assemblies by inserting the small flat washer (#C) onto the bolt (#A).
- III. Insert the bolt assemblies through pre-drilled holes of the base (#3) using the Allen wrench (#D) to lock them with the pedestal (#2).
- IV. Align the threaded ends of the 6 levelers (#E) with the pre-drilled holes on the base (#3) and tighten by hand until secured.

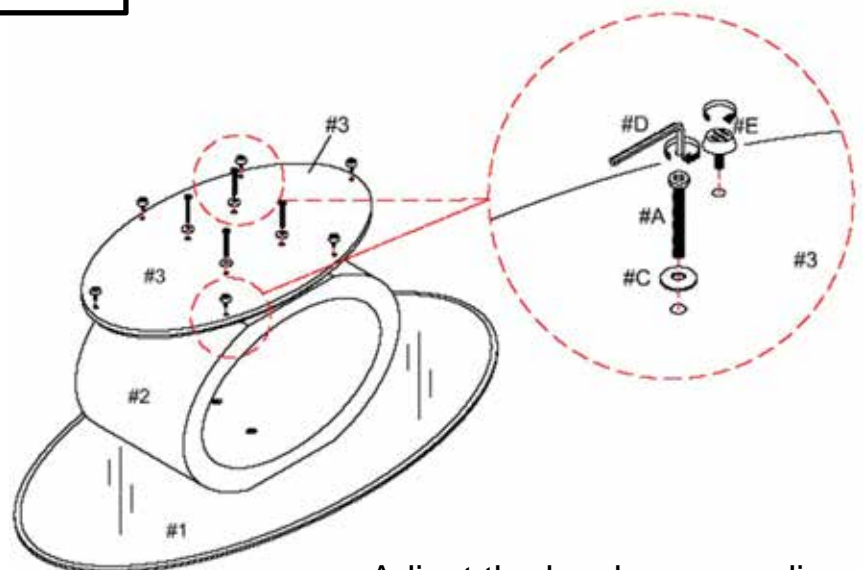


Adjust the levelers according to the ground level on Step 4.




Insert the 2 covers (#I) over the 2 hex nuts (#G) secured to the pedestal (#2).

#I x 2 pcs

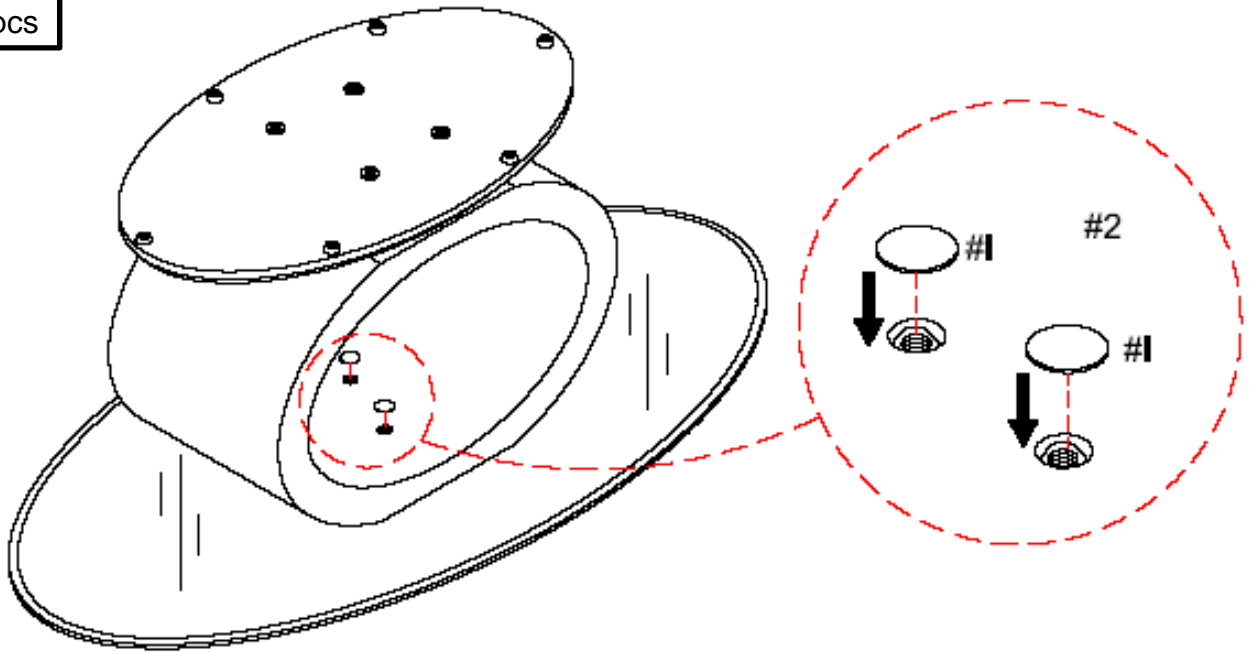

- I. Carefully place the table in its upright position. Make sure the table is rested on a flat surface and does not feel loose or wobbly. If it does, double check that the bolts/screws are secured and properly tightened.
- II. If necessary, adjust the levelers (#E) according to the ground level. To lower or to raise the levelers (#E), turn the levelers clockwise or counterclockwise, respectively.

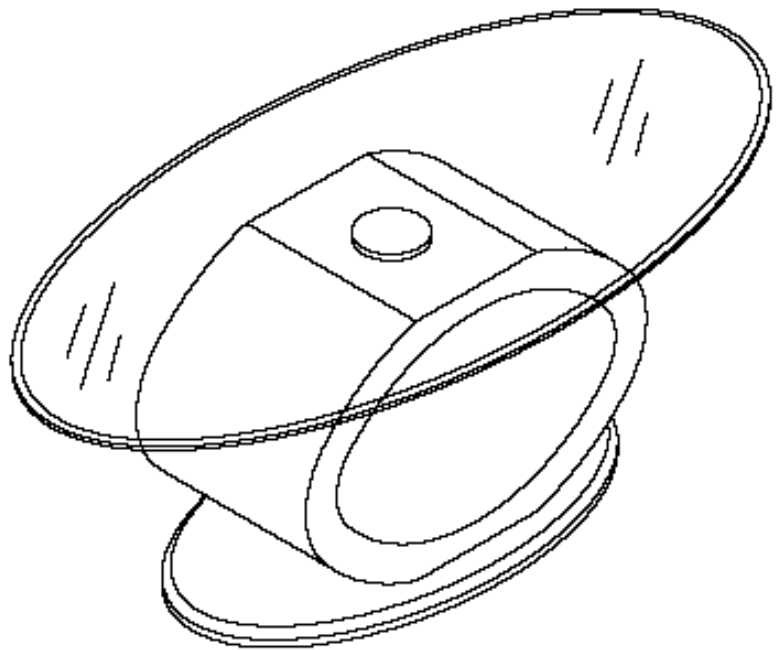

ASSEMBLY IS COMPLETED