

Ceiling Fan

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Product Information

Blade Finish	Matte White/Matte White
--------------	-------------------------

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	127	6479	96	.55	67
Med	100	4754	124	.44	38
High	60	2659	187	.27	14

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	14 Degrees
Blade Sweep	60"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	188MM X 25MM
Motor Type	AC


Safety Listings & Certifications

Safety Rated	Dry
Energy Star	Yes
Warranty	

Installation

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical junction boxes marked "For Fan Support"
Electrical Requirements	120V 60Hz AC

Dimensions

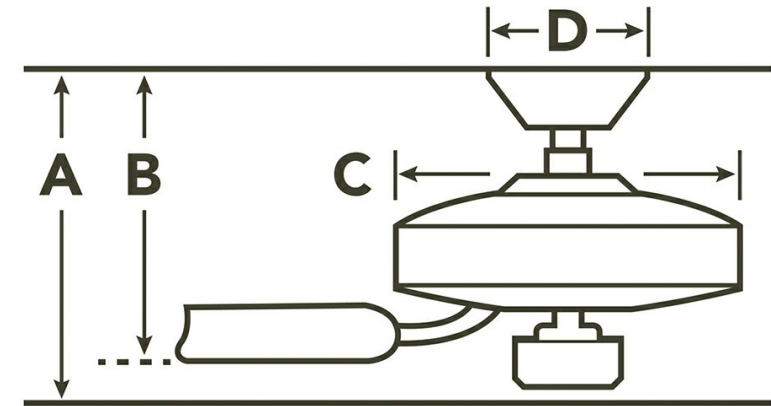

Downrod	A	B	C	D
1.00 OD X 4.50	13.75	11.00	8.00	5.90

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
Matte White			MATTE WHITE	MATTE WHITE

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Brushed Nickel			SILVER	WALNUT
Olde Bronze			WALNUT	CHERRY

Minimum Distance Between
Bottom Of Fan Blade To Floor 7.5 feet

Control Options

Product ID	Descr
	Universal Remote Control
	4 Speed Fan Slide Control
	4 Speed Fan Slide Control
	4 Speed Fan Slide Control
	Limited Function Cooltouch
	Wall Control System L-Function
	4 Speed Rotary Switch 10 AMP

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.