


Assembly Instruction

WARNING! PLEASE PLACE ALL THE PRODUCTS AT ROOM TEMPERATURE. DO NOT STORE BIDETS AND ITS ACCESSORIES IN FREEZING TEMPERATURE ENVIRONMENT BELOW 32 DEGREE FARENHEIT.

1.NAMES AND FUNCTIONS OF ACCESSORIES

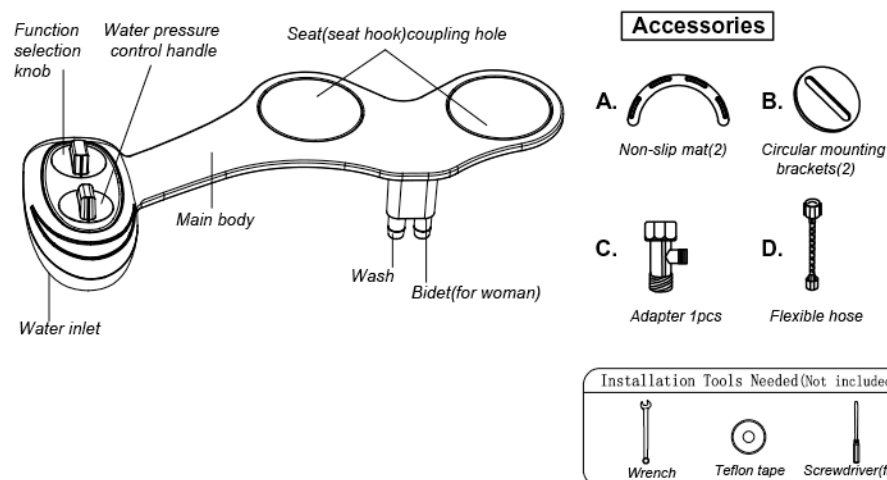

2.INSTALLATION

PREPARATION


- 1.Remove the existing toilet seat .
- 2.Turn off the water valve.

3.Flush toilet to drain tank completely.


4.Disconnect exiting water pipe

5. Attach adapter to the water valve pipe and exiting water pipe,use teflon tape.

Installation

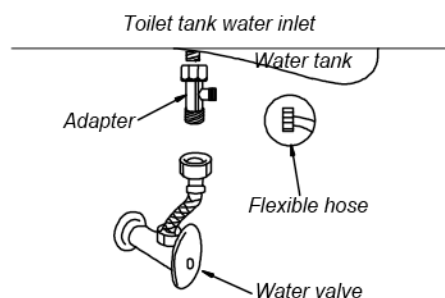


3. INSERT THE RUBBER NON-SLIP MATS TO THE BOTTOM OF THE BIDET AND PLACE THE CIRCULAR MOUNTING BRACKETS INTO THE BIDET ATTACHMENT

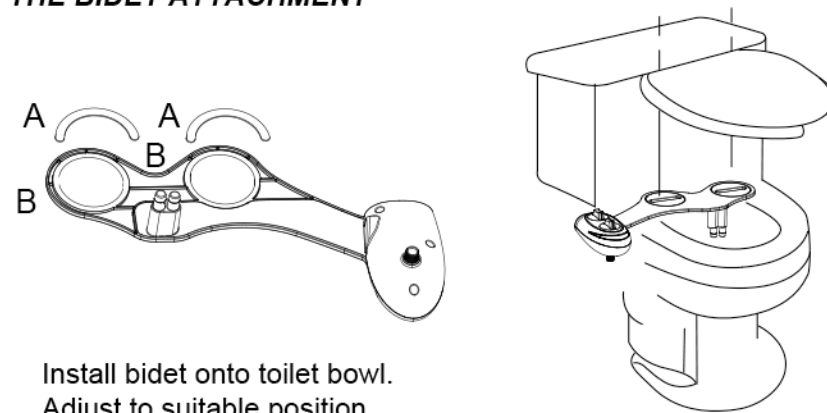

4.FINAL ASSEMBLED FIGURE

Attach flexible hose to the adapter and bidet
Turn on water valve to use.

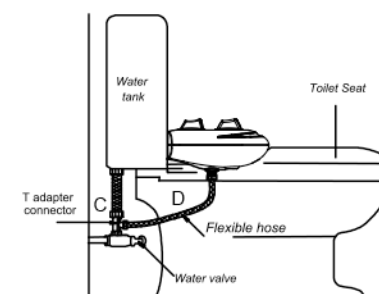


TRYING FOR THE FIRST TIME

Congratulations! You are ready to use for the first time.
Adjust the function selection and water pressure control knob, choose the comfortable pressure you want.
Note: function selection and water pressure control knob doesn't reset automatically, please turn it off manually.

TROUBLE SHOOTING

Twin Nozzle system



If your spray outlet hole is clogged for some reason, simply move spray outlet up and down few times manually.



HELPFUL TIP:

Over tightening can cause damage to the threads and result in water leakage.
Use only hand pressure first and check for any leakage.
Turn only less than quarter turn at a time making sure there is no leakage.