








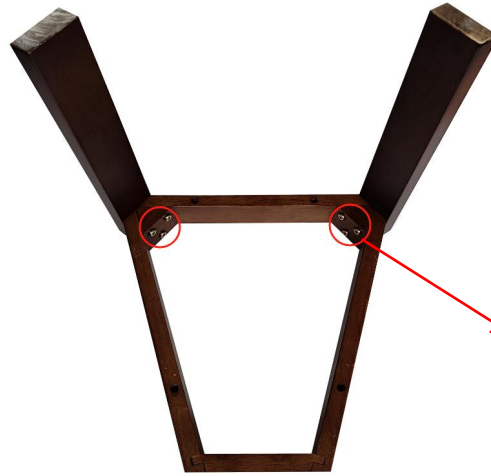
Installation

Hardware List		Hardware List	
	1 Seat		1 Frame
	4 8x35mm screws and Washers		6 8x60mm screws and Washers
	4 6x70mm screws and Washers		1 Hexagonal screw tap
	4 Foot pads and 4x10mm Self-tapping screws		

1





Note that all screw holes can be aligned before tightening the screws.




8x60mm screw




2

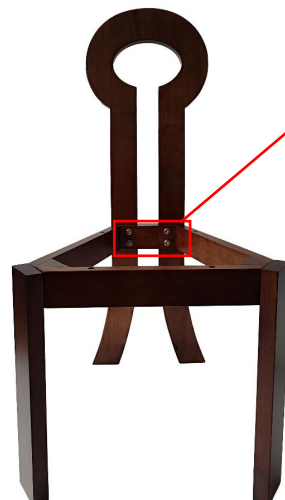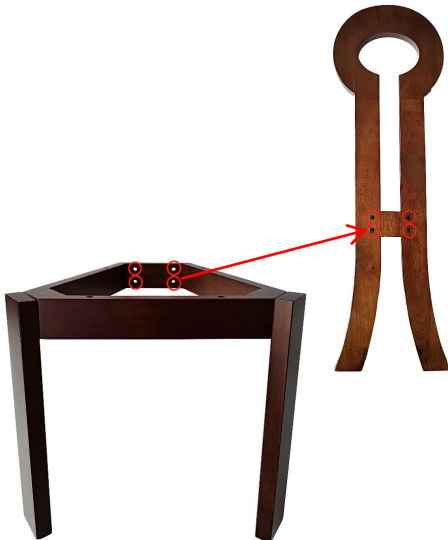


8x35mm screw

3

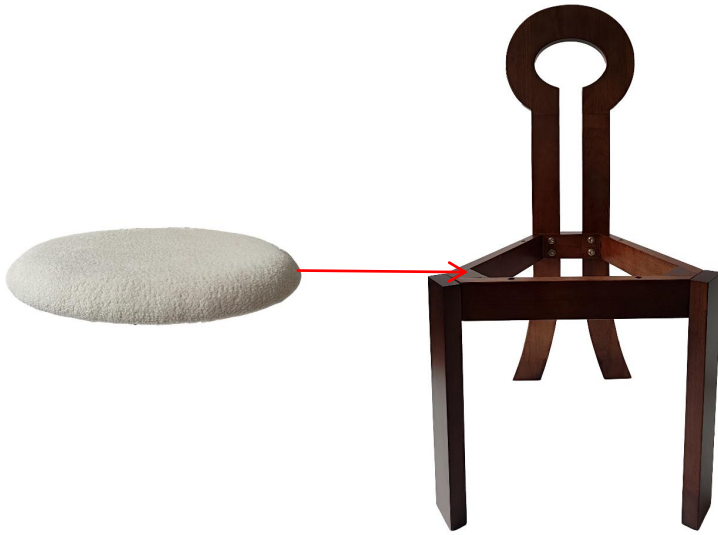


4



Installation



Hardware List		Hardware List	
 Table top	1	 Table leg	1
 Decorative ring	1	 8x16mm screws and washers	4
 8x45mm screws and nuts	4	 spare 4x15mm Self-tapping screws	8
 Hexagonal screw tap	1		

1

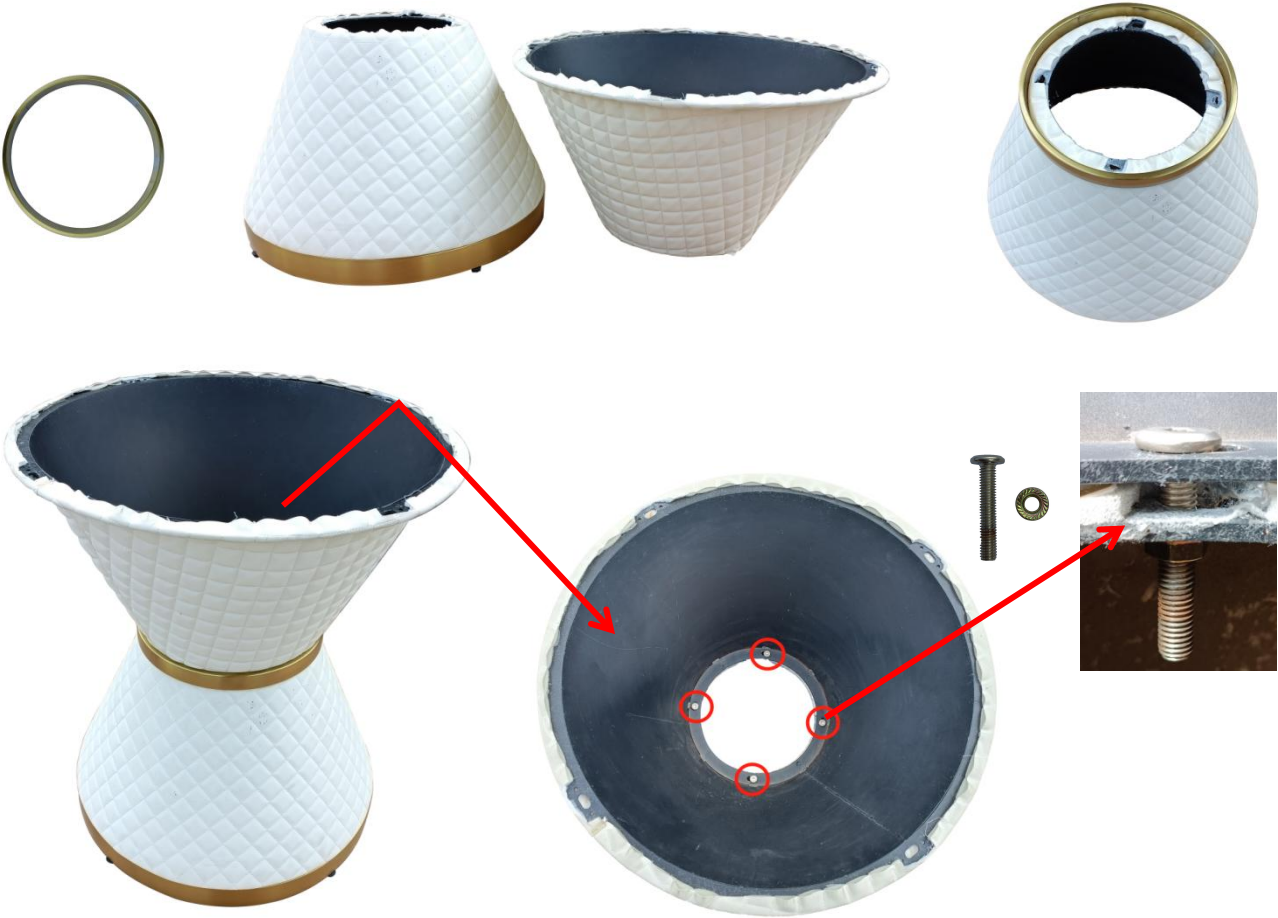

Place it as shown in figure 1, align the screw holes with 8x45mm screws and nuts and fasten them.

2

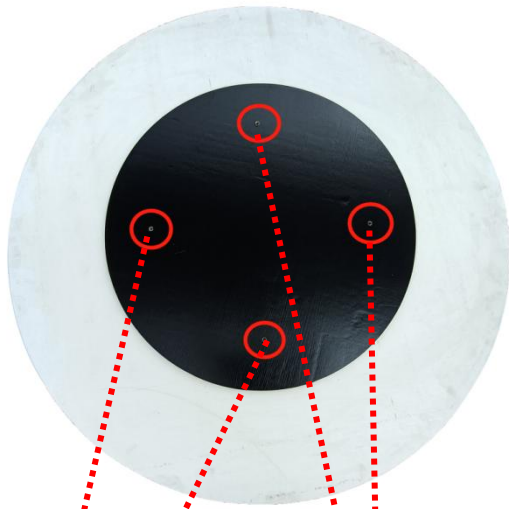

8x16mm screw
and washer



This is a spare screw hole. When the 8x16mm screw fails to be screwed in, the hole can be fixed with a 4x15mm self-tapping screw. Either way will do.



Adjustable foot pads at the bottom of the support legs (when the ground is uneven, the foot pads can be used to adjust the balance)

Put the table top on the table leg, make sure the reserved screw holes of the table top and the frame are corresponding, tighten 8x16mm screws from the bottom to finish the installation.

