




97052 Product Installation Instructions

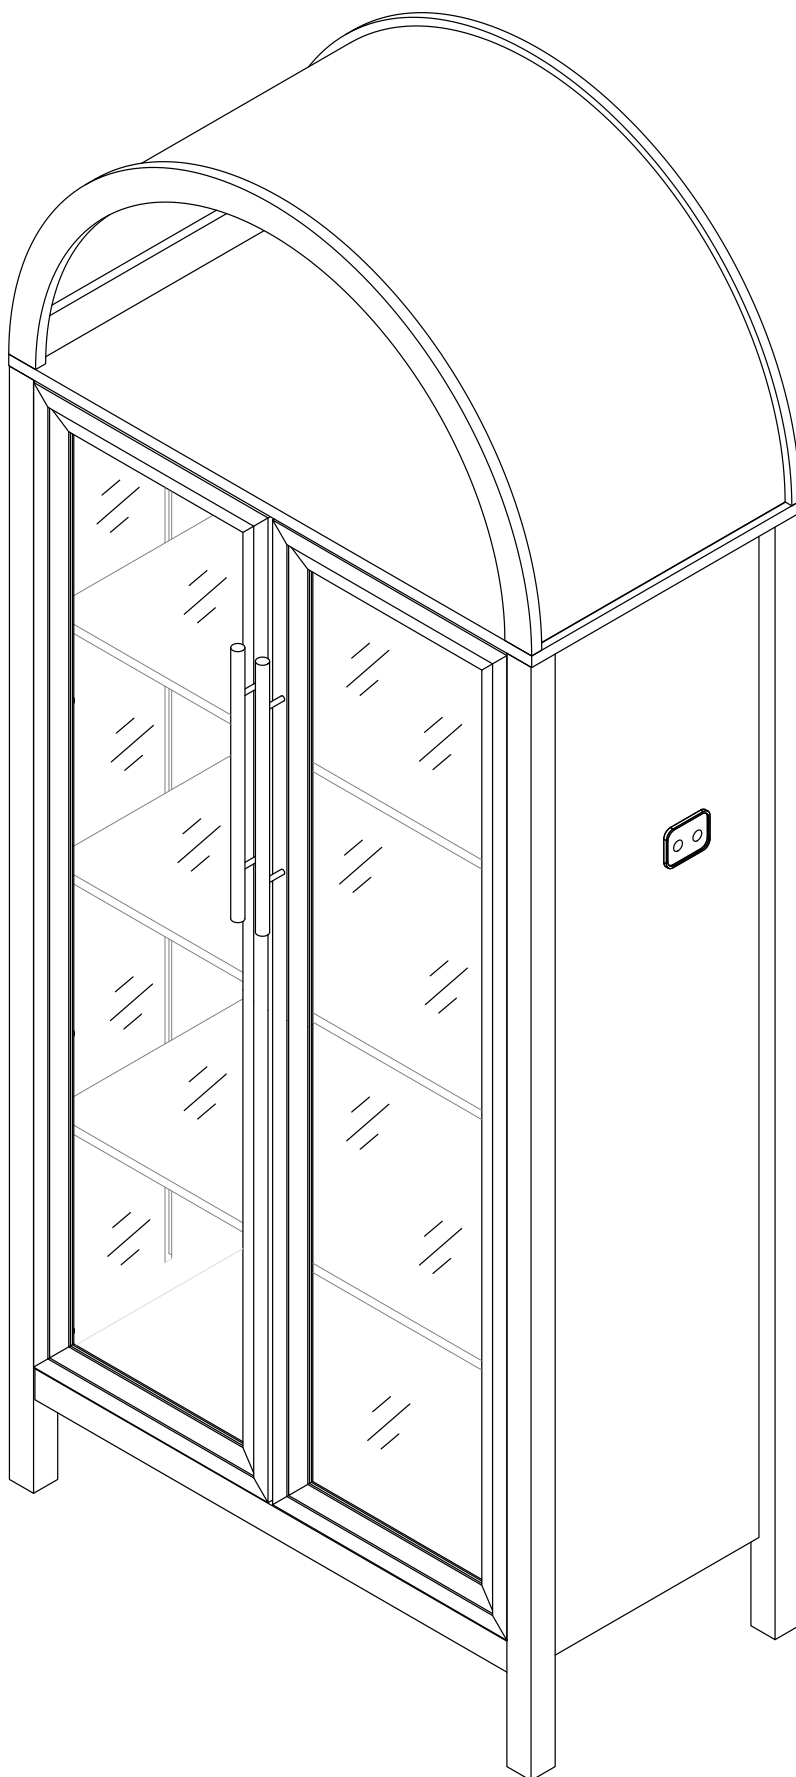




A x1



B x1




C x1



D x1



E x1




F x1




G x1




H x1




I x3




J x2




J1 x1




J2 x1




K x1




L x2




M x1



N x1

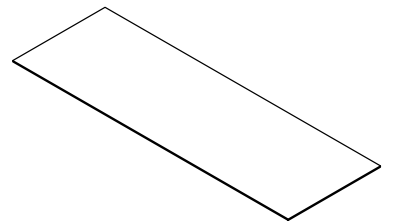


O x1

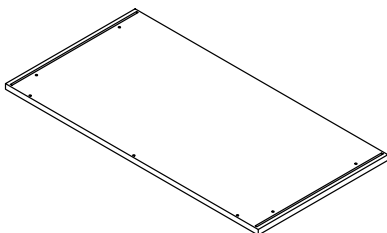


P x1



Q x1














R x1




1

Accessories list

①		Two In One Screw (6x28mm)	58pcs +4pcs
②		Two In One Nut (10x12mm)	58pcs +4pcs
③		Wood Chipping (6x30mm)	20pcs +2pcs
④		Non-slip pads (35x35x2mm)	4pcs +2pcs
⑤		Magnetic Attraction & Screw (3x12mm)	4pcs +1pcs 2pcs
⑥		Sticker (L=371mm Ø20mm)	4pcs +2pcs 1pcs
⑦		Wire	1pcs
⑧		Hinge & Screw (3.5x12mm)	36pcs +4pcs 6pcs
⑨		Handle & screw (4x22mm)	4pcs +2pcs 2pcs
⑩		Fixing clip & screw (3x16mm)	8pcs +2pcs
⑪		Forked line	1pcs
⑫		anti-tipping tape	1pcs
		Screw & gasket (3.5x12mm)	1pcs 2pcs
		Screw (4x45mm)	1pcs 1pcs
⑬		Magnetic Attraction & Screw (3x12mm)	4pcs 4pcs +2pcs
⑭		Wire Clamp	3pcs +1pcs
⑮		Foot nail	6pcs +2pcs
		AC/DC Adapter(12V 2.0A)	1pcs




1pcs




Double-head screwdriver, use as required

2

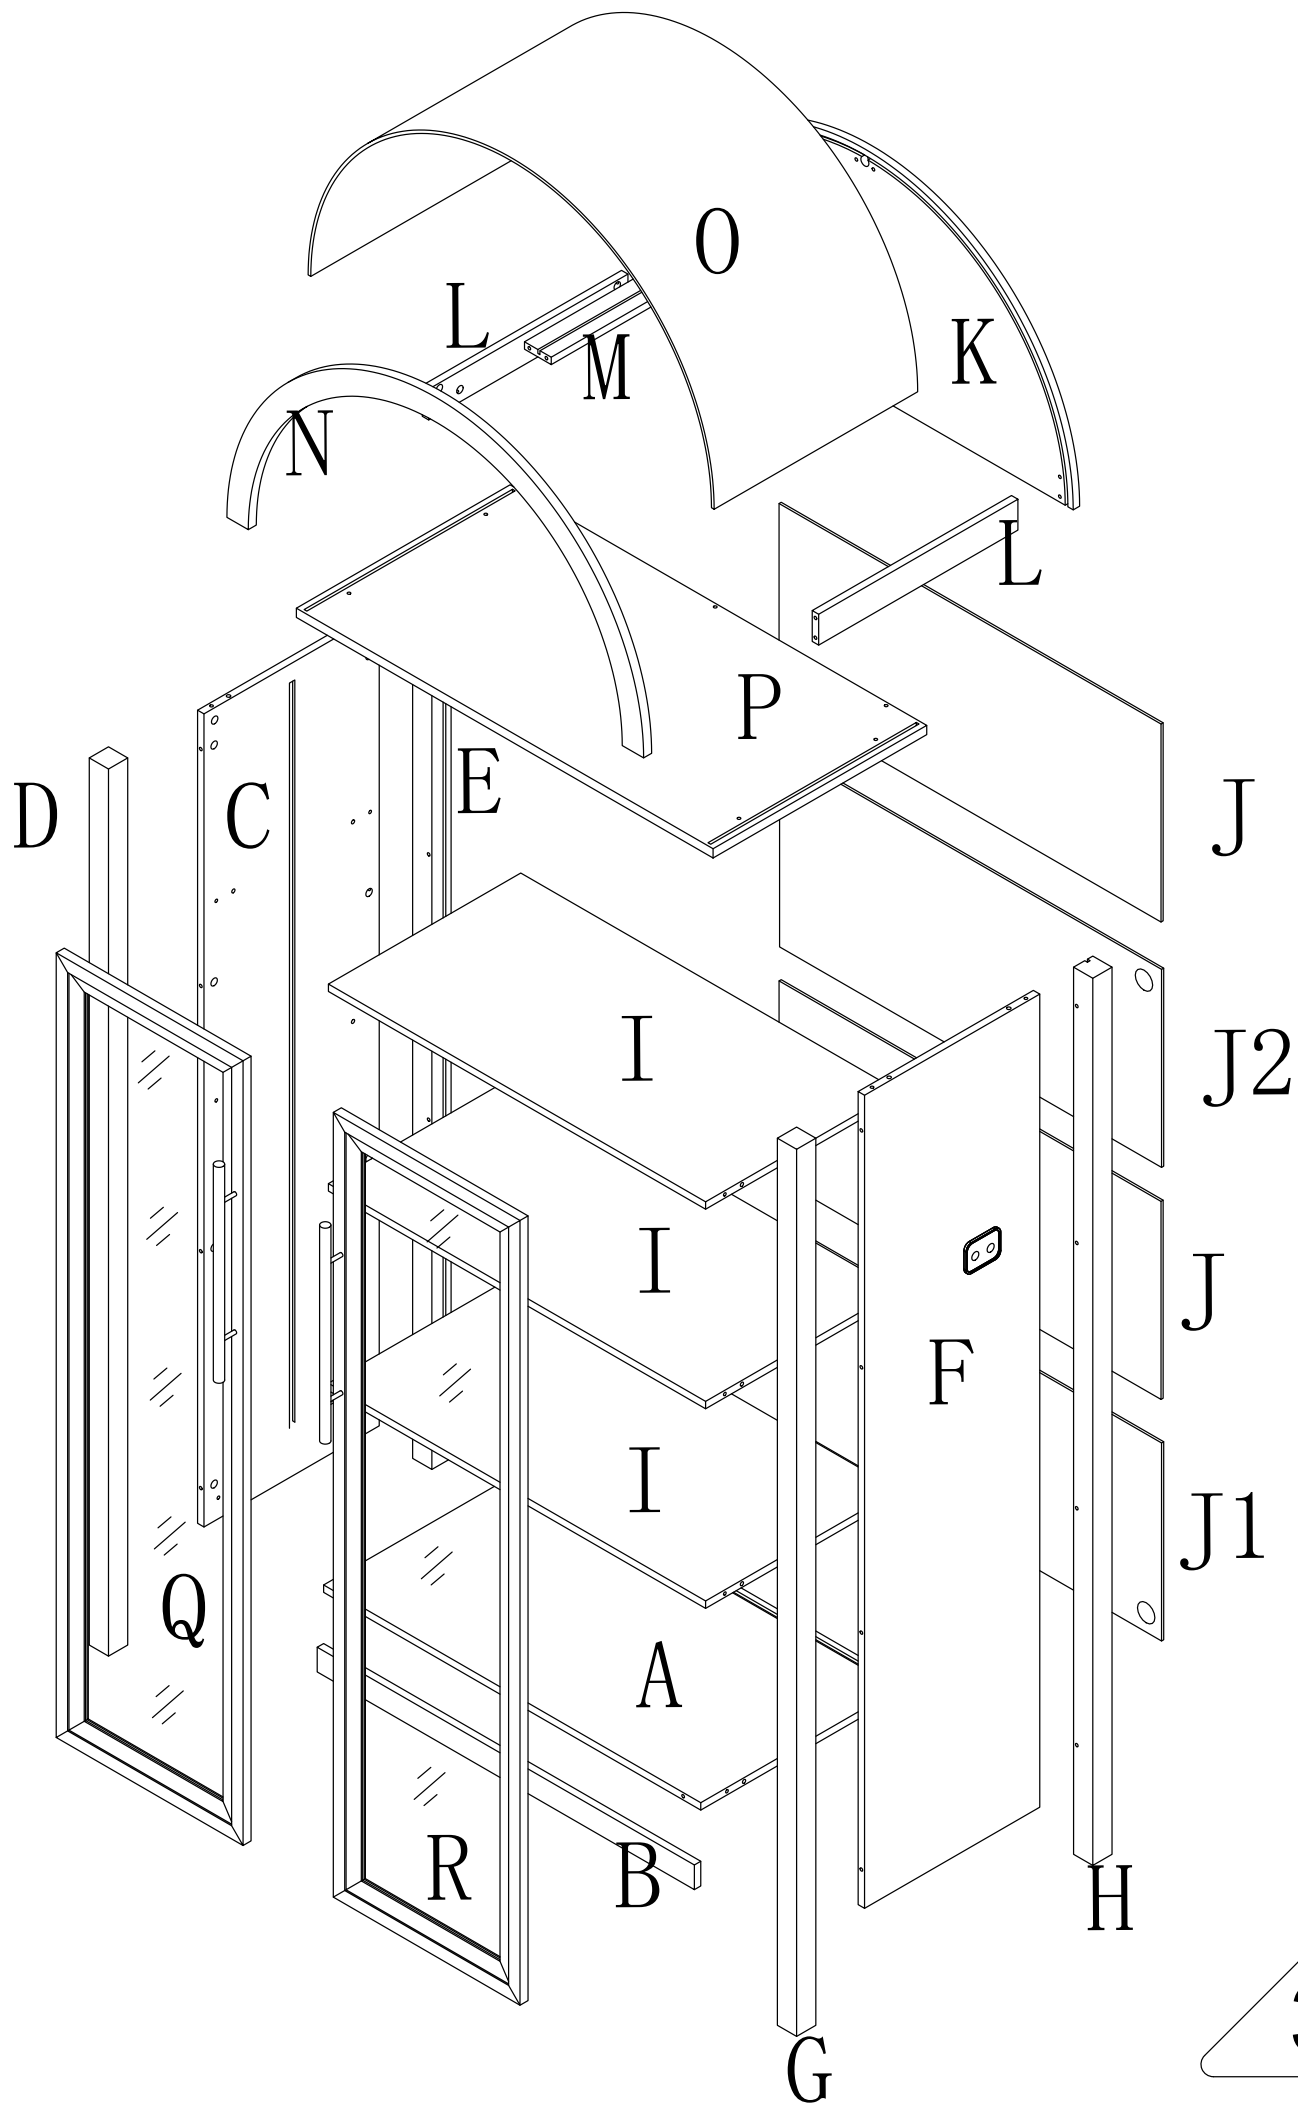


Use parts A and B




Step1

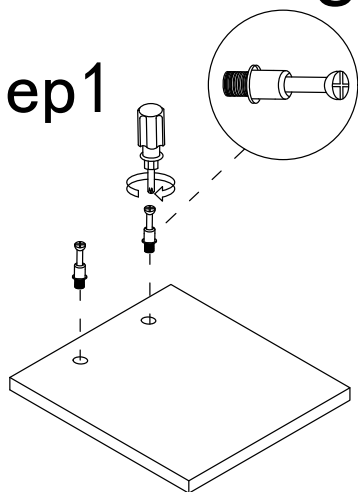

Step2

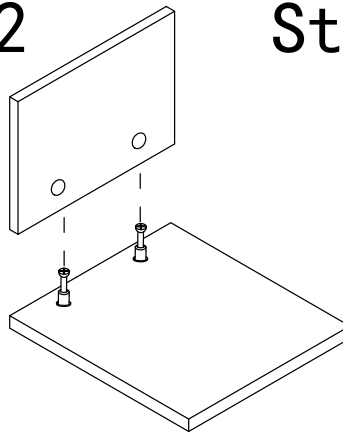



Step3

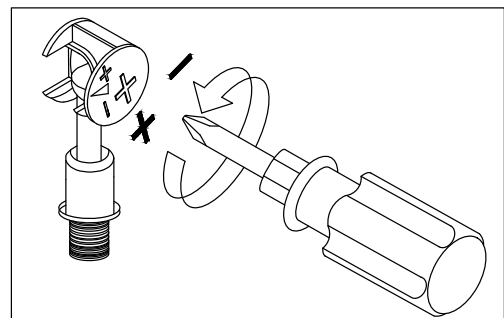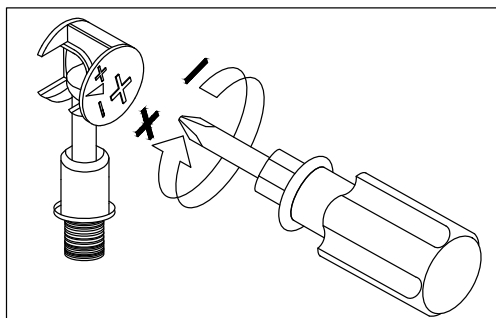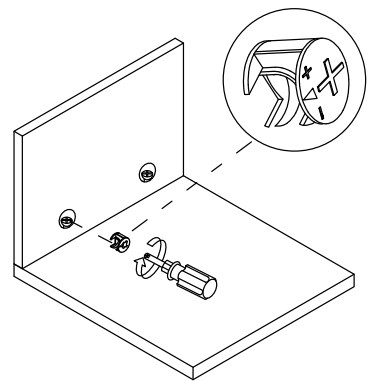

Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

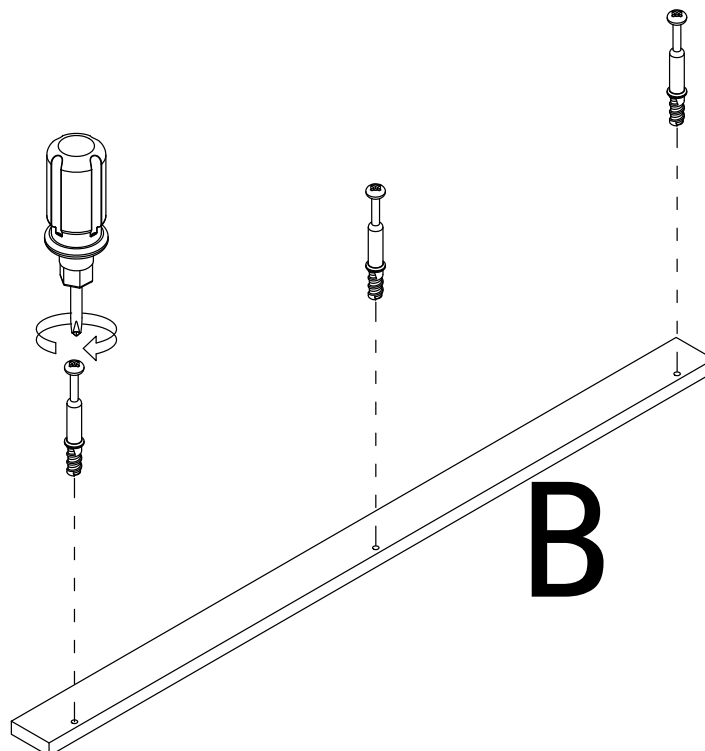


Step 2

2




x3

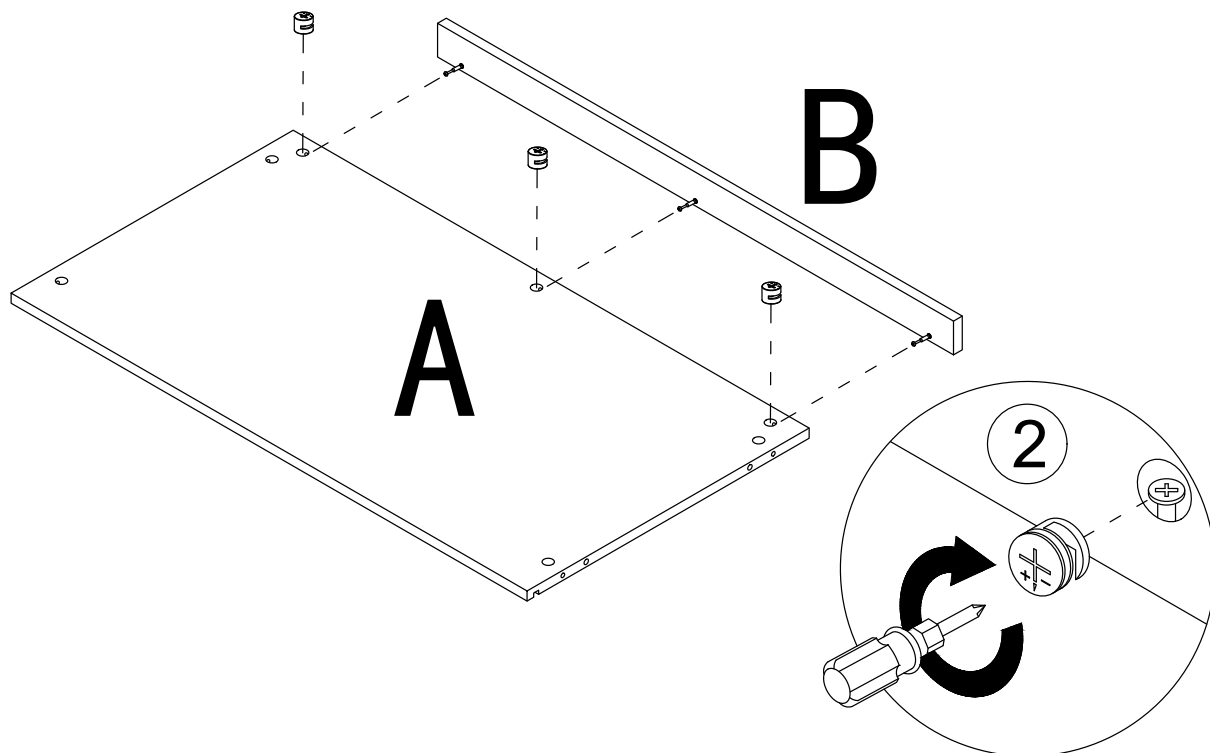


Step 3

1





x4


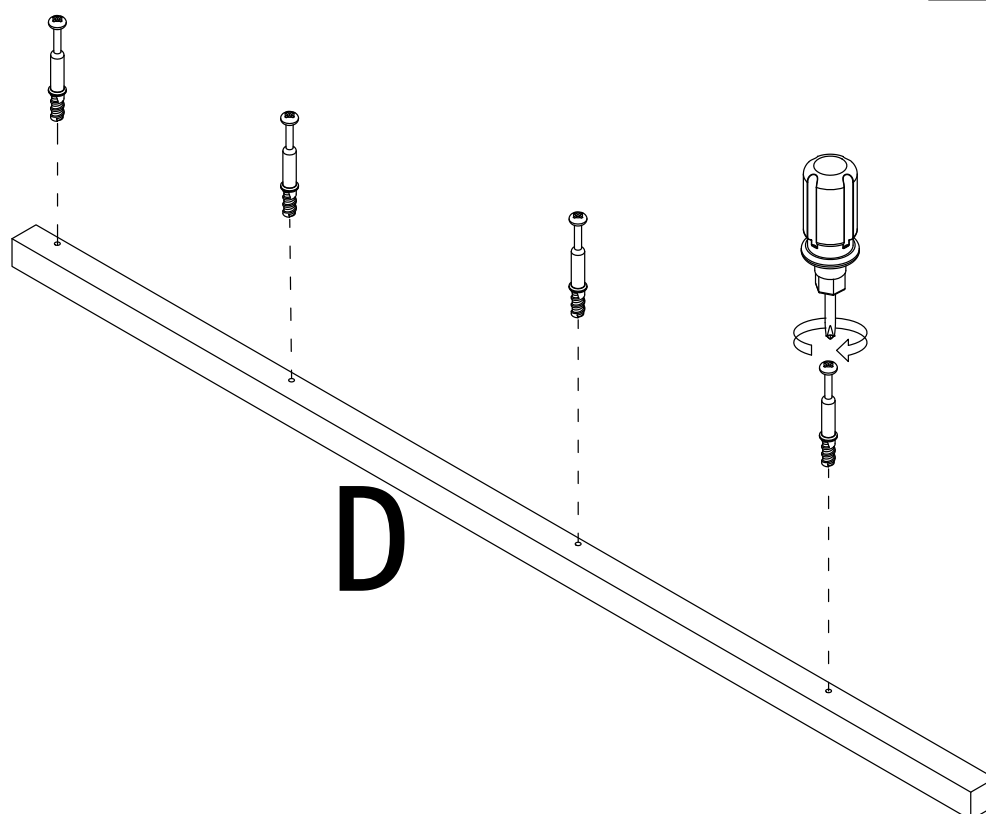


5

Step 4

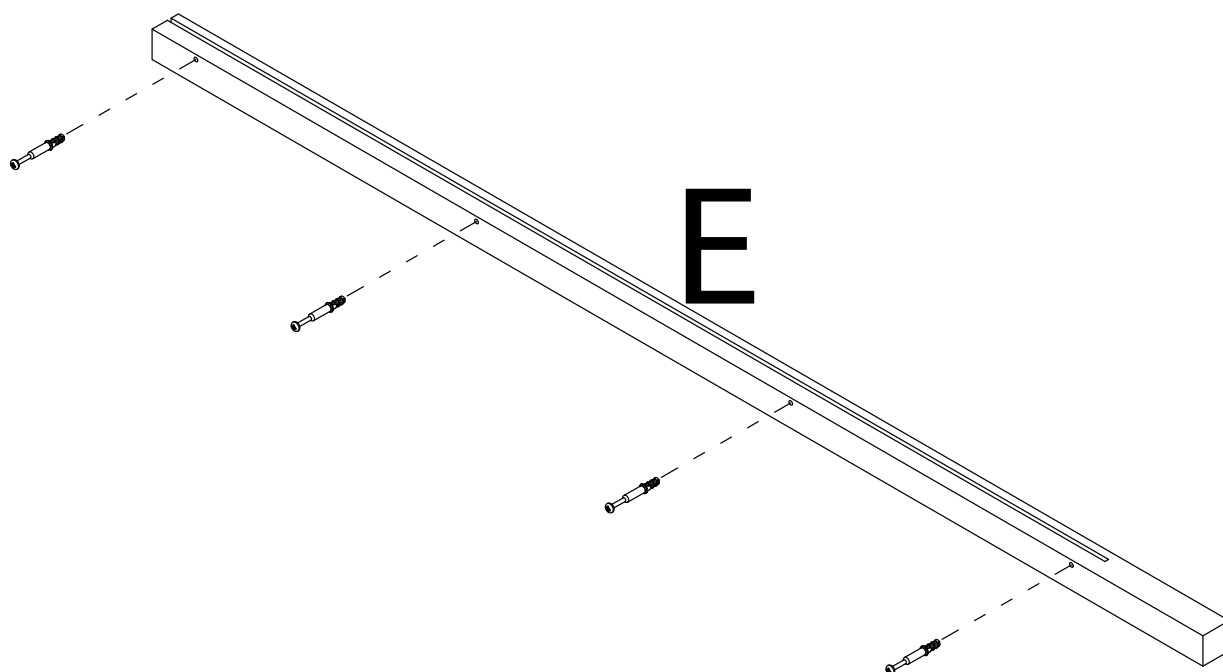

Step 5

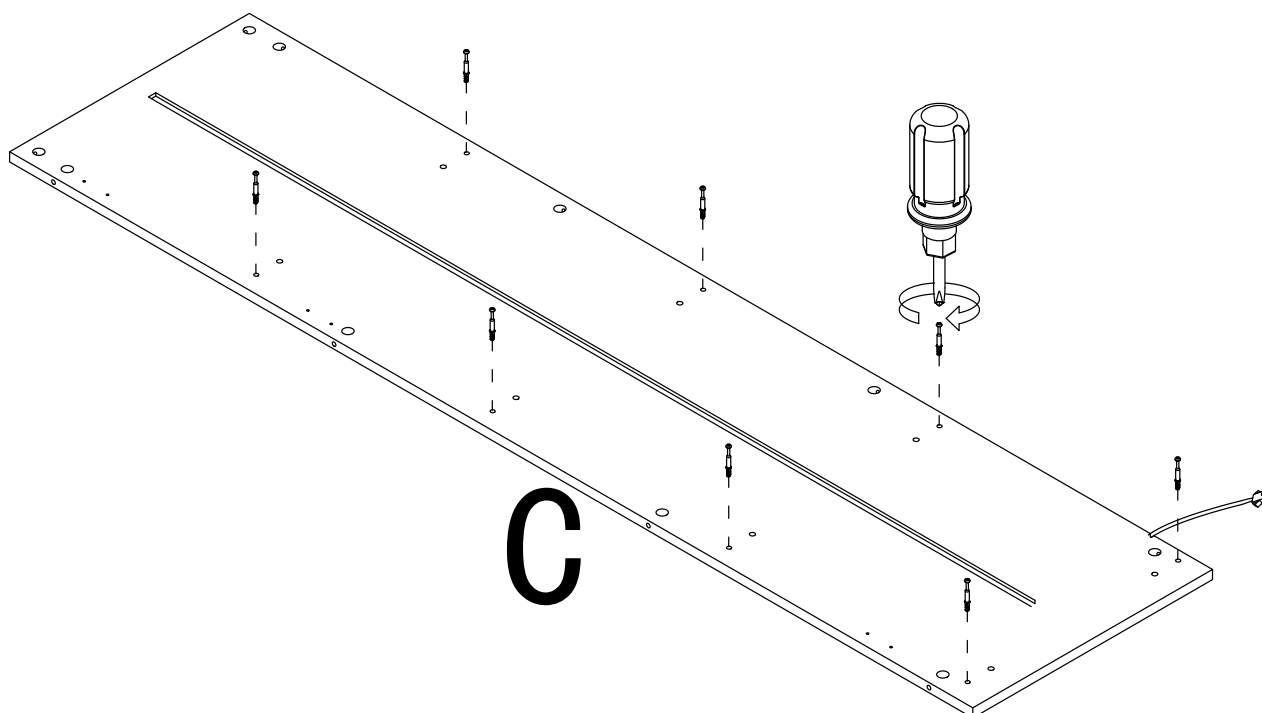


Step 6

2



x8

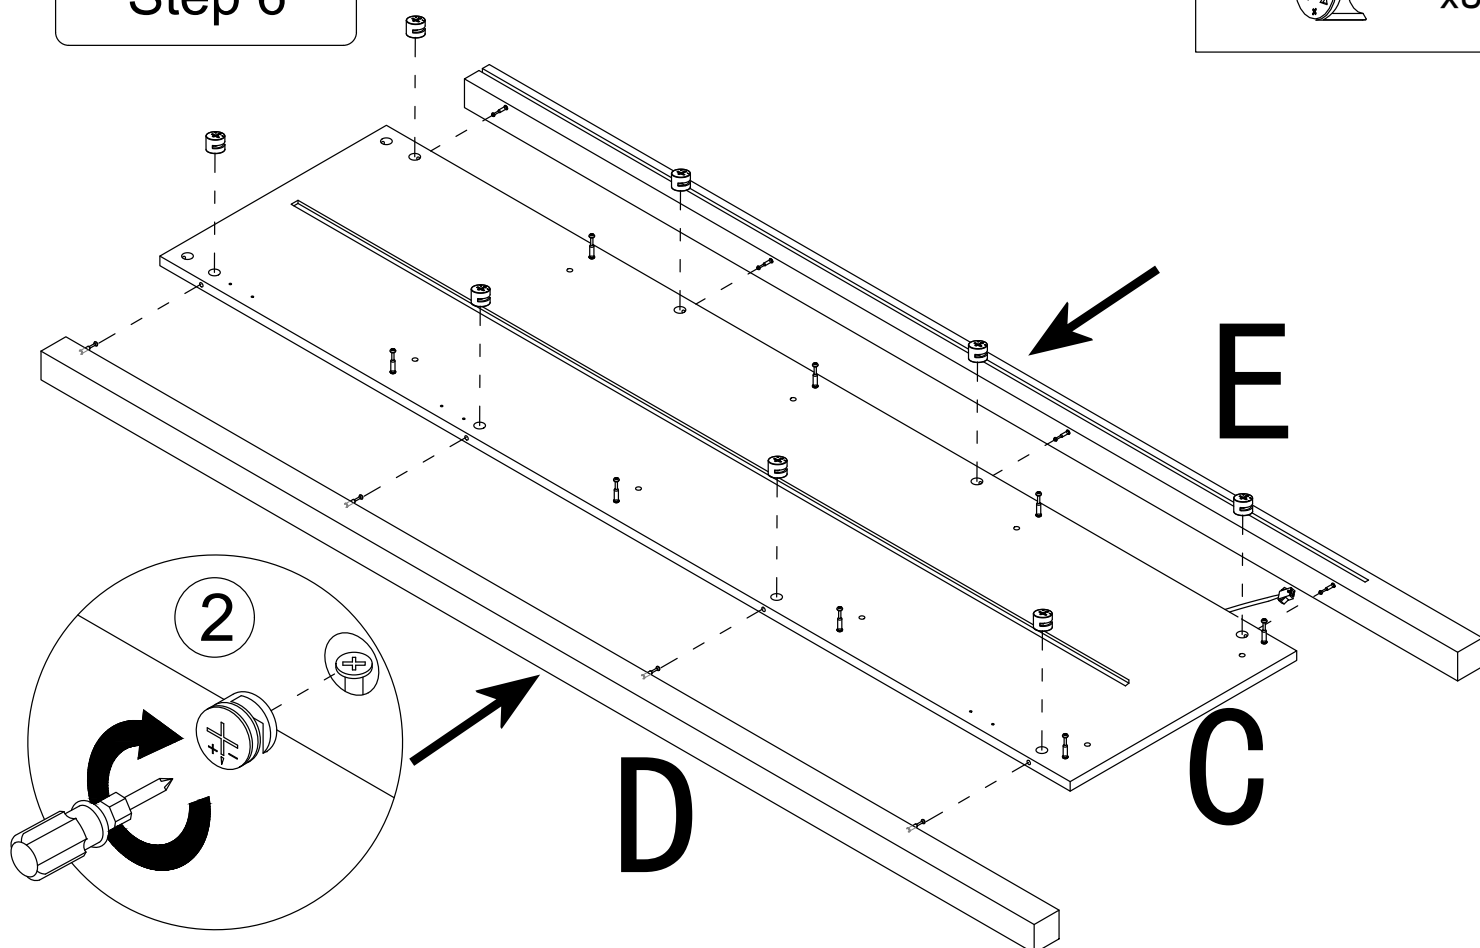


Step 7

3



x8

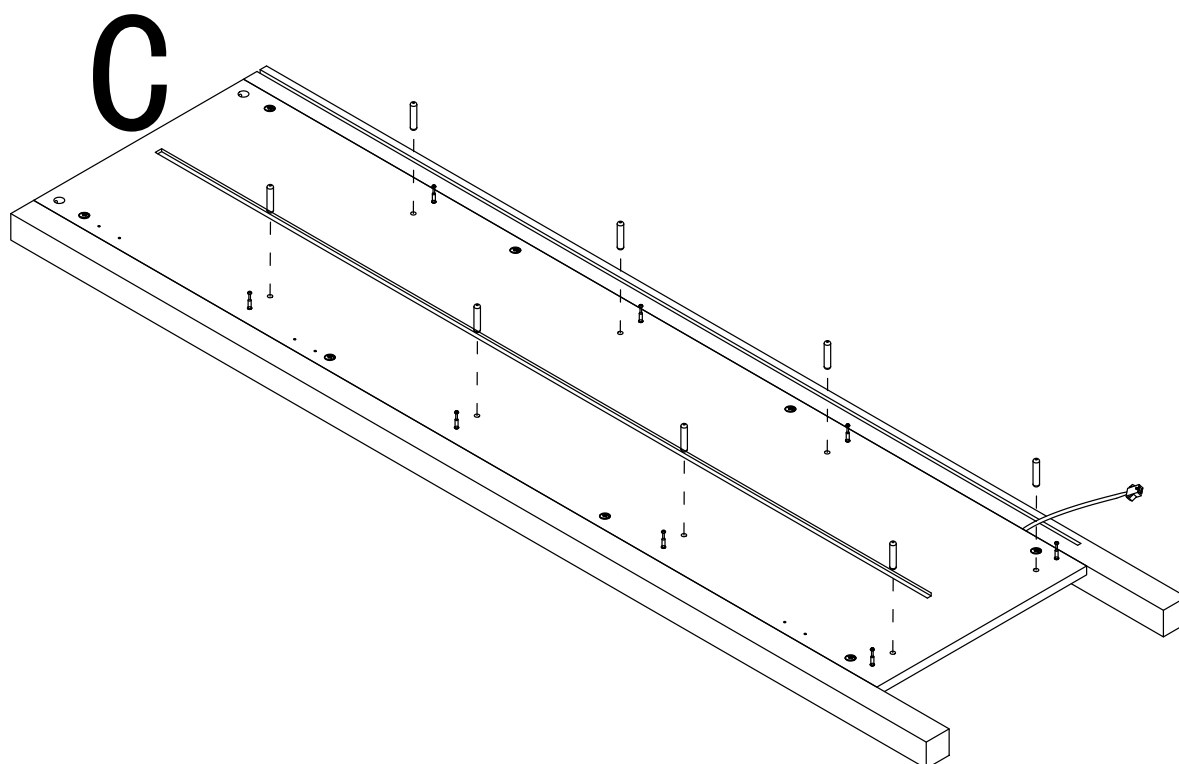


Step 8

2




x8

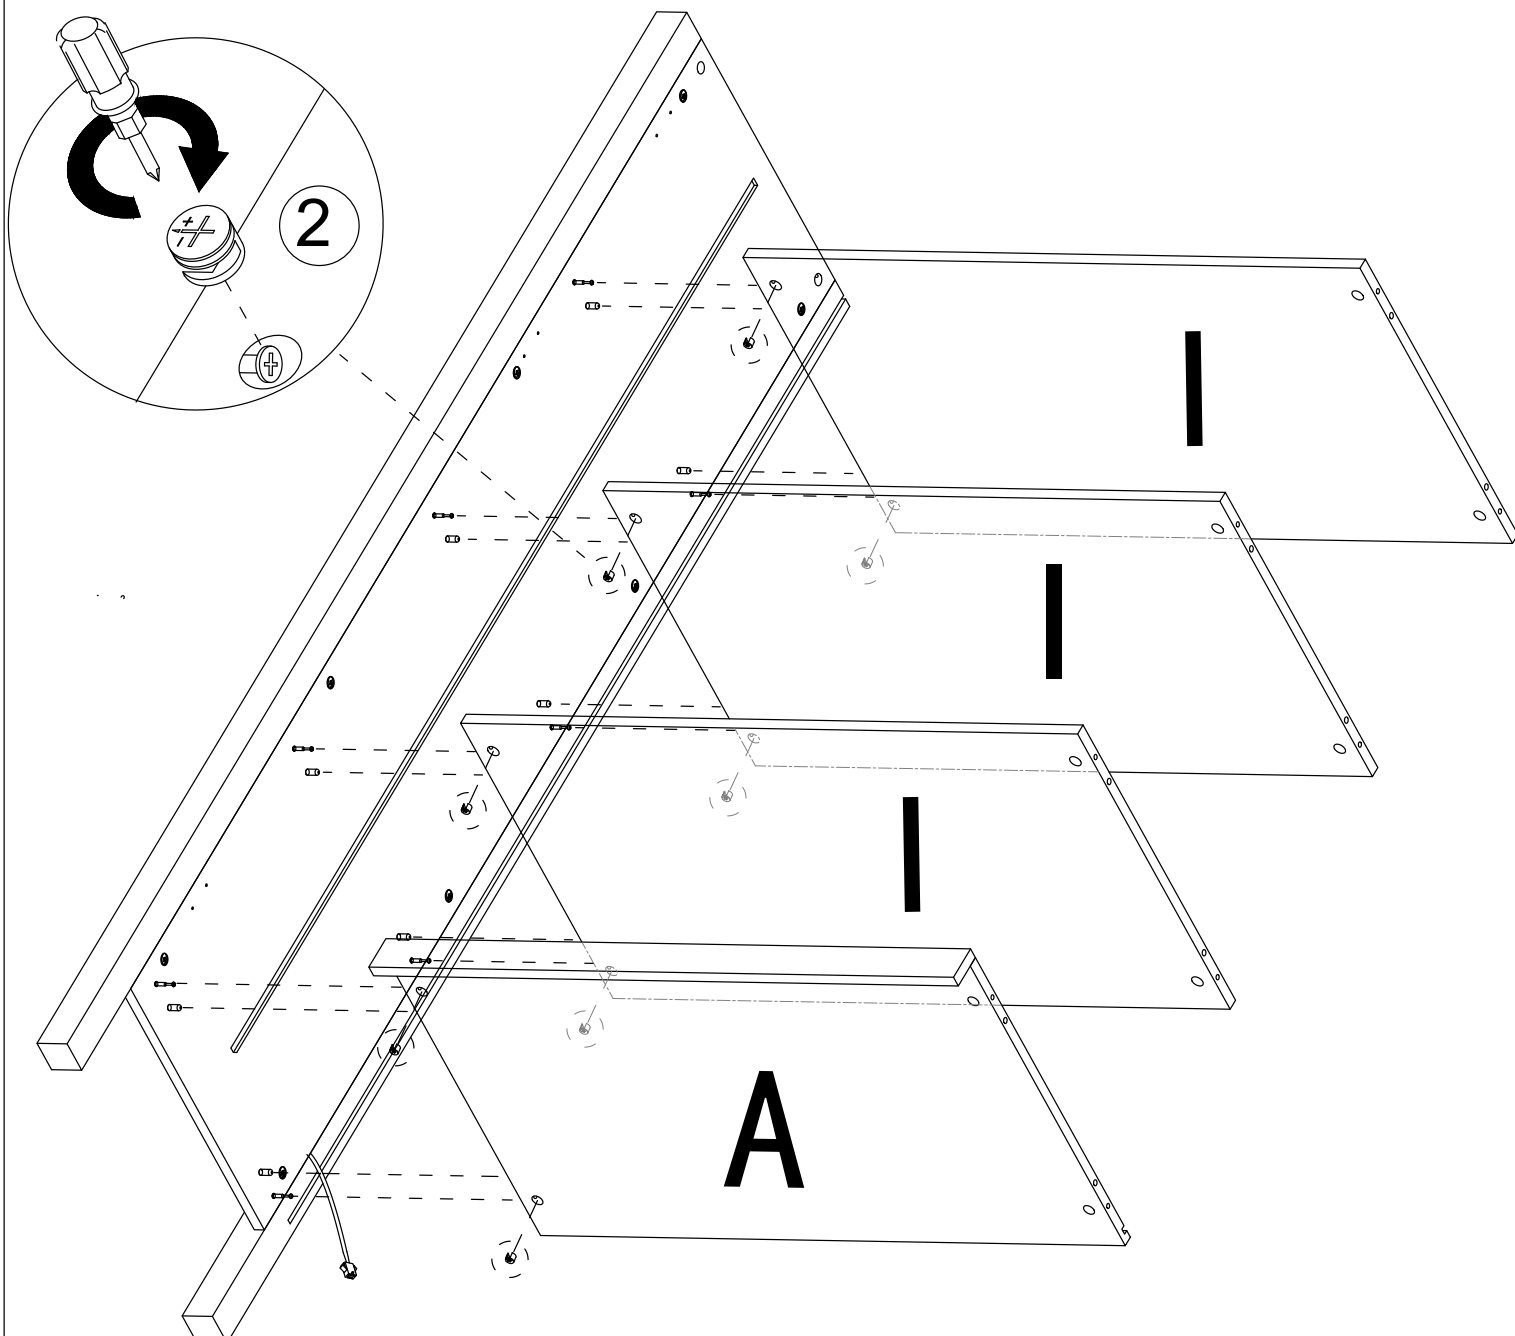


Step 9



3





x8

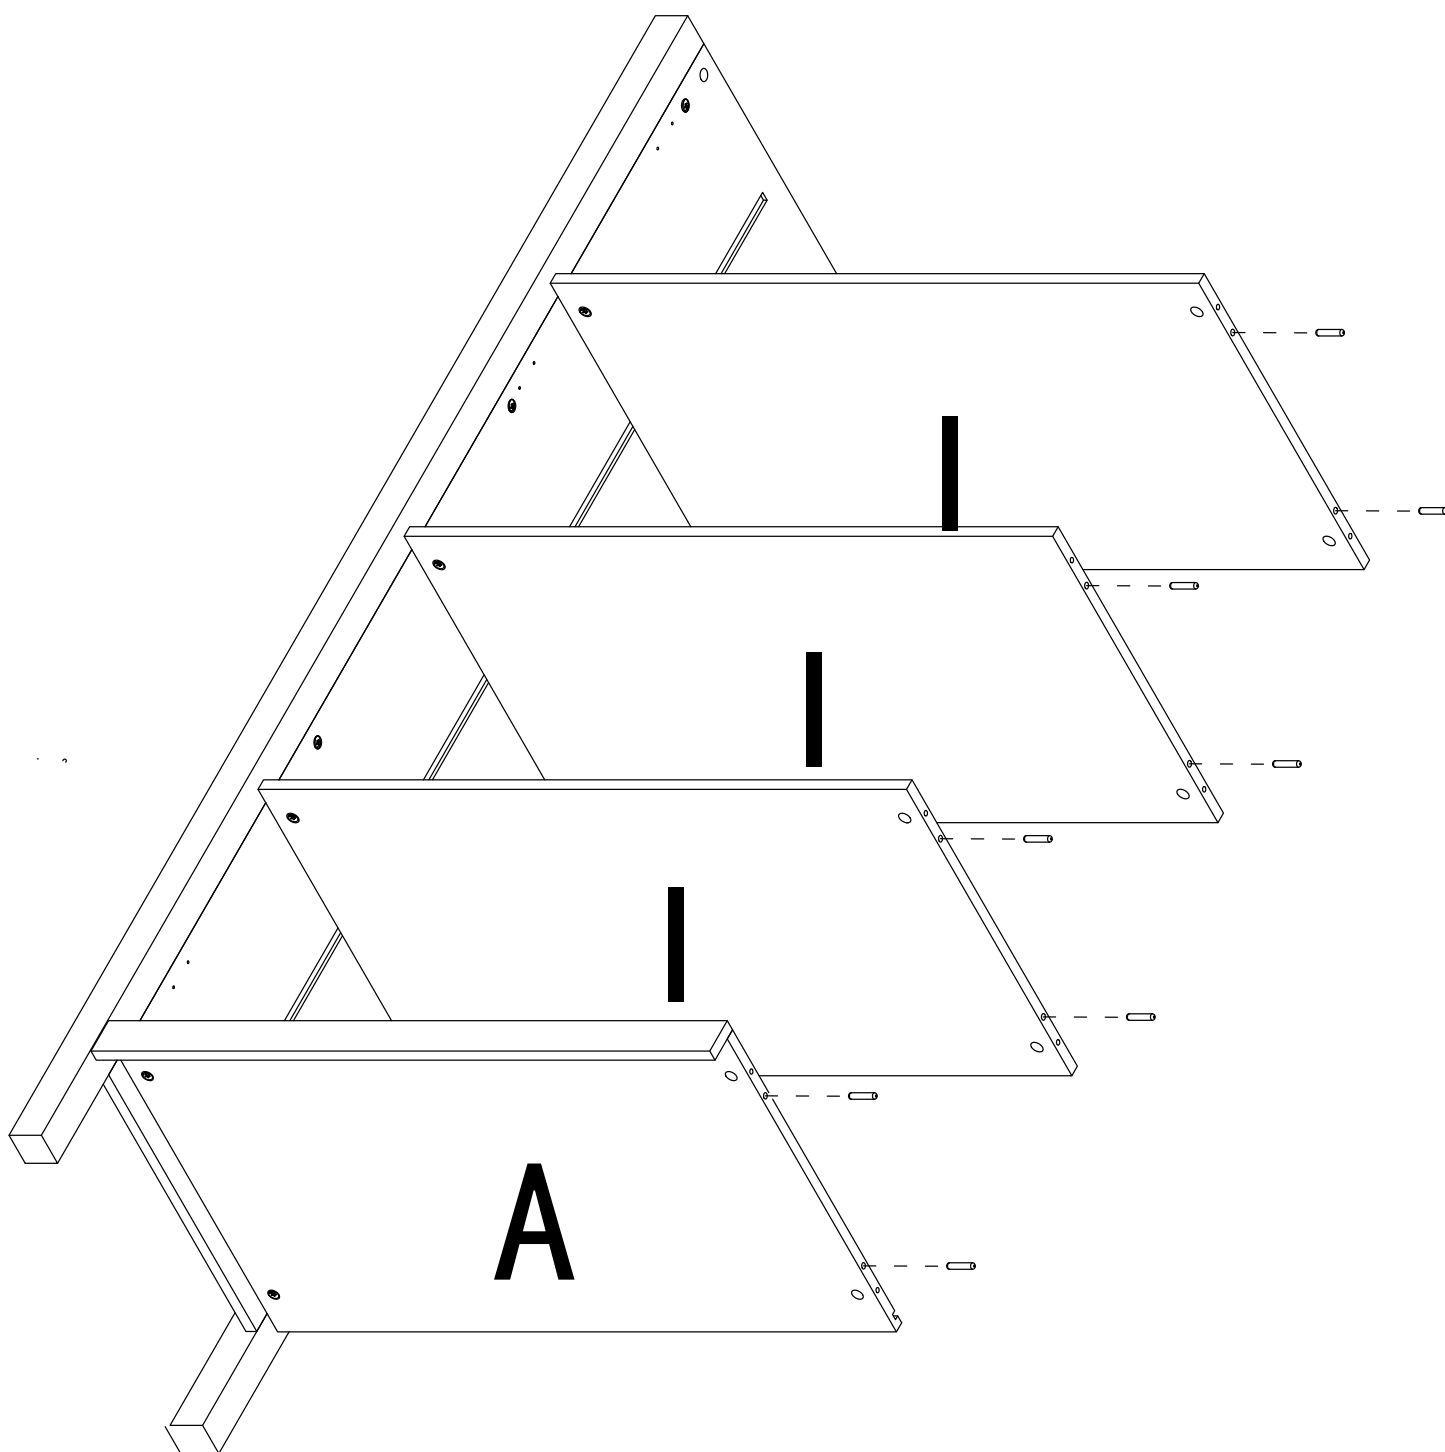



Step 10

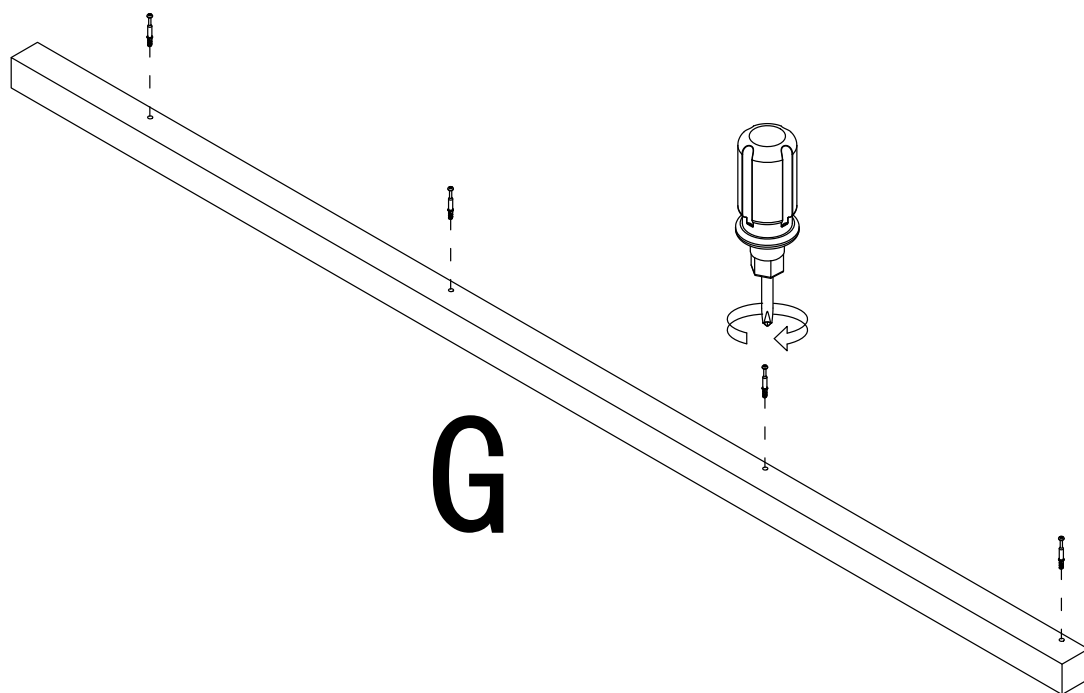



Step 11

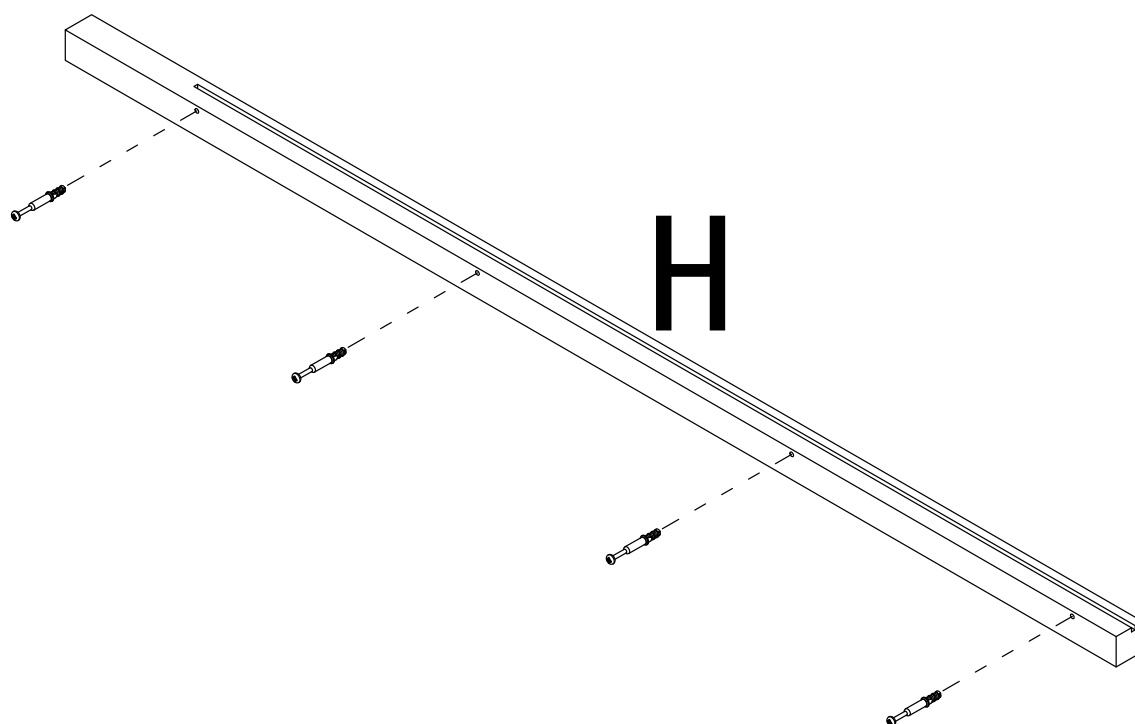

Step 12

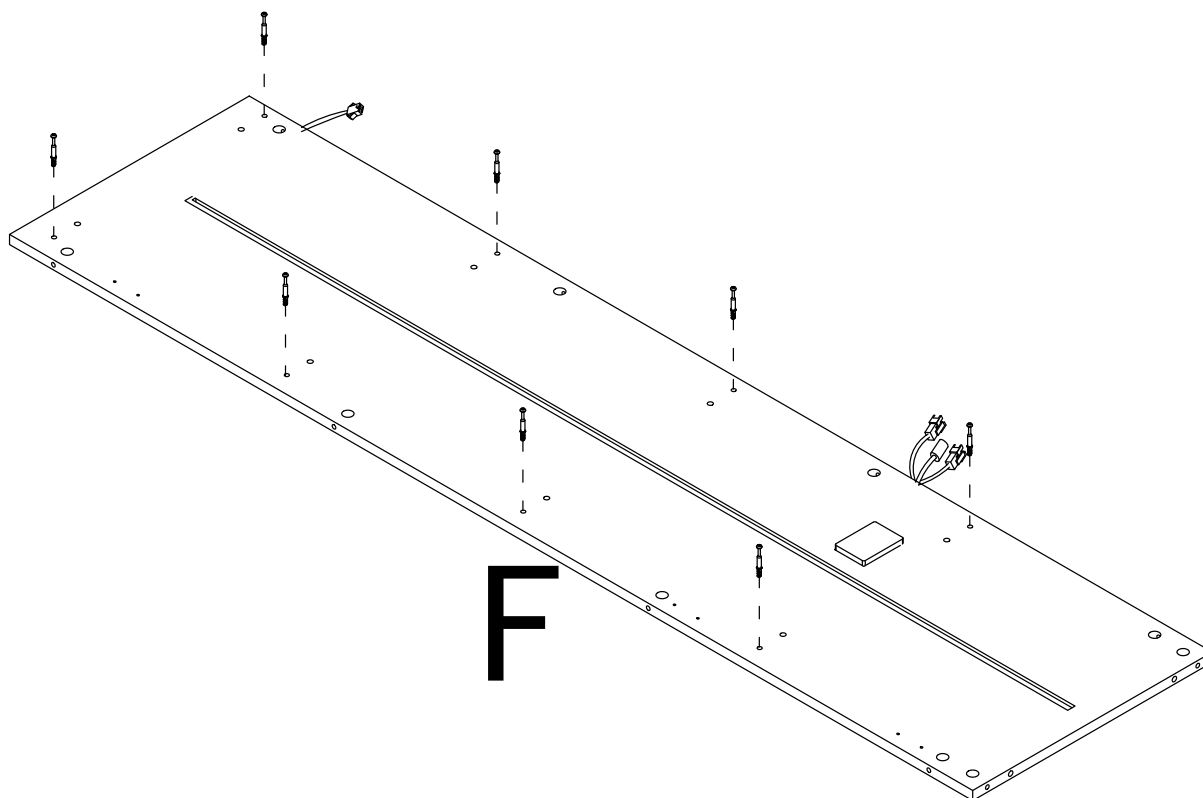

Step 13

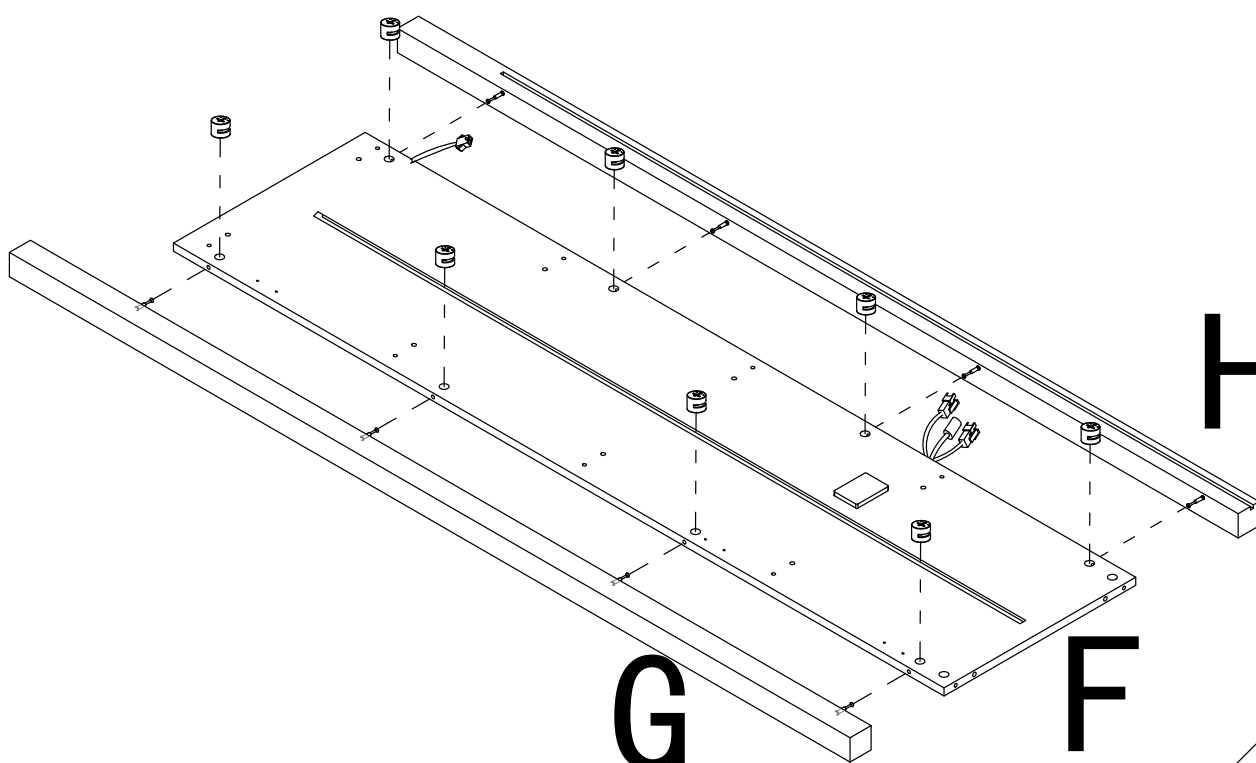


Step 14

2



x8

Please lay all panels flat during installation.

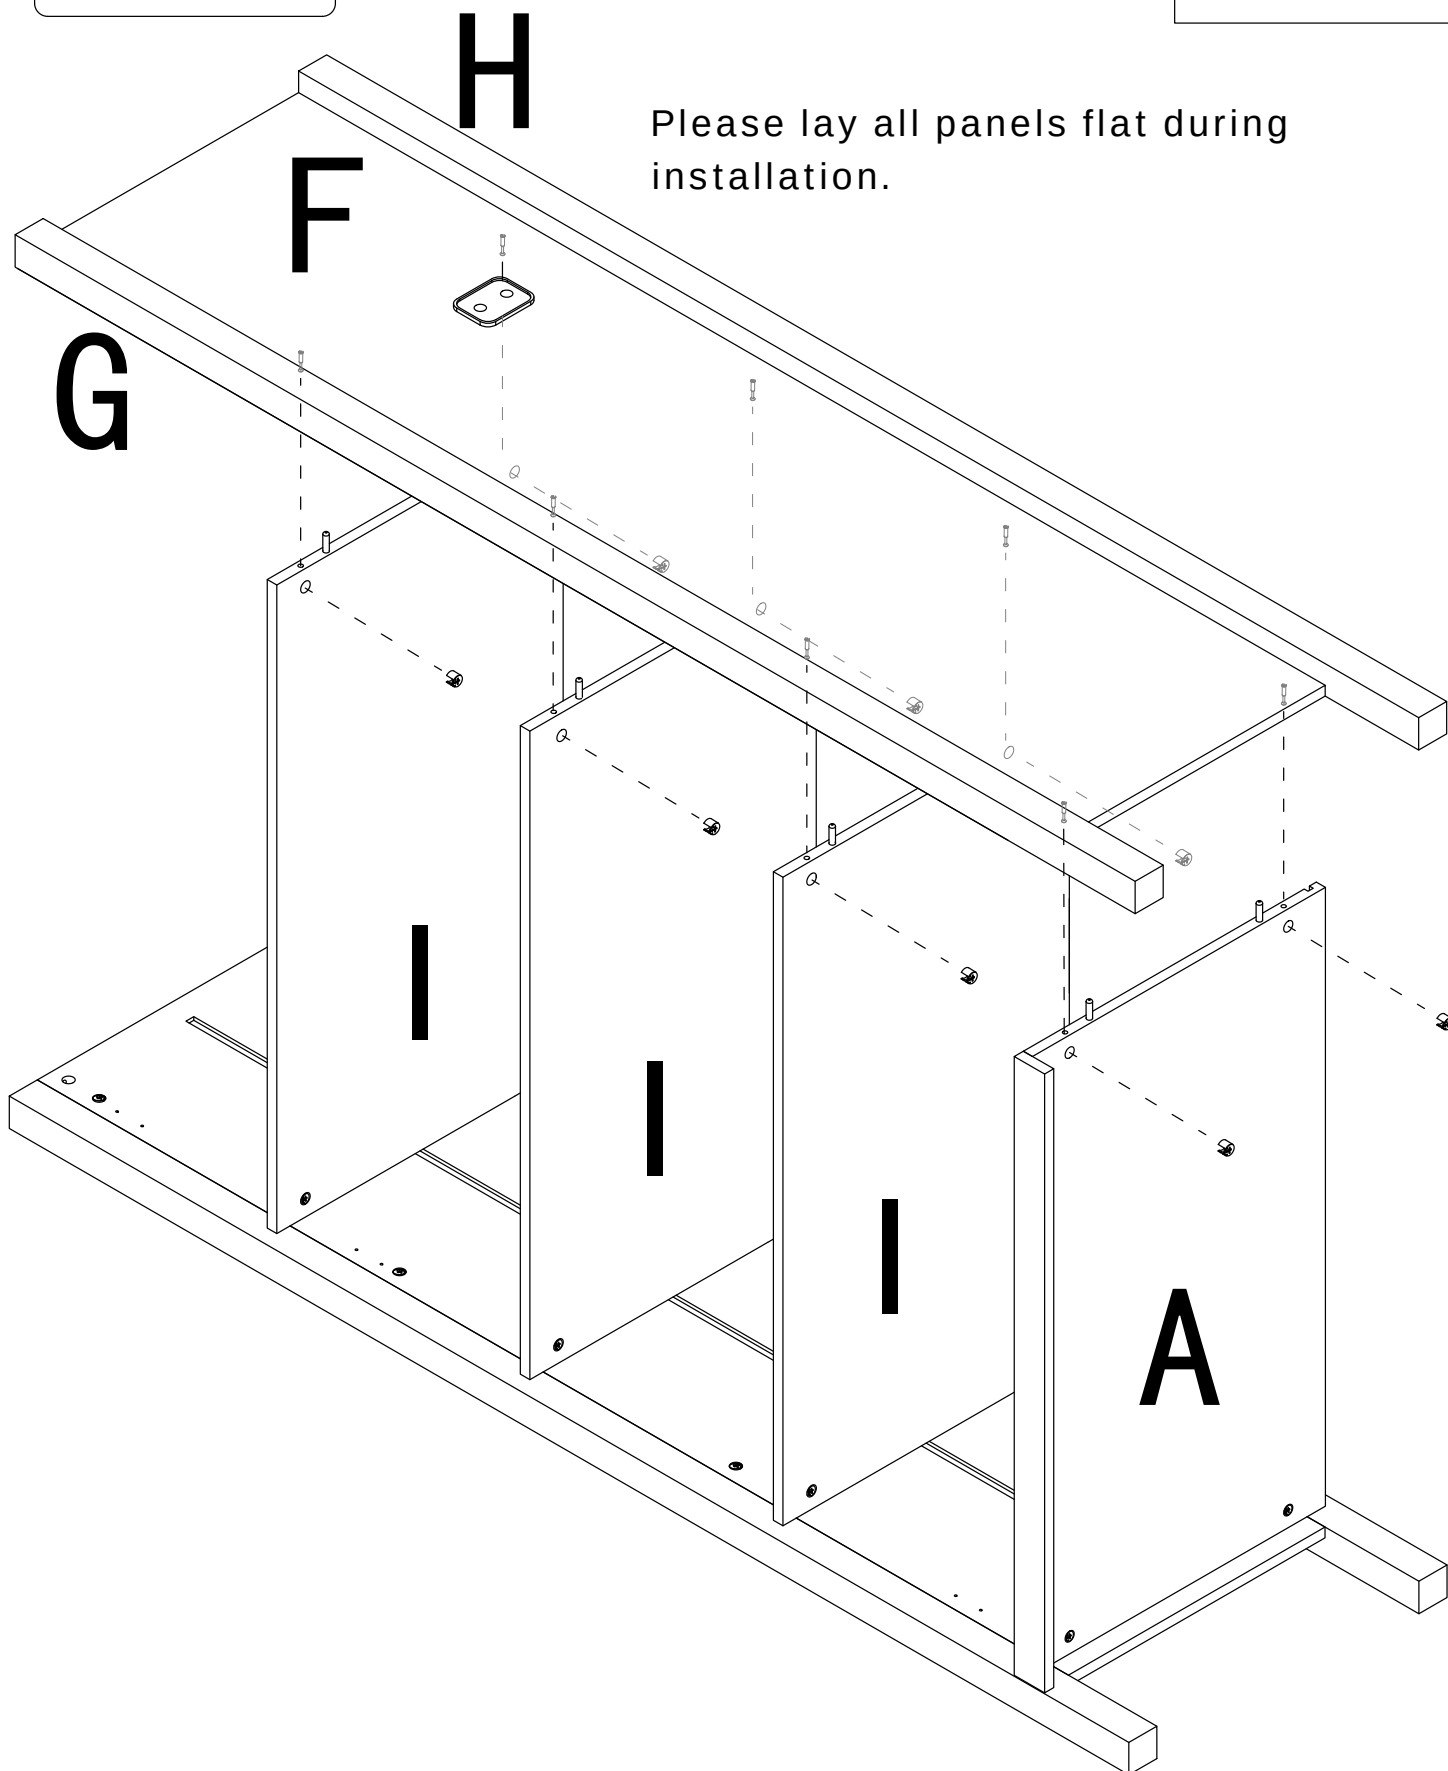


Step 15

④



x4

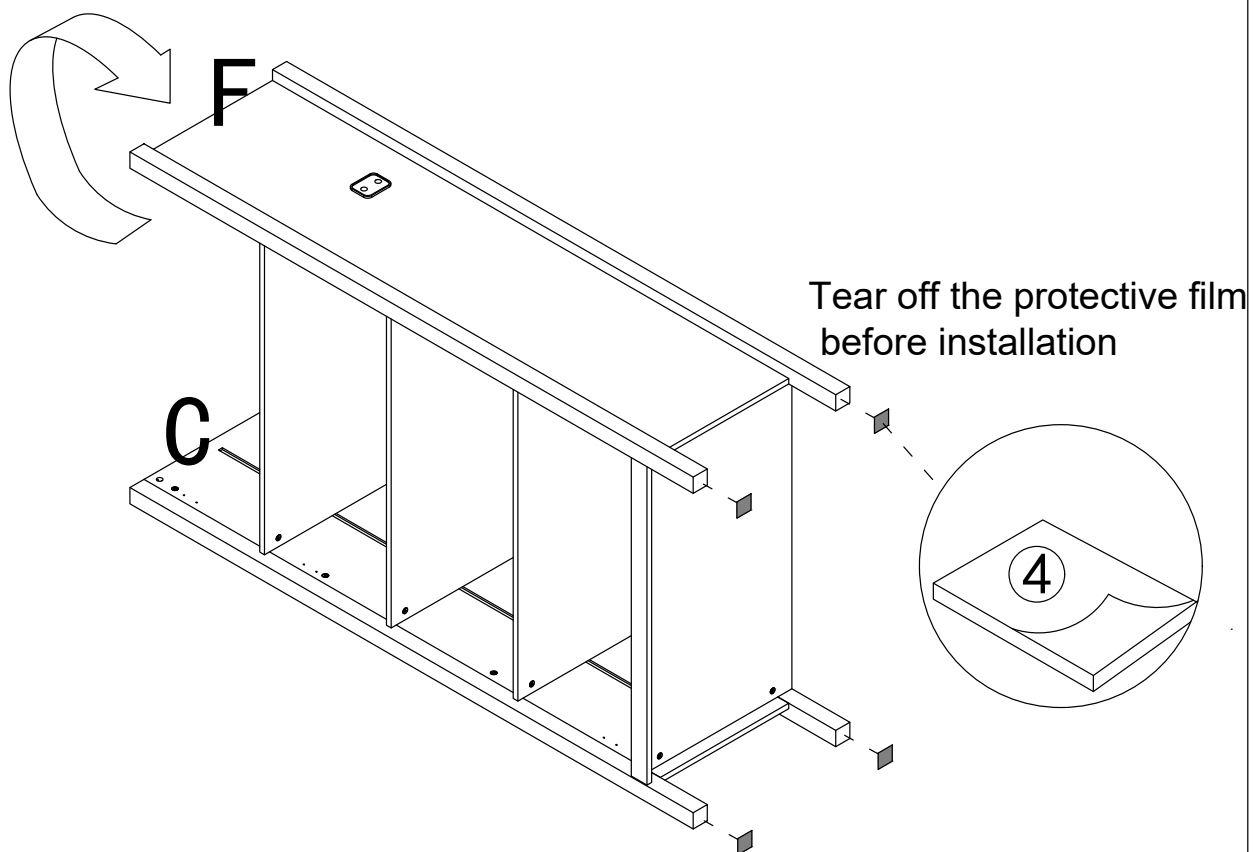


Step 16

③



x4

⑤





x1




x2

Pay attention to the orientation

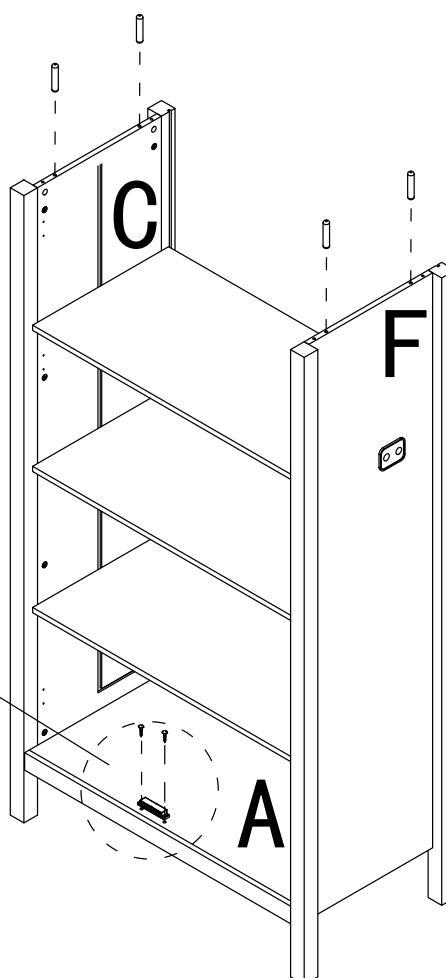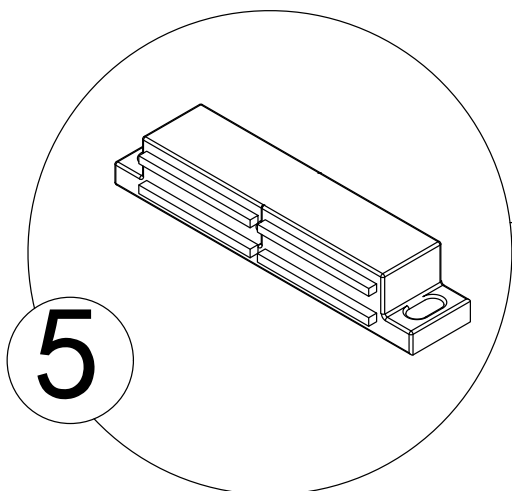


Step 17


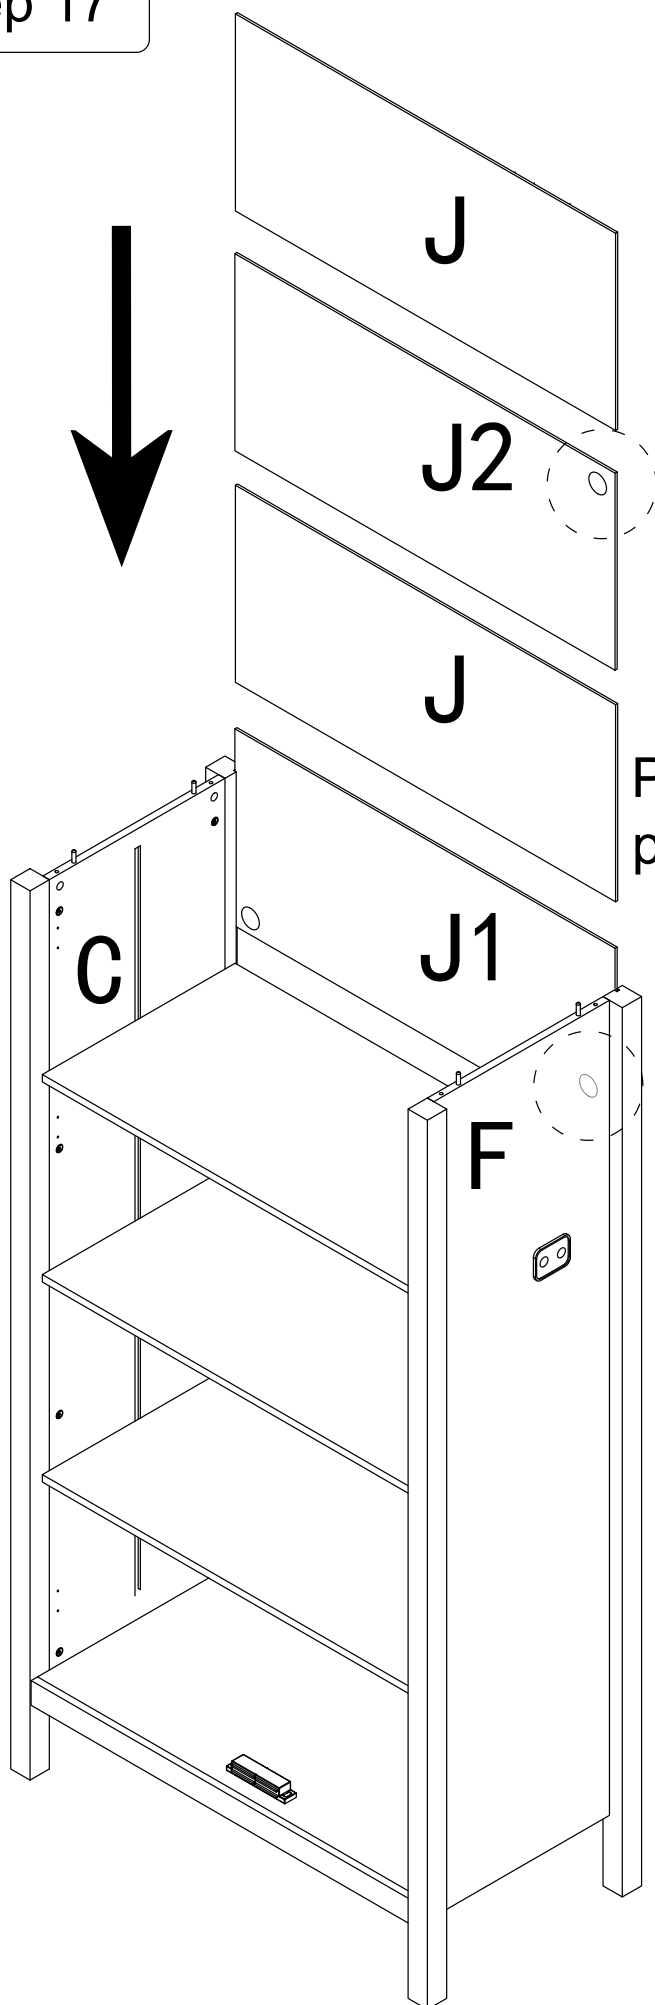


Please pay attention to the position of the outlet hole

Step 18


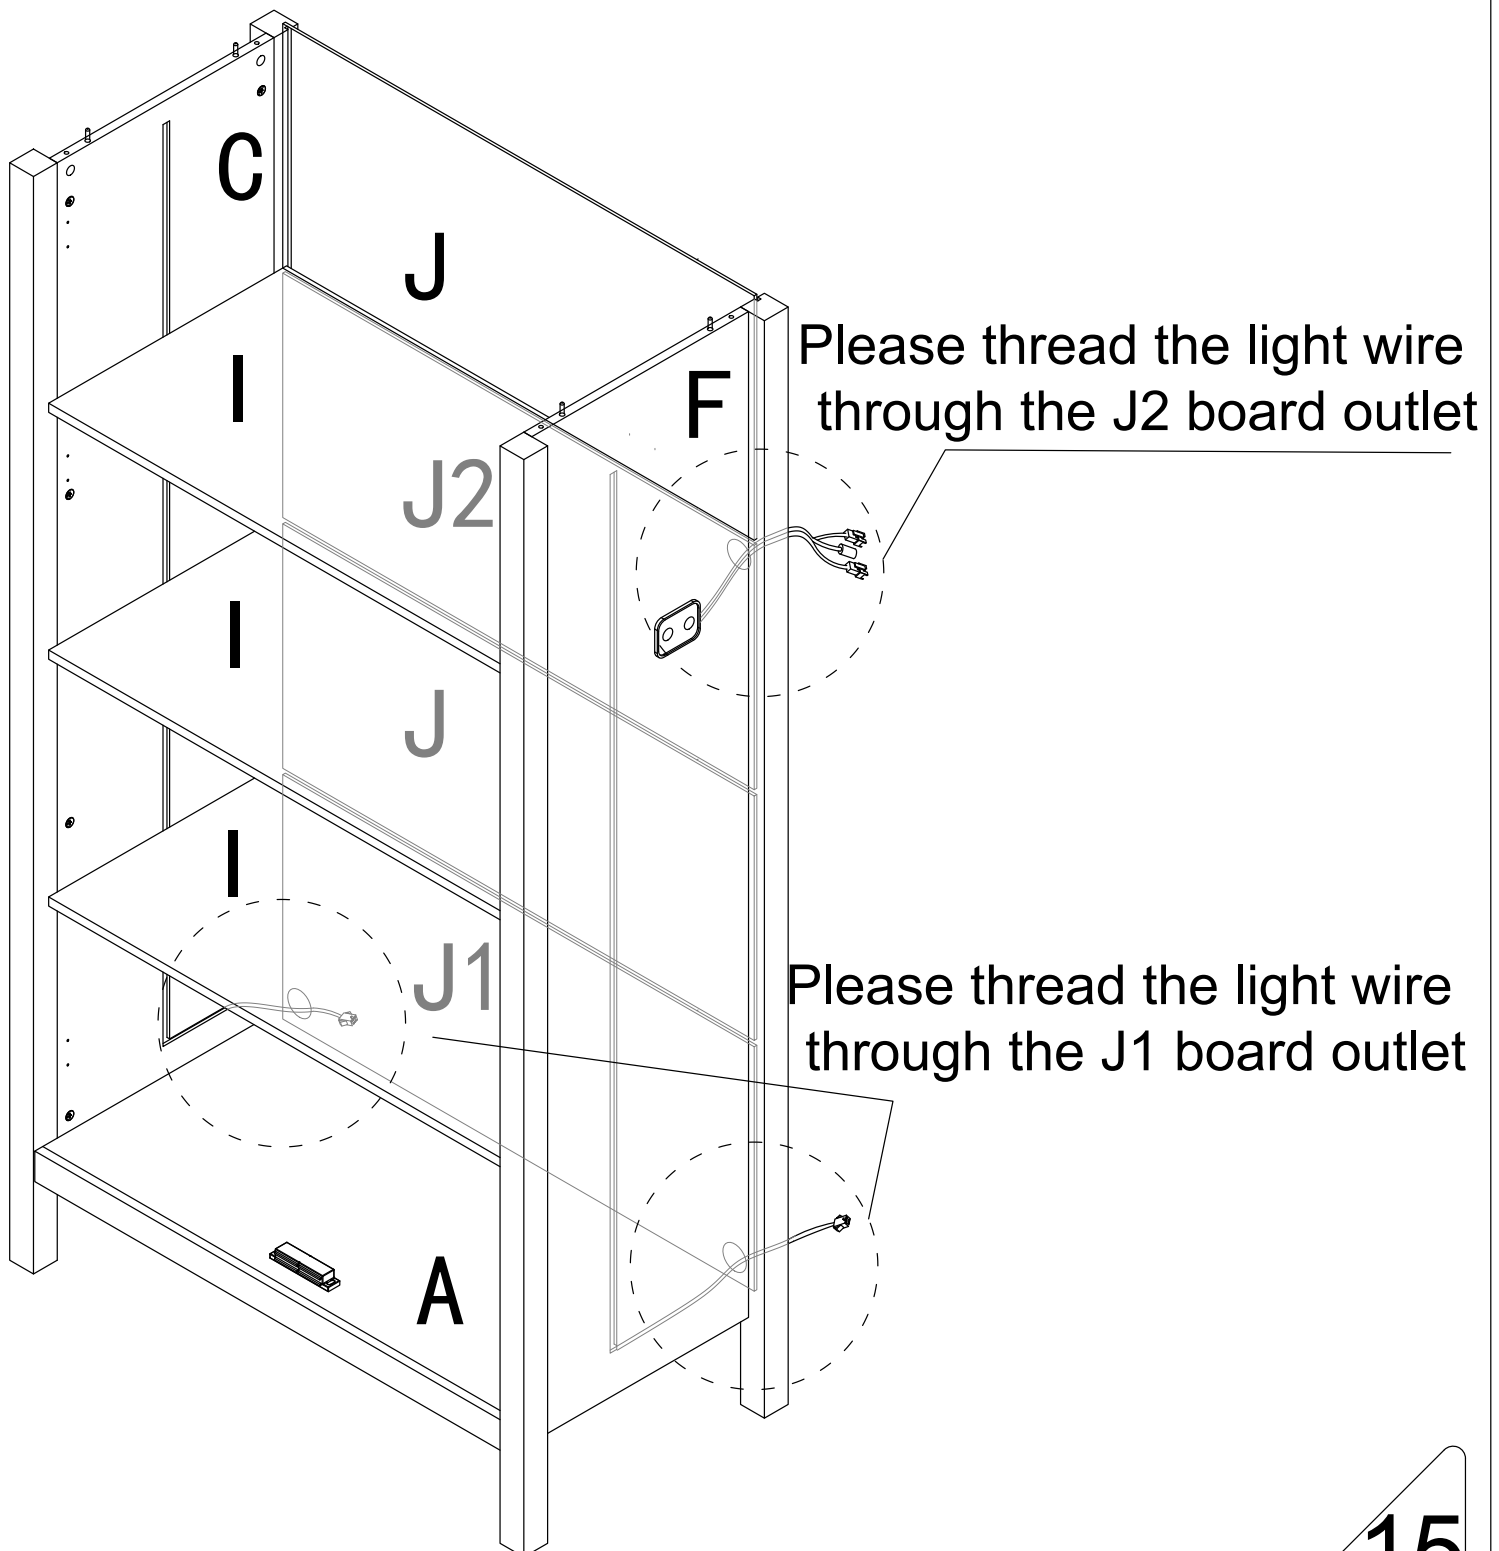


Step 19

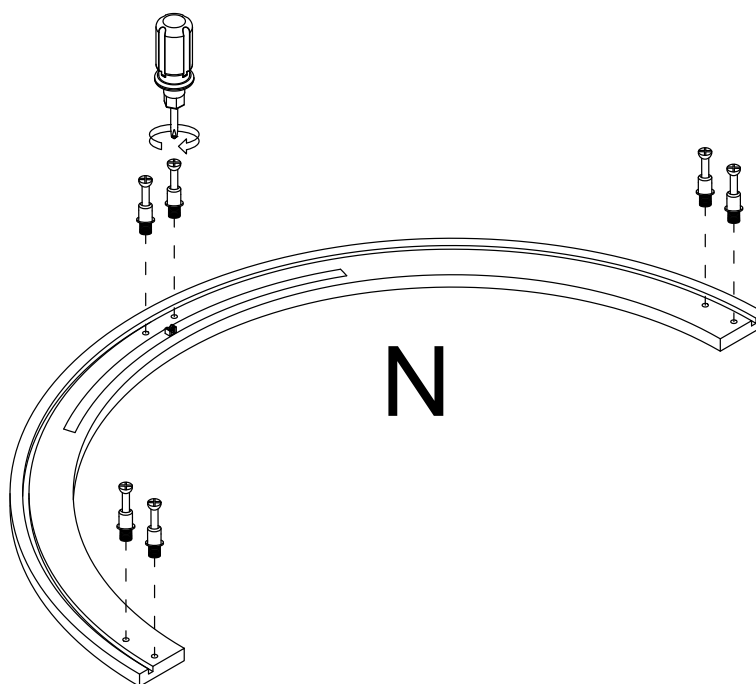

Step 20

Connect the light cable socket

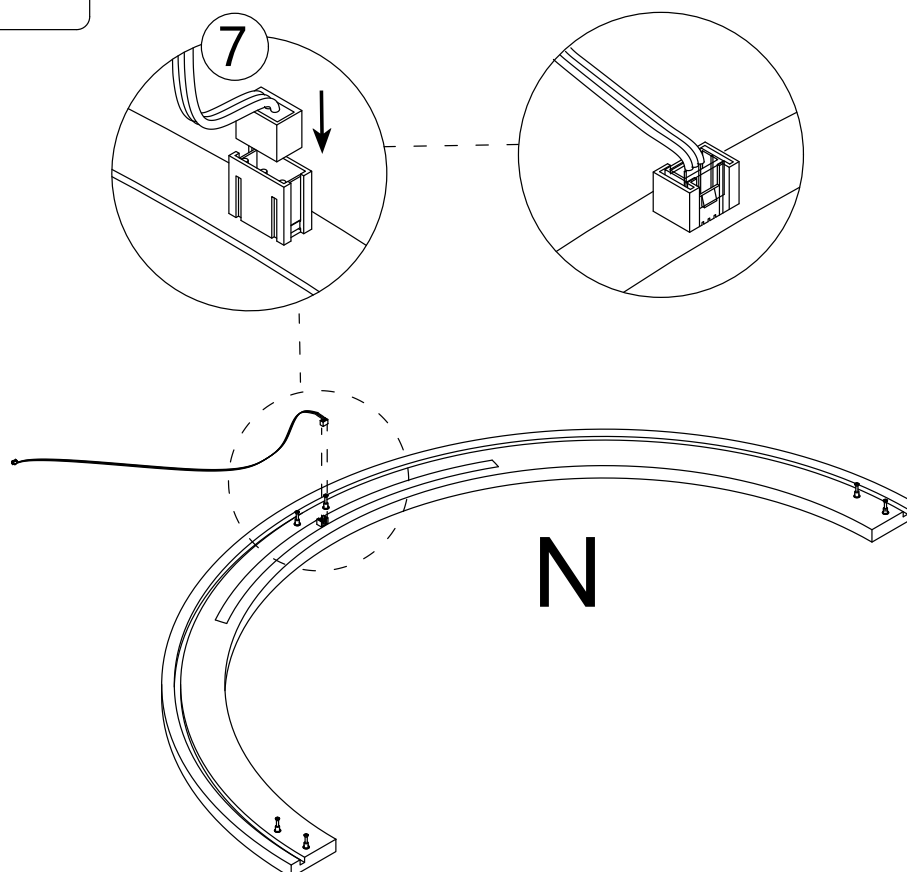


Step 21

2




x6

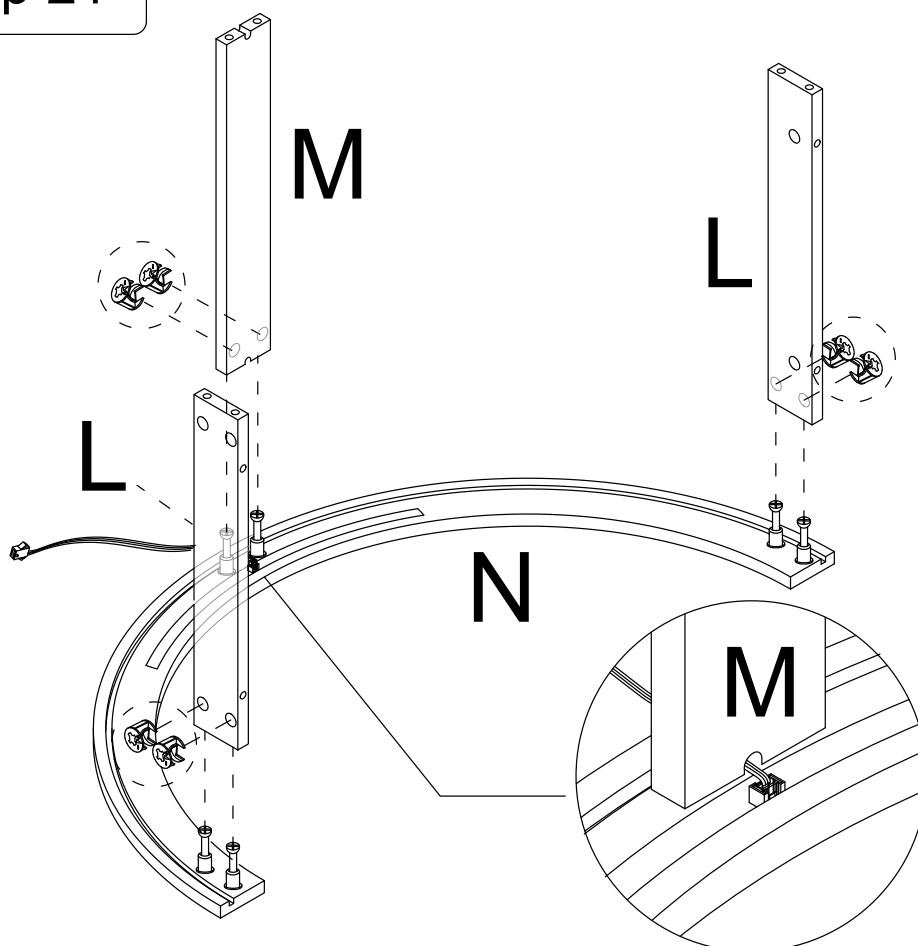


Thread the light wire through board M and tighten the nut

Step 22

6





x1

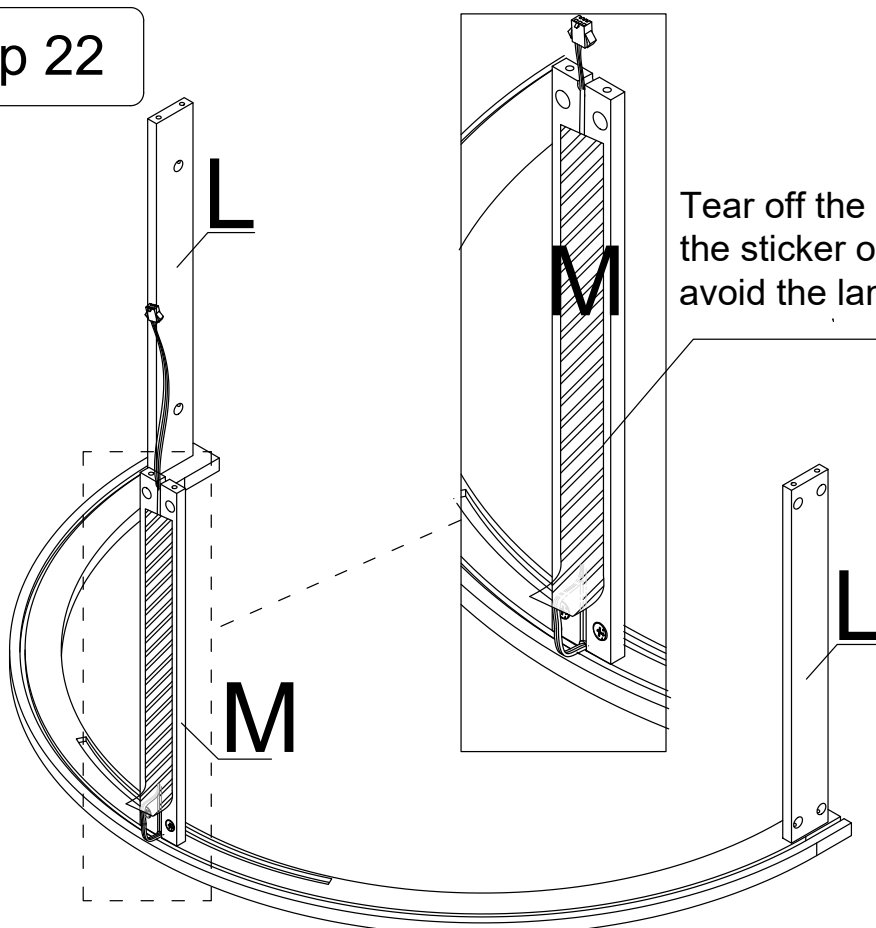


Tear off the release paper and stick the sticker on the M-plate lamp slot to avoid the lamp wire from falling off.

Step 23

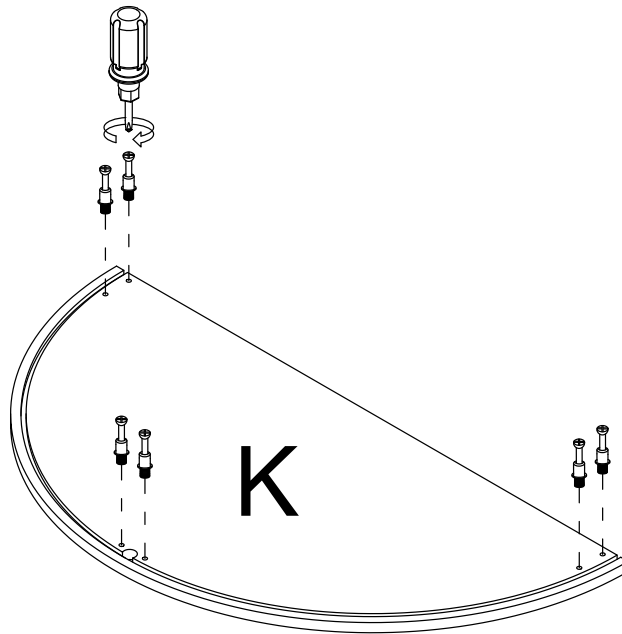

Step 24


Passing through the hole of plate K

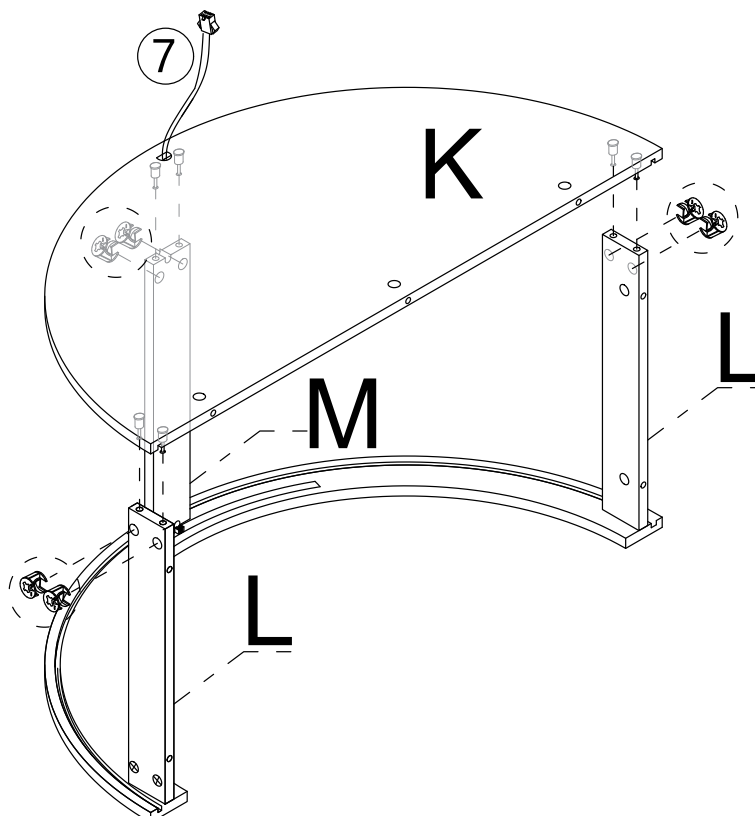

Note:




How to install the arched frame

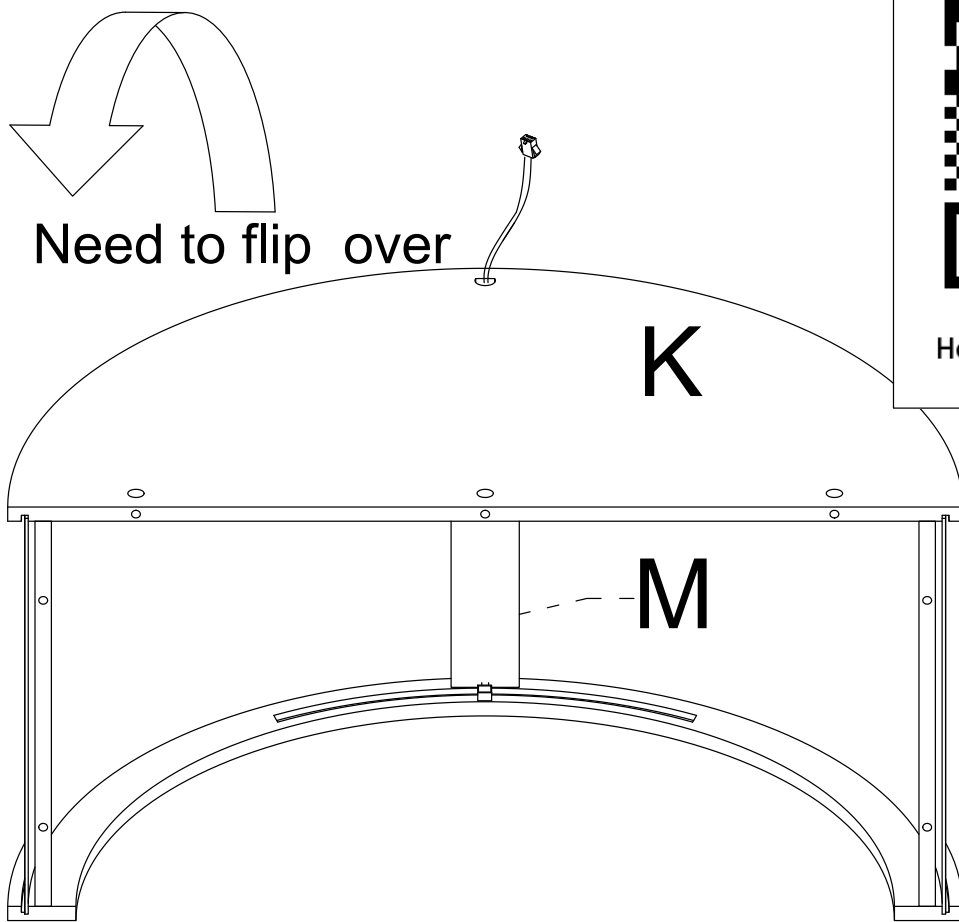


Need to flip over

Note: When installing the O plate, push the middle of the O plate by hand to push the O plate into the groove.

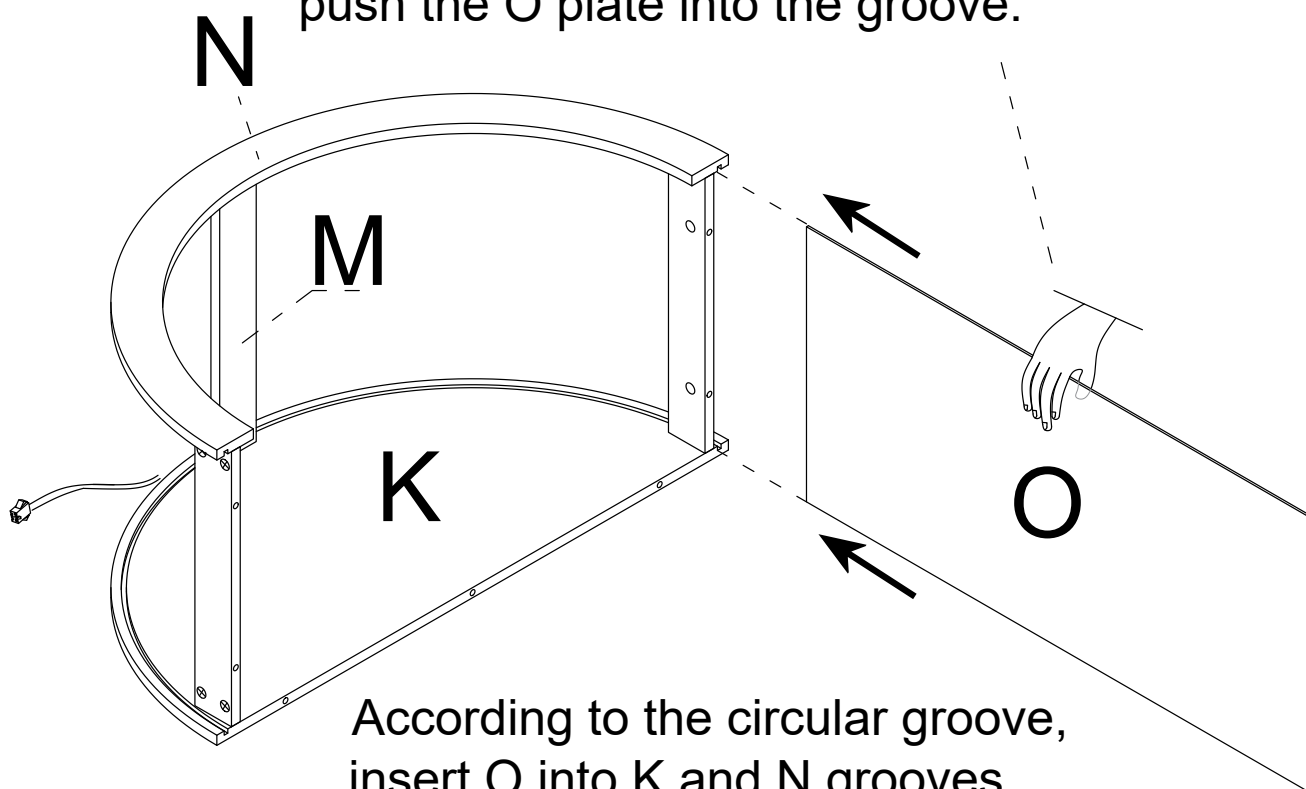


According to the circular groove,
insert O into K and N grooves.

Note:

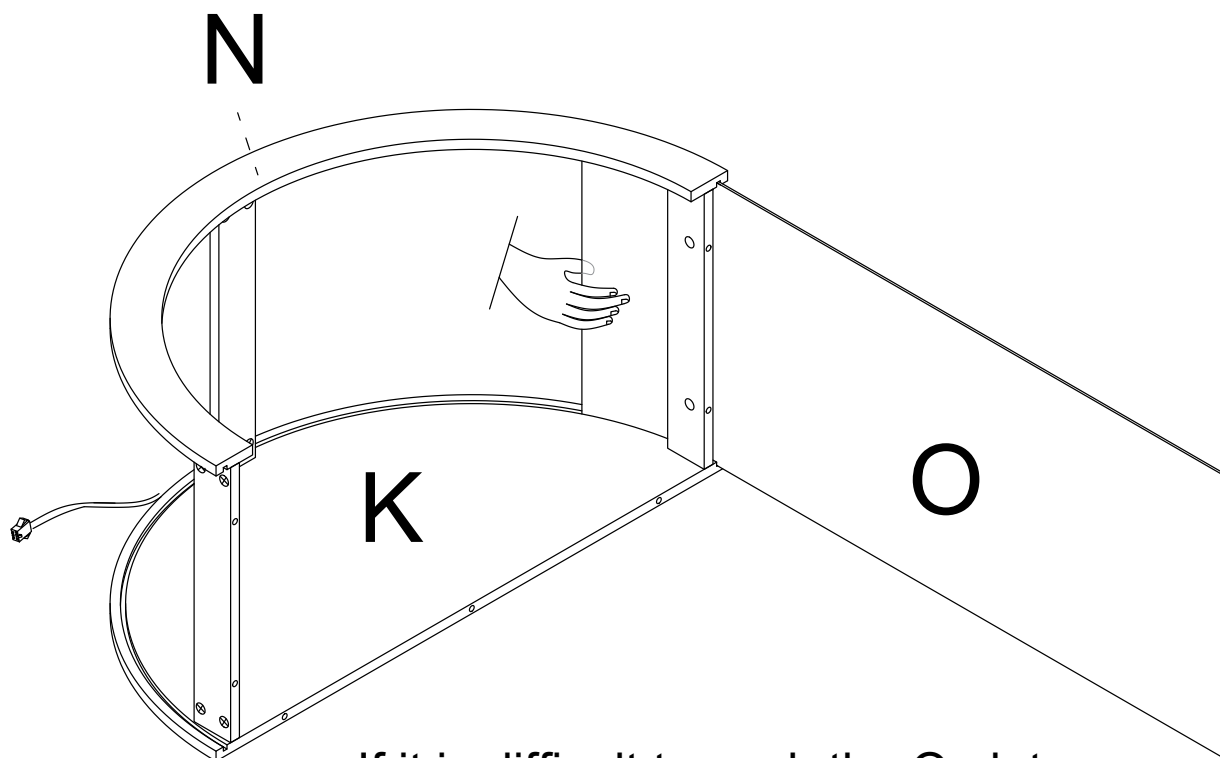


If it is difficult to push the O plate in, you can use the pull method.

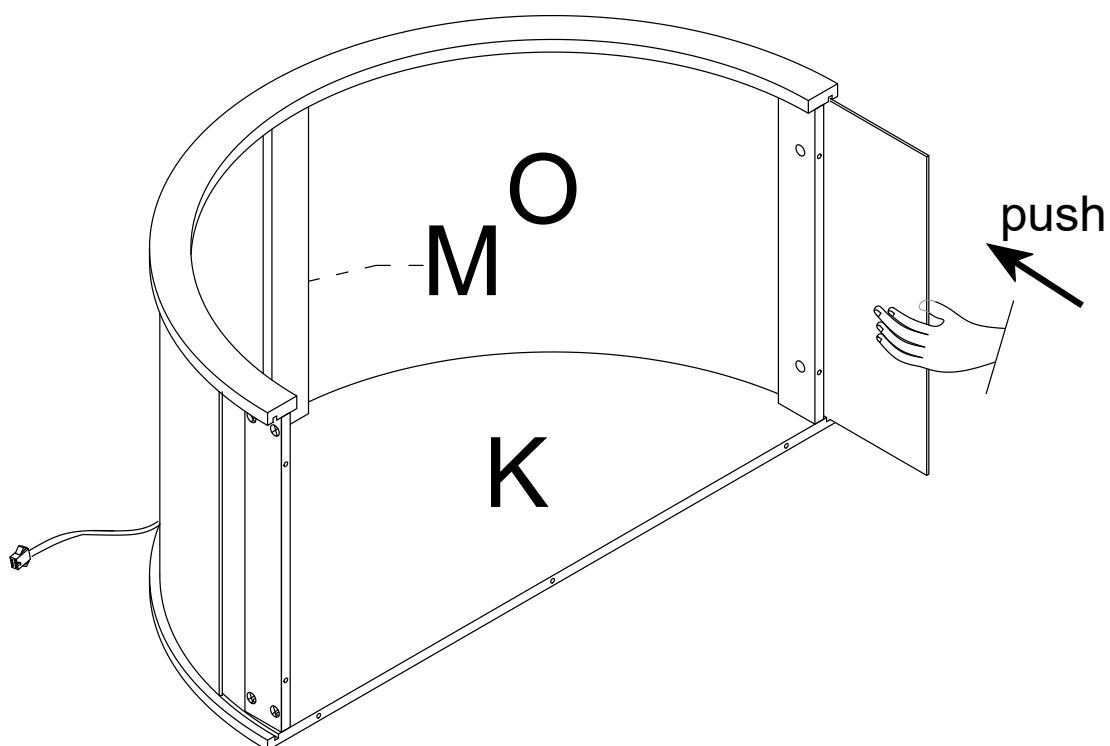


Step 25

1



x7

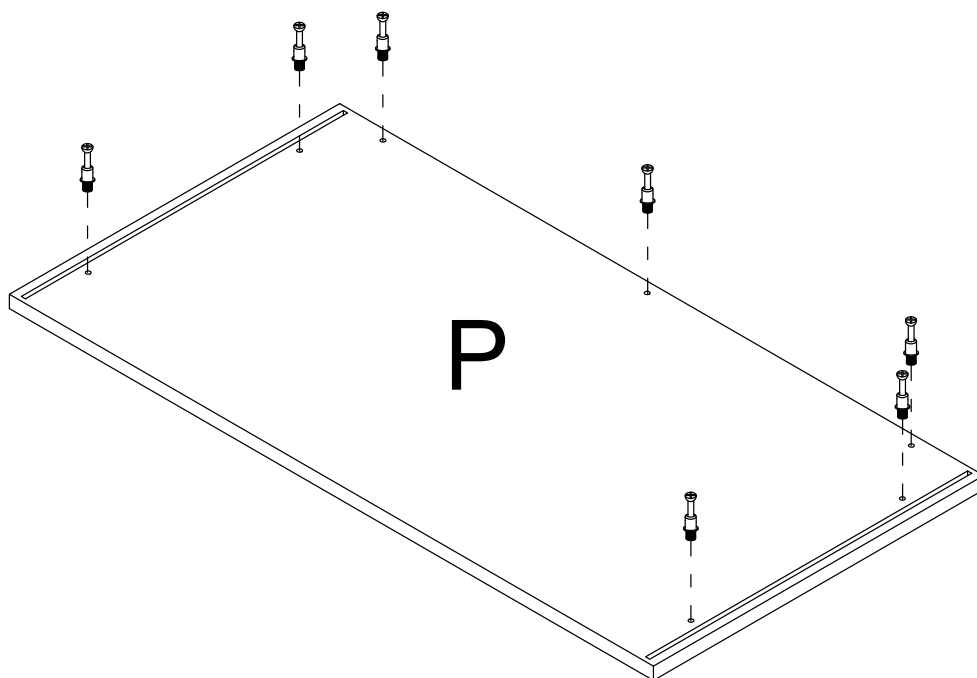


Step 26

2



x3

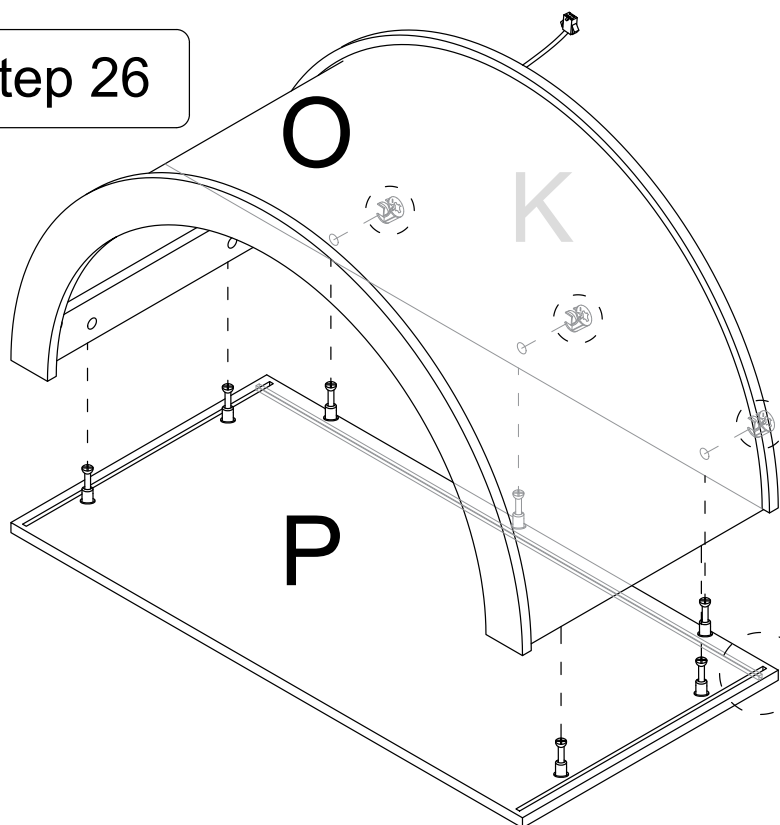

When installing the P plate, pay attention to the front and back, and there is a groove under the K plate.


Step 27

2



x4

Note: After installing the P board, you need to pat the backboards on both sides into the grooves of the P board by hand.

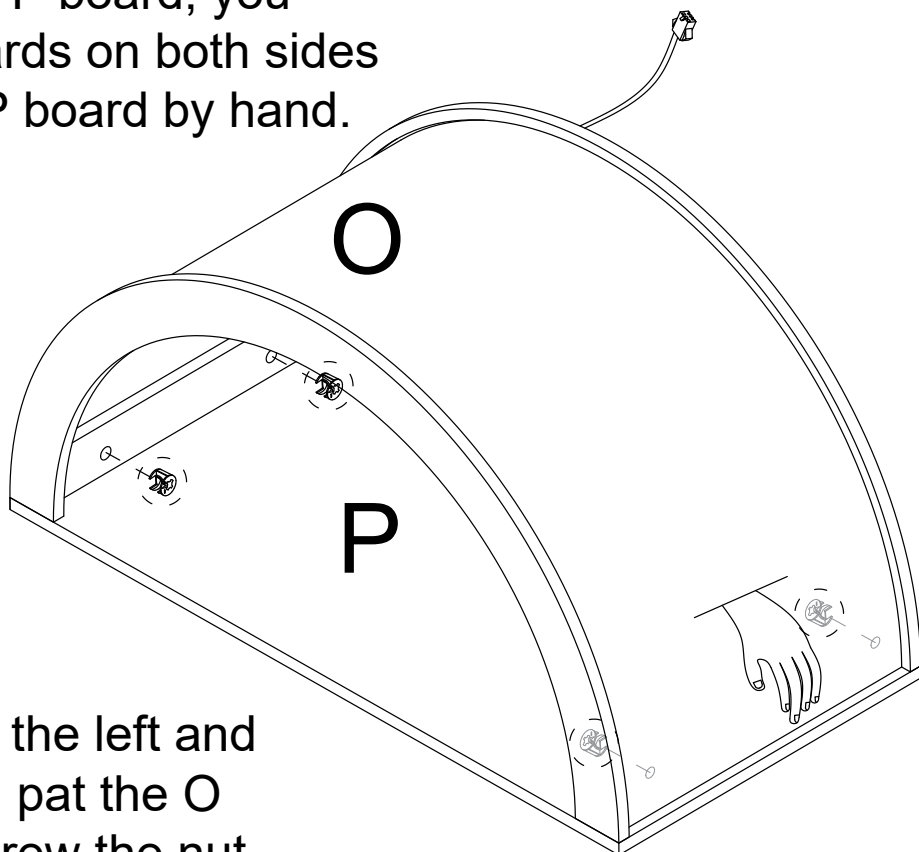


Note: pat the O plate on the left and then screw the nut, then pat the O plate on the right and screw the nut.

Step 28

6





x4



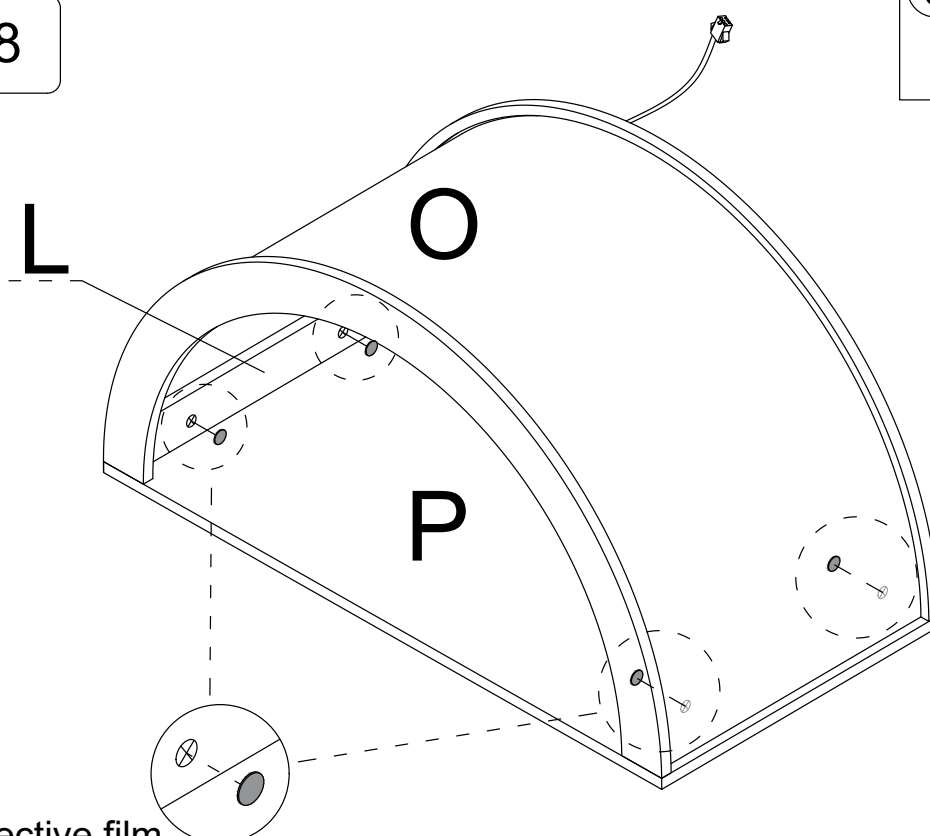


Tear off the protective film before installation

Step 29

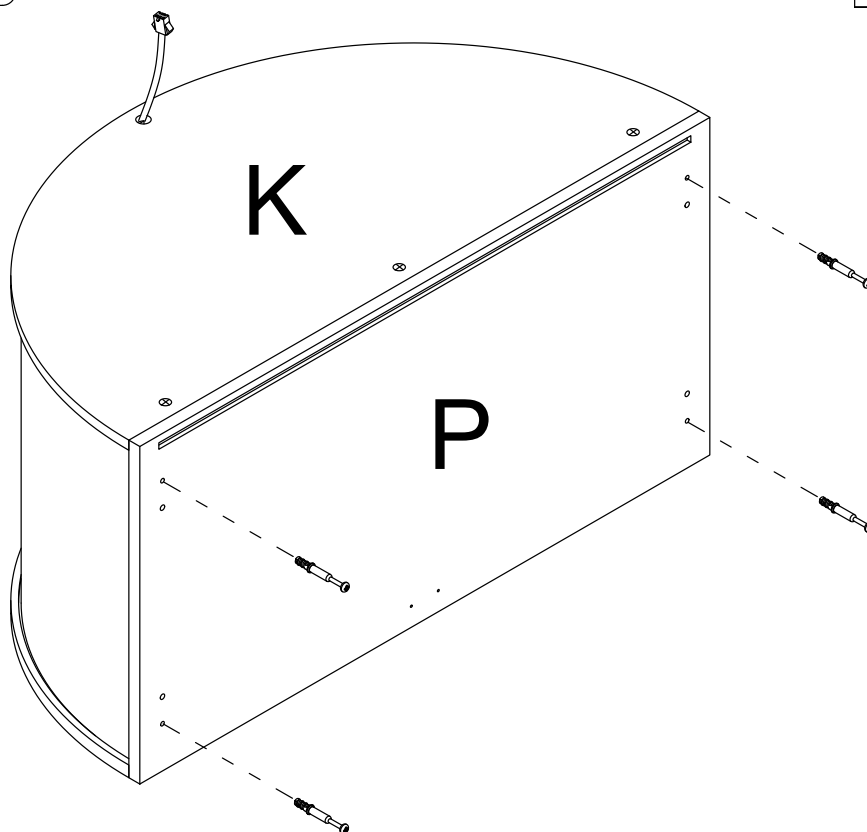

Step 30

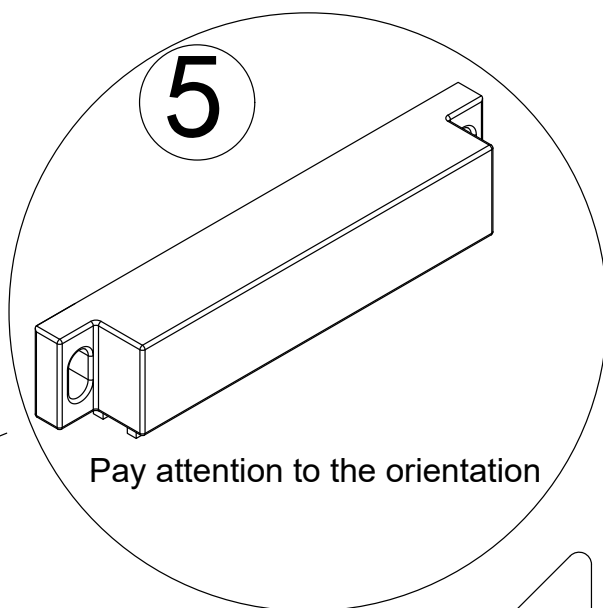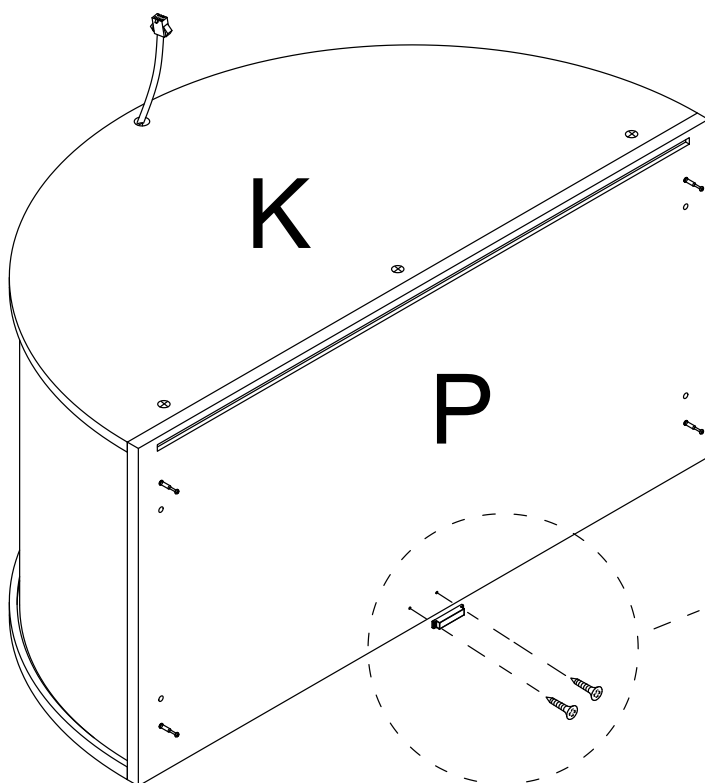


Step 31


2




x4

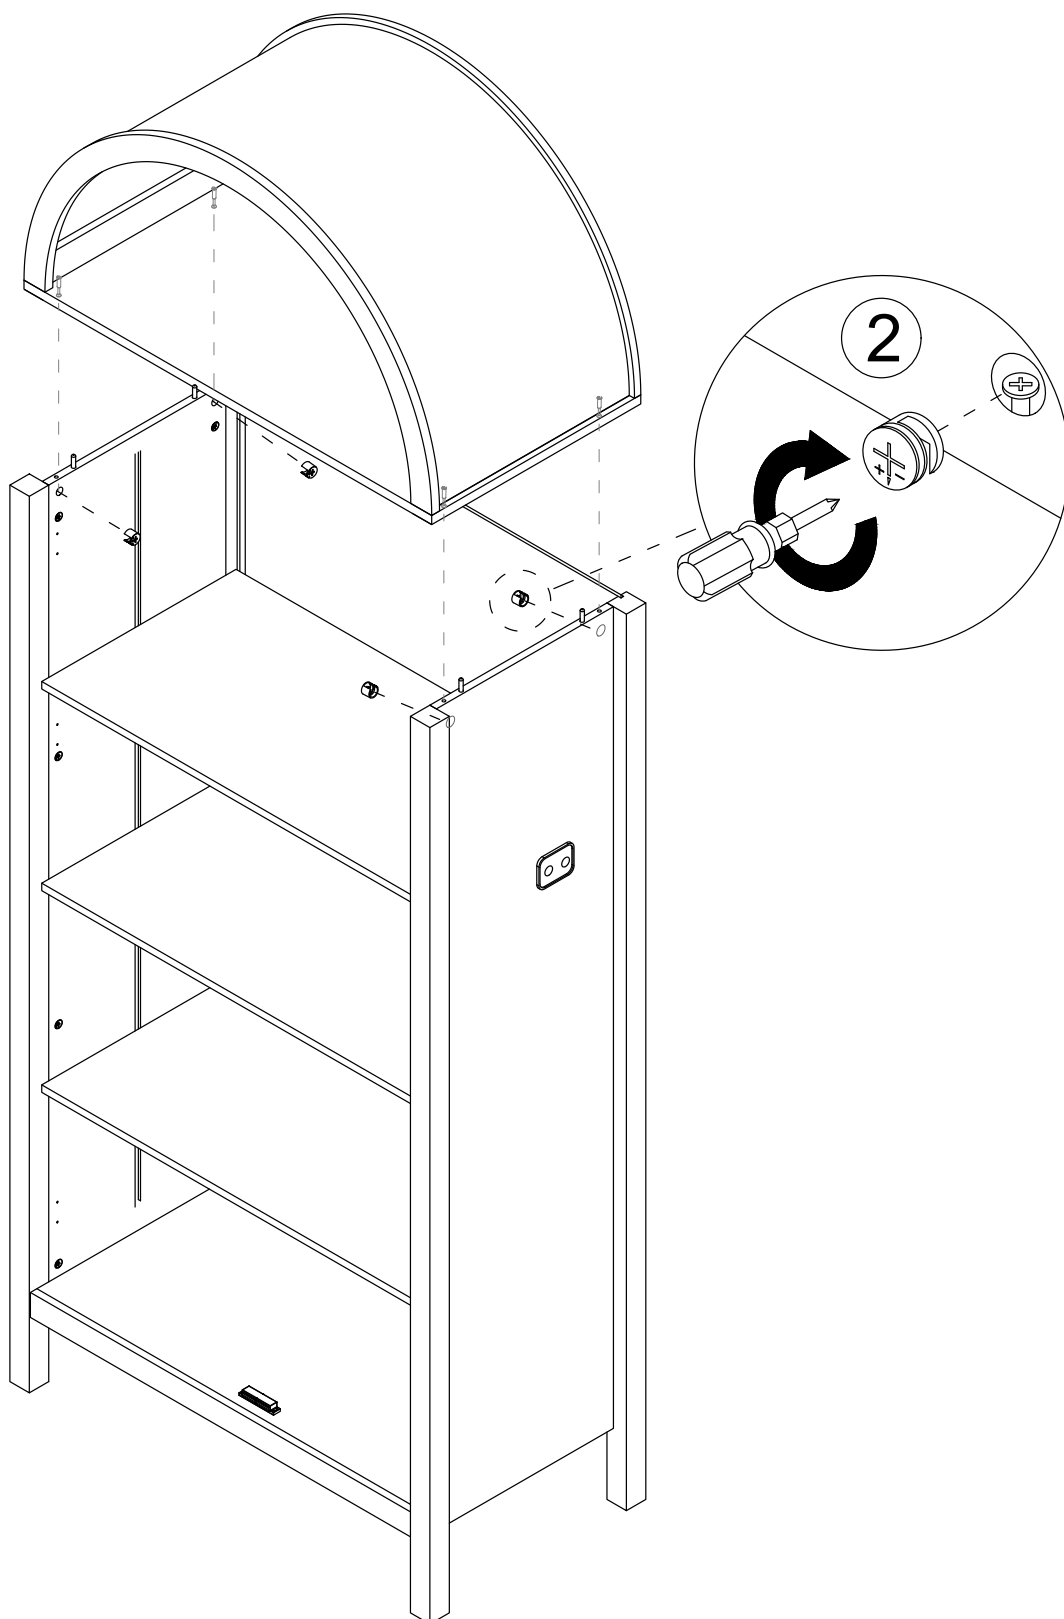



Step 32

- | | | |
|----|---|---|
| 8 |  |  |
| | x3 | x6 |
| 13 |  |  |
| | x2 | x2 |

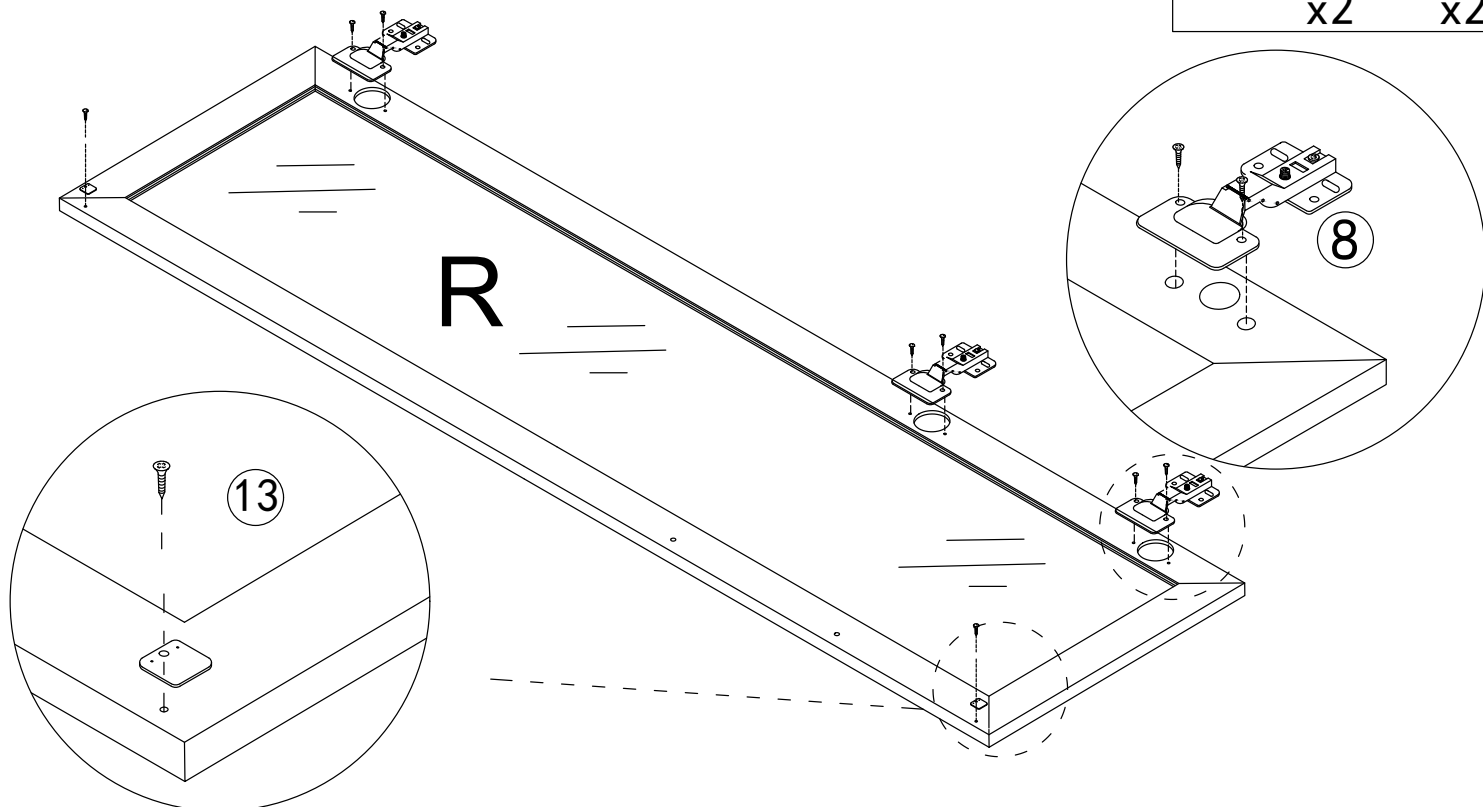

Step 33

- | | | |
|----|---|---|
| 8 |  |  |
| | x3 | x6 |
| 13 |  |  |
| | x2 | x2 |

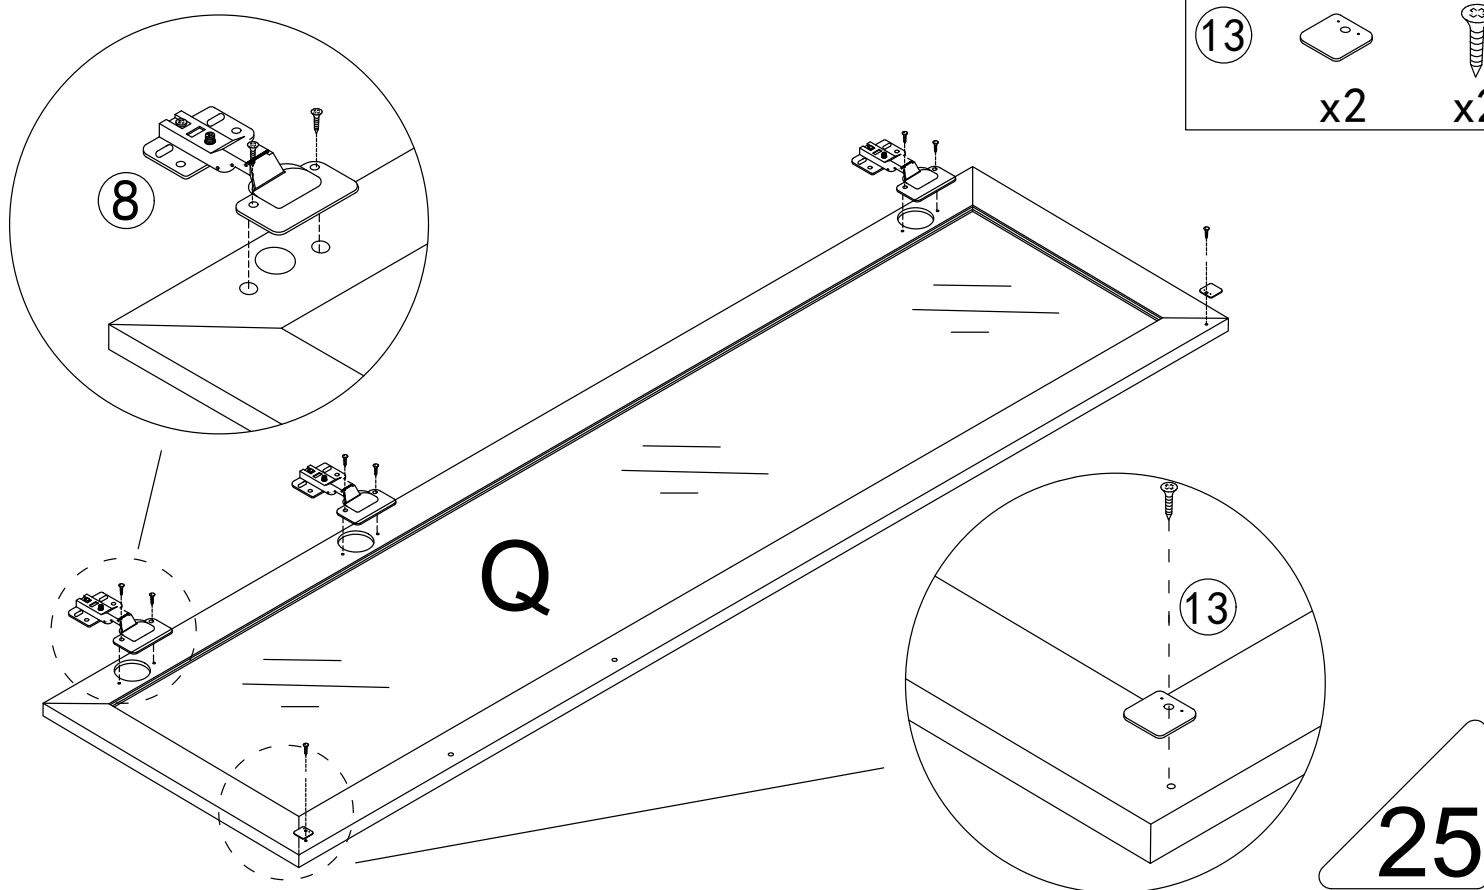


Step 34

Install the adjustment hole
of the door hinge first




⑧ x12

⑨ x1 x2

First




Second

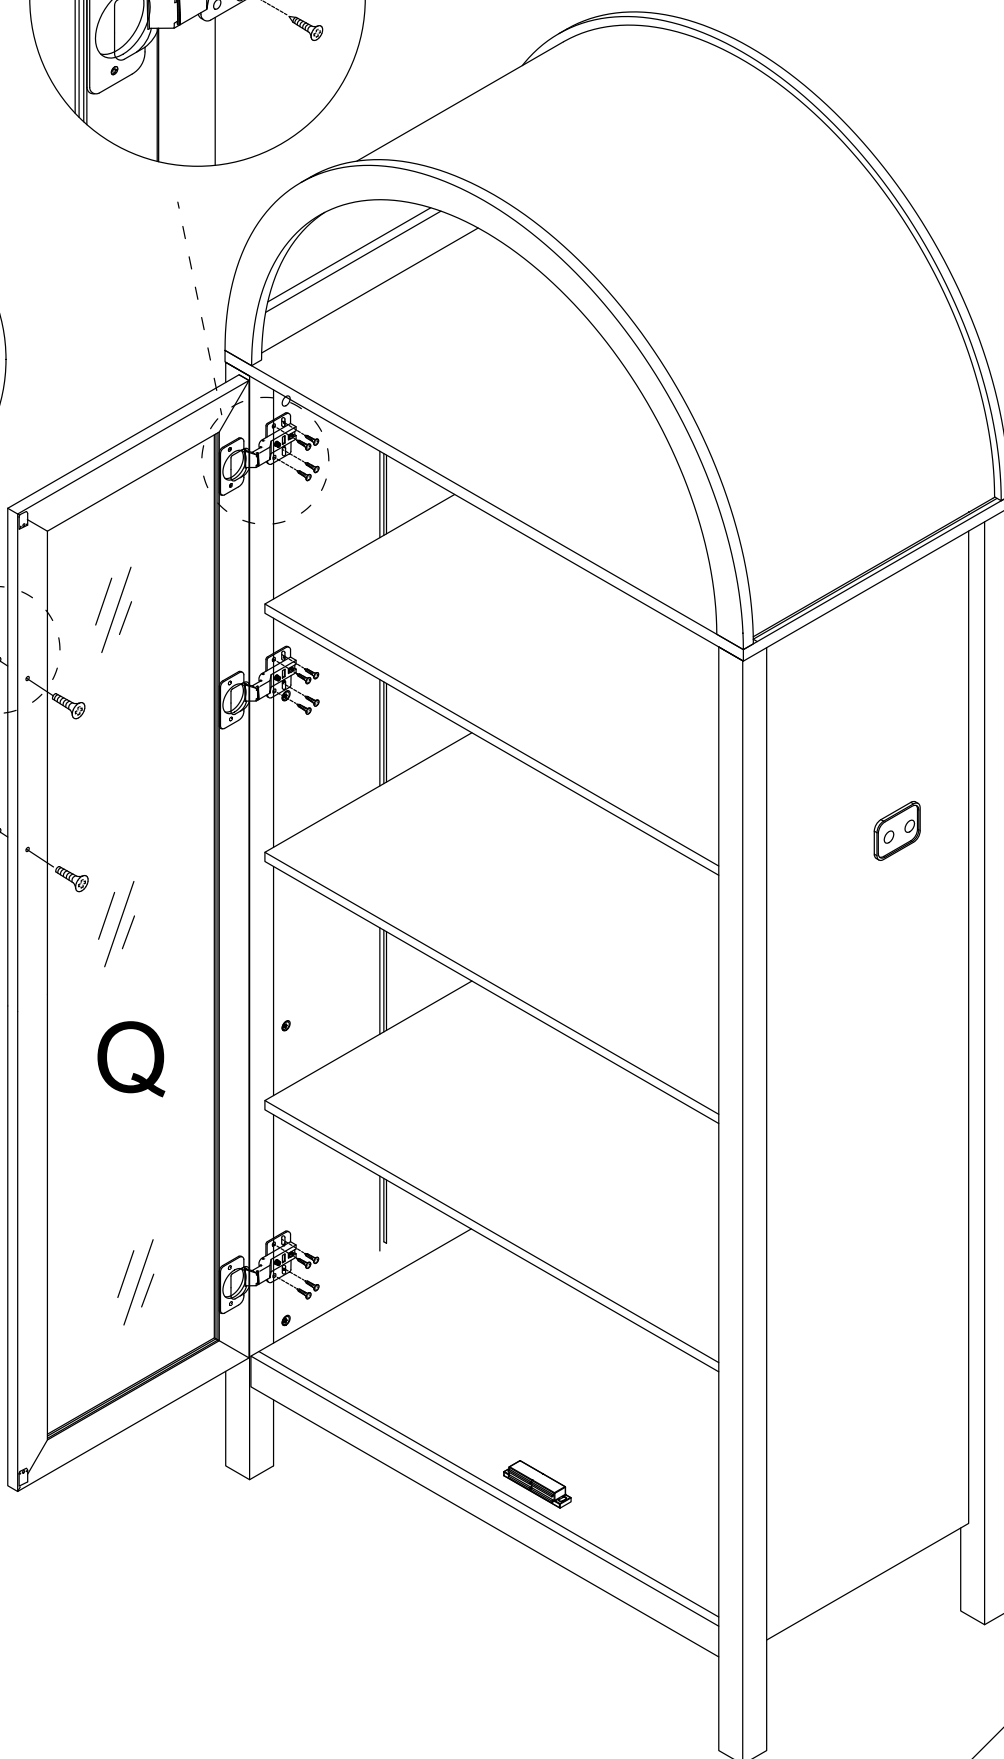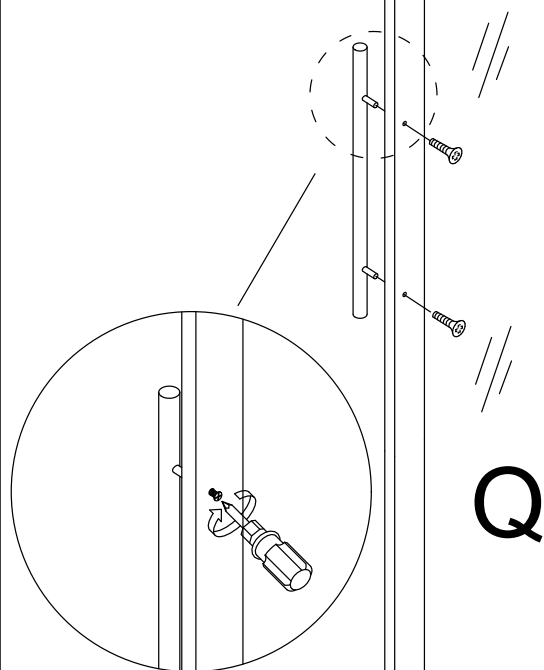


Step 35

8 x12



9 x1 x2

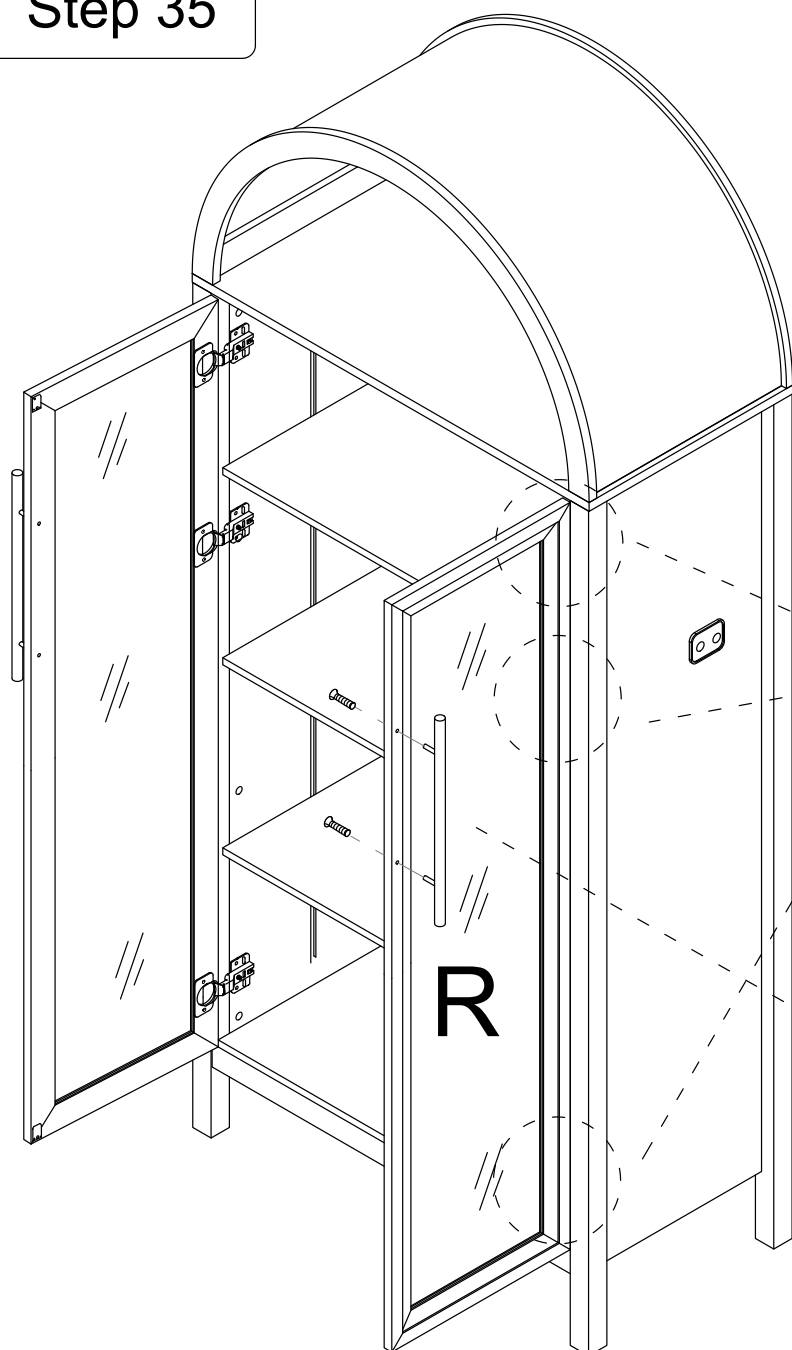


First



Second

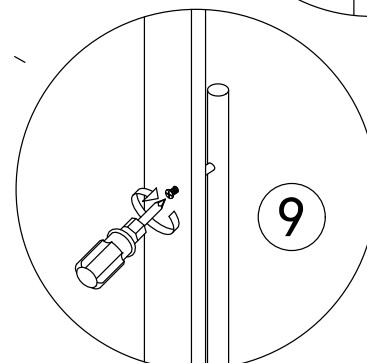

Turning this screw can effectively adjust the size of the door gap.

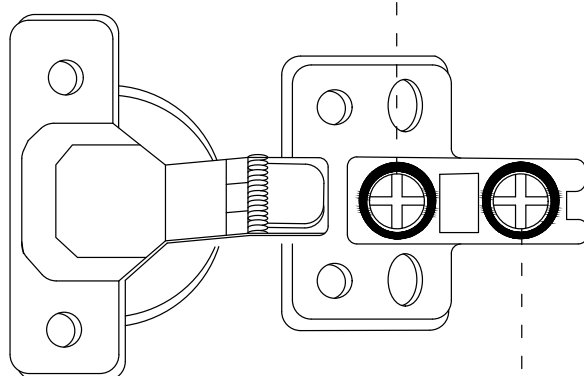

Turn this screw to adjust the door panel to be flat with the side panel.

Step 36



10



x8

10


x8

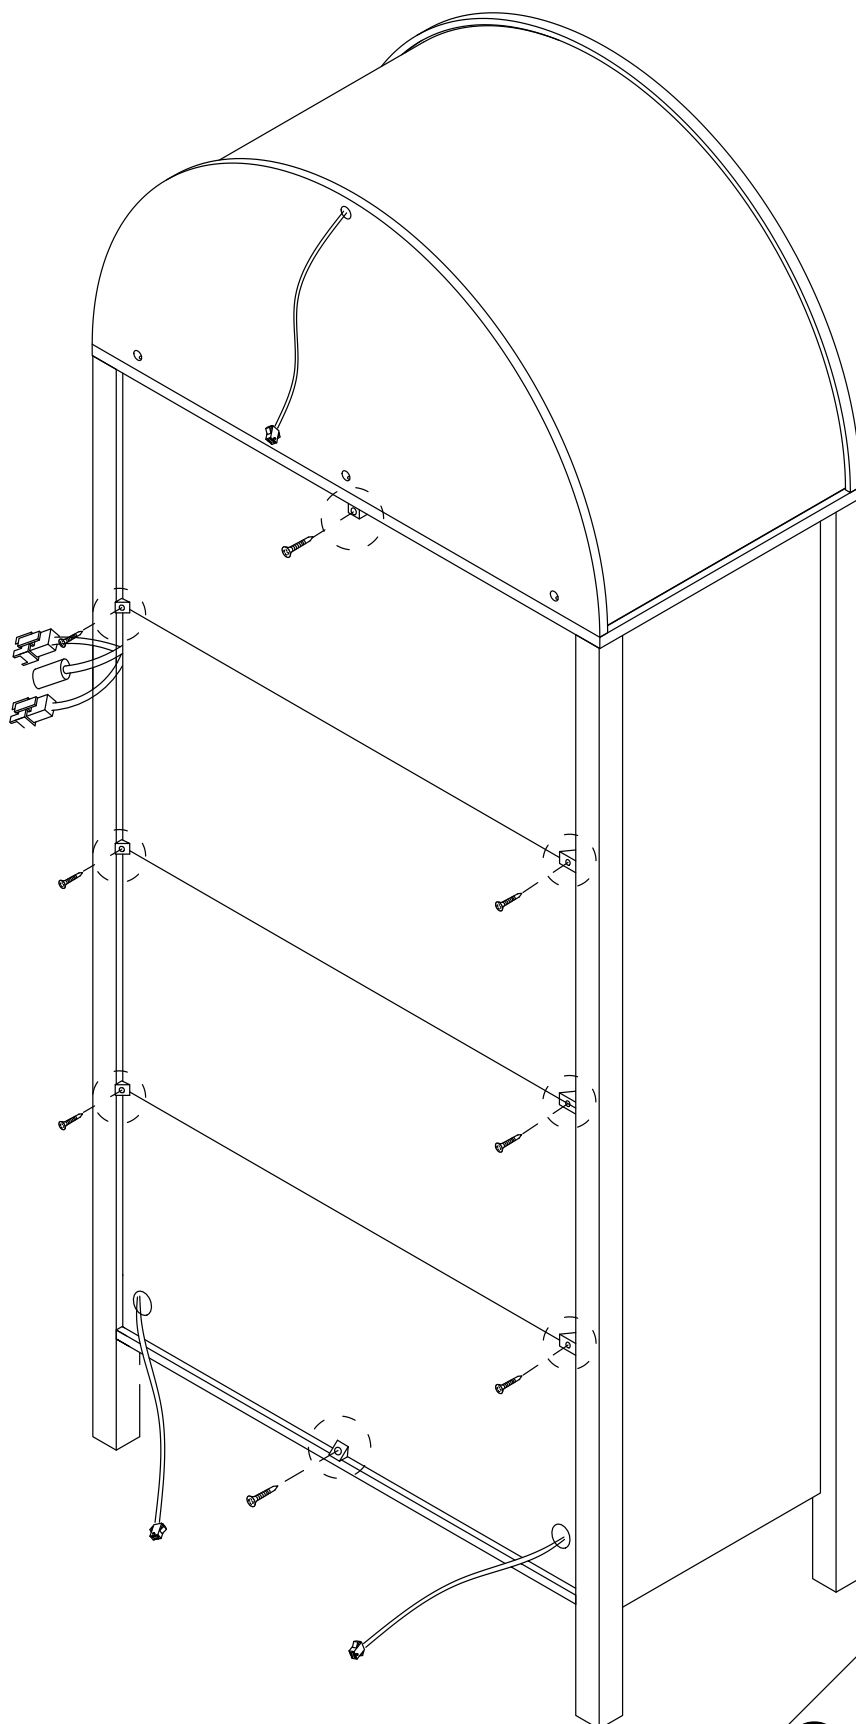




28

Step 37


11



x1

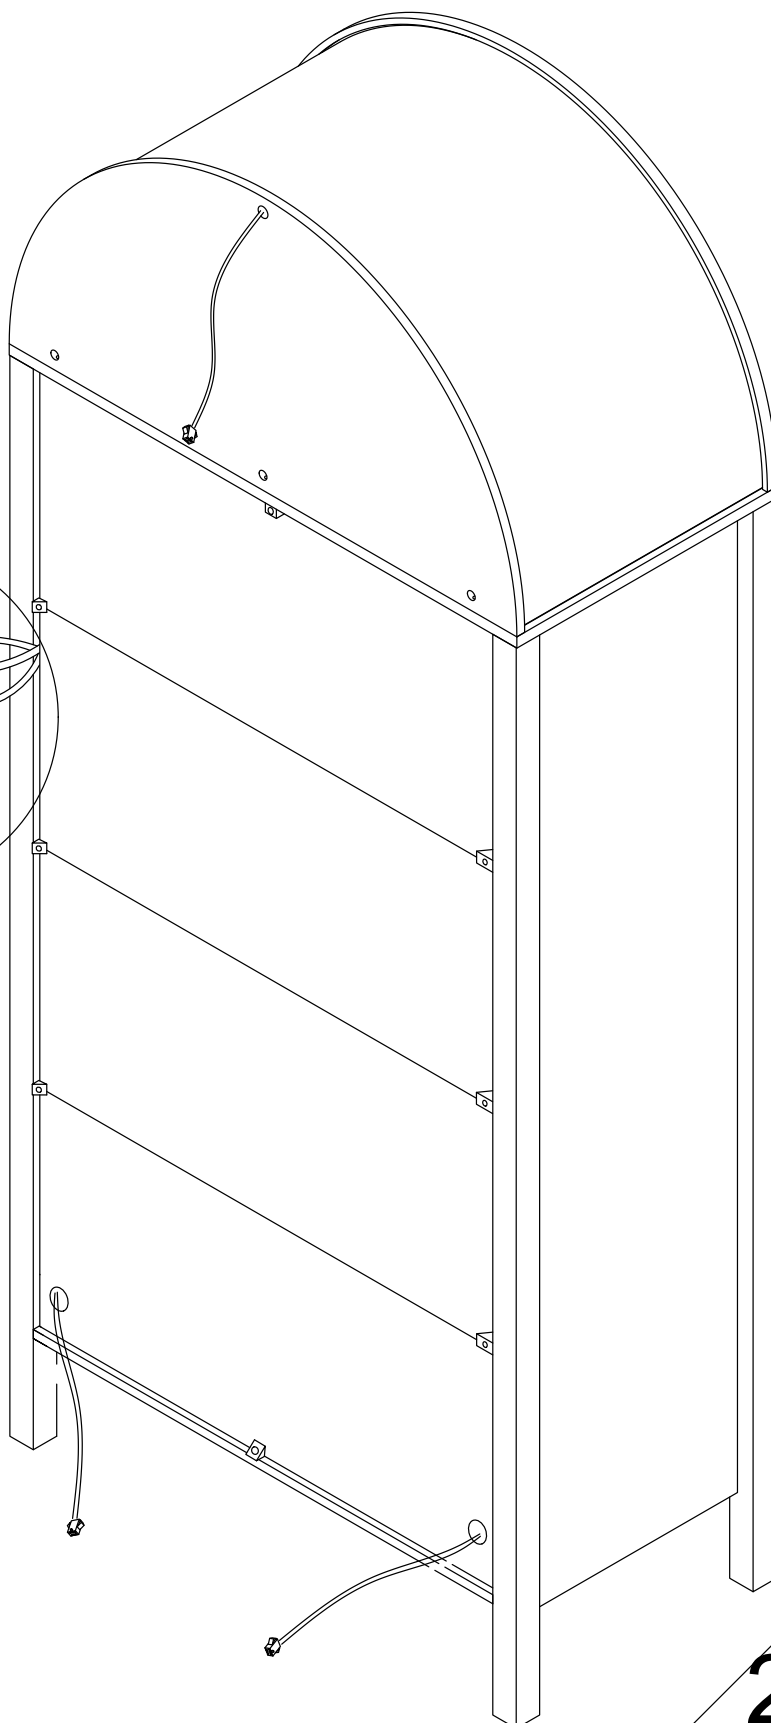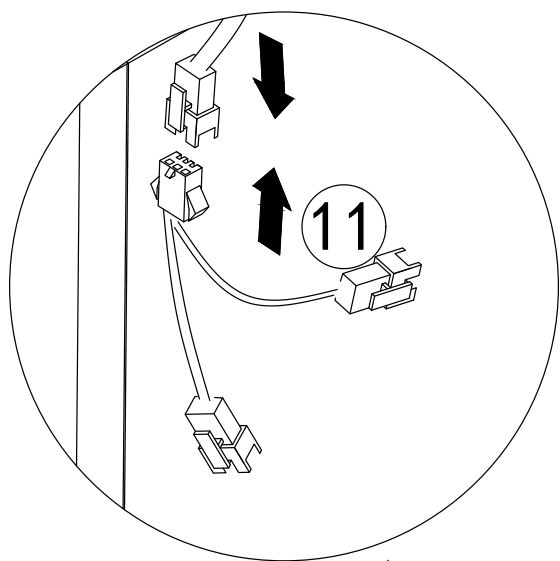

Step 38

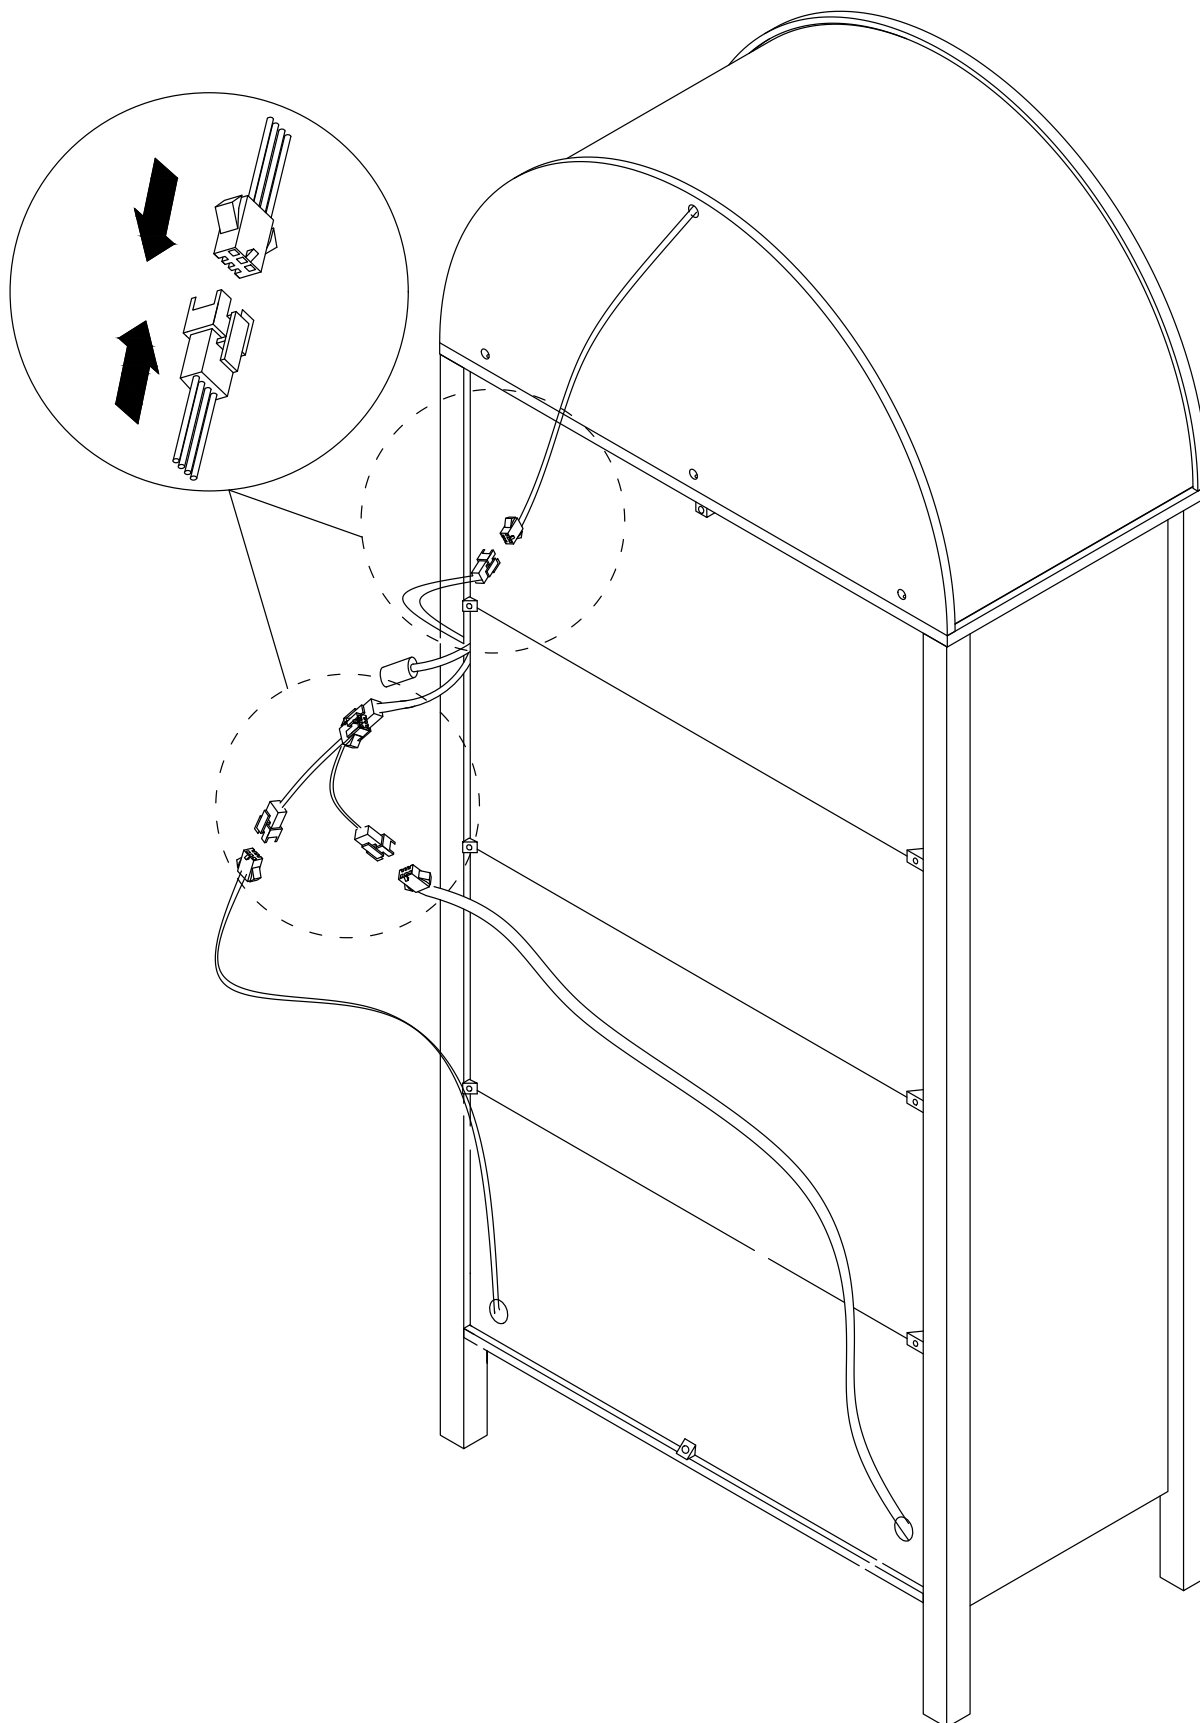

Step 39

12




1pcs




1pcs




1pcs

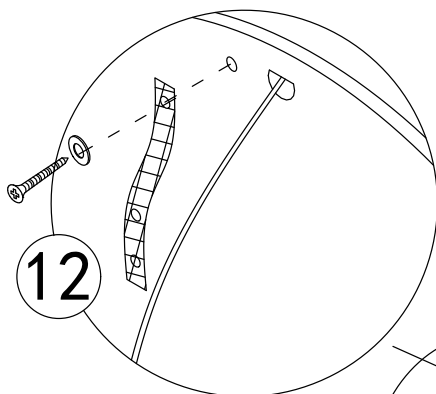

12




K


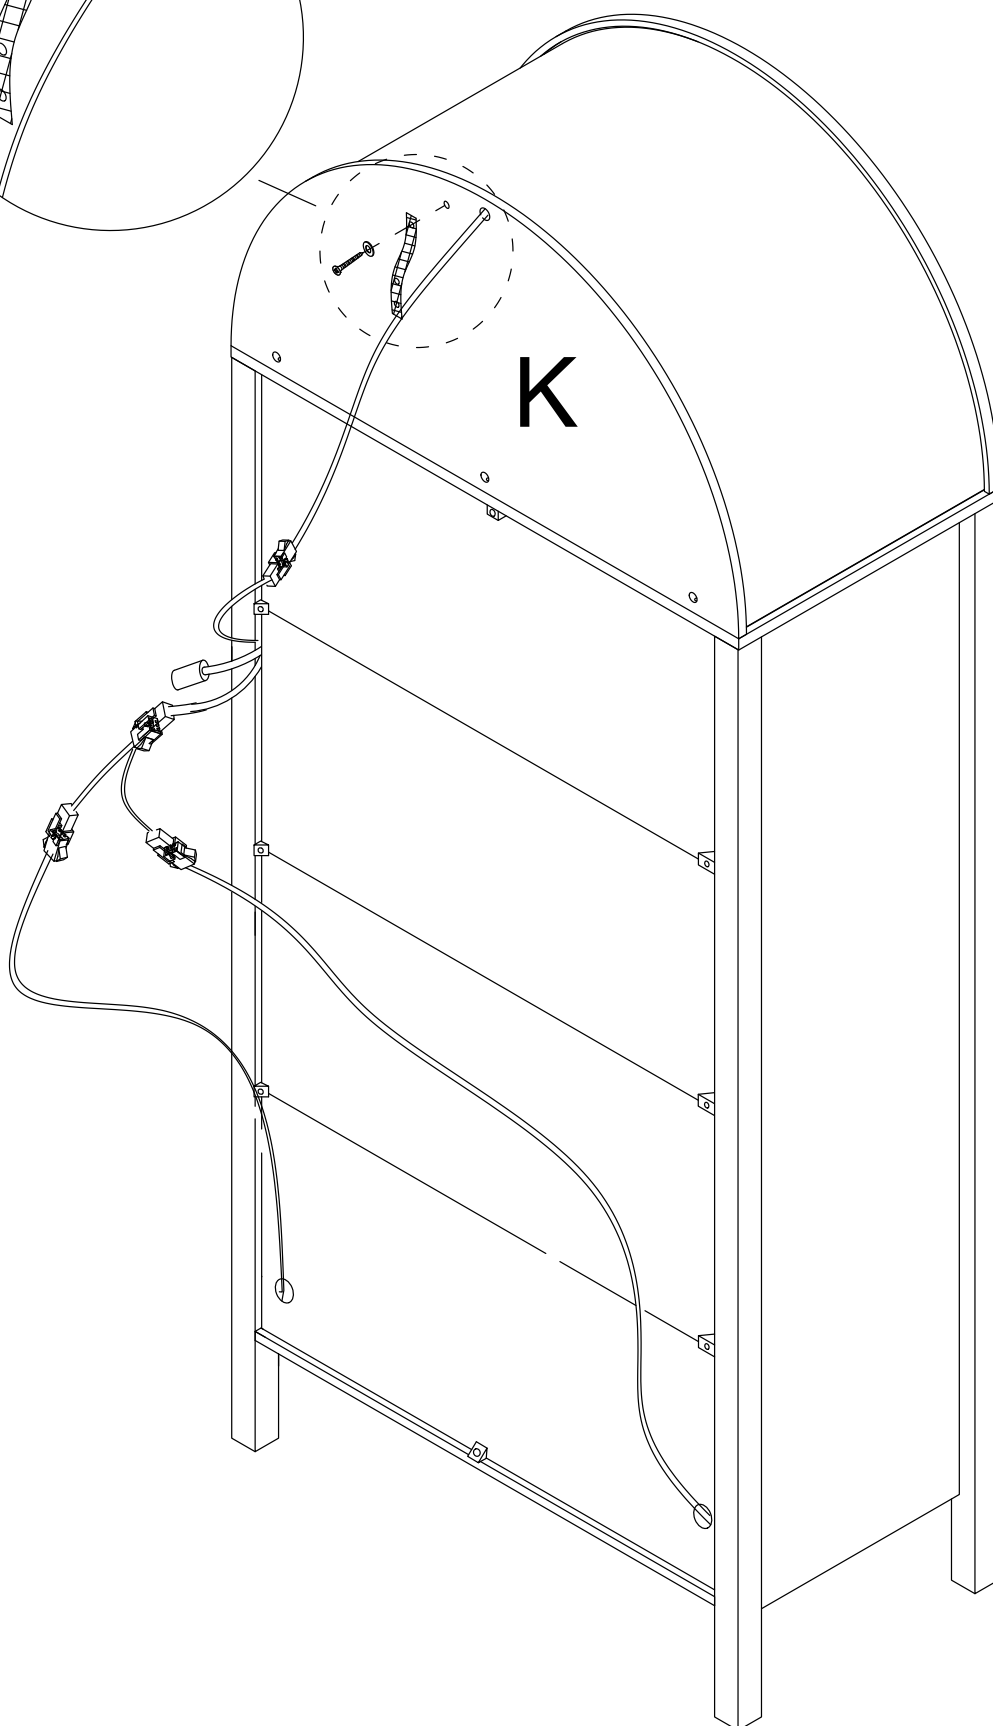


Step 40

14




x3

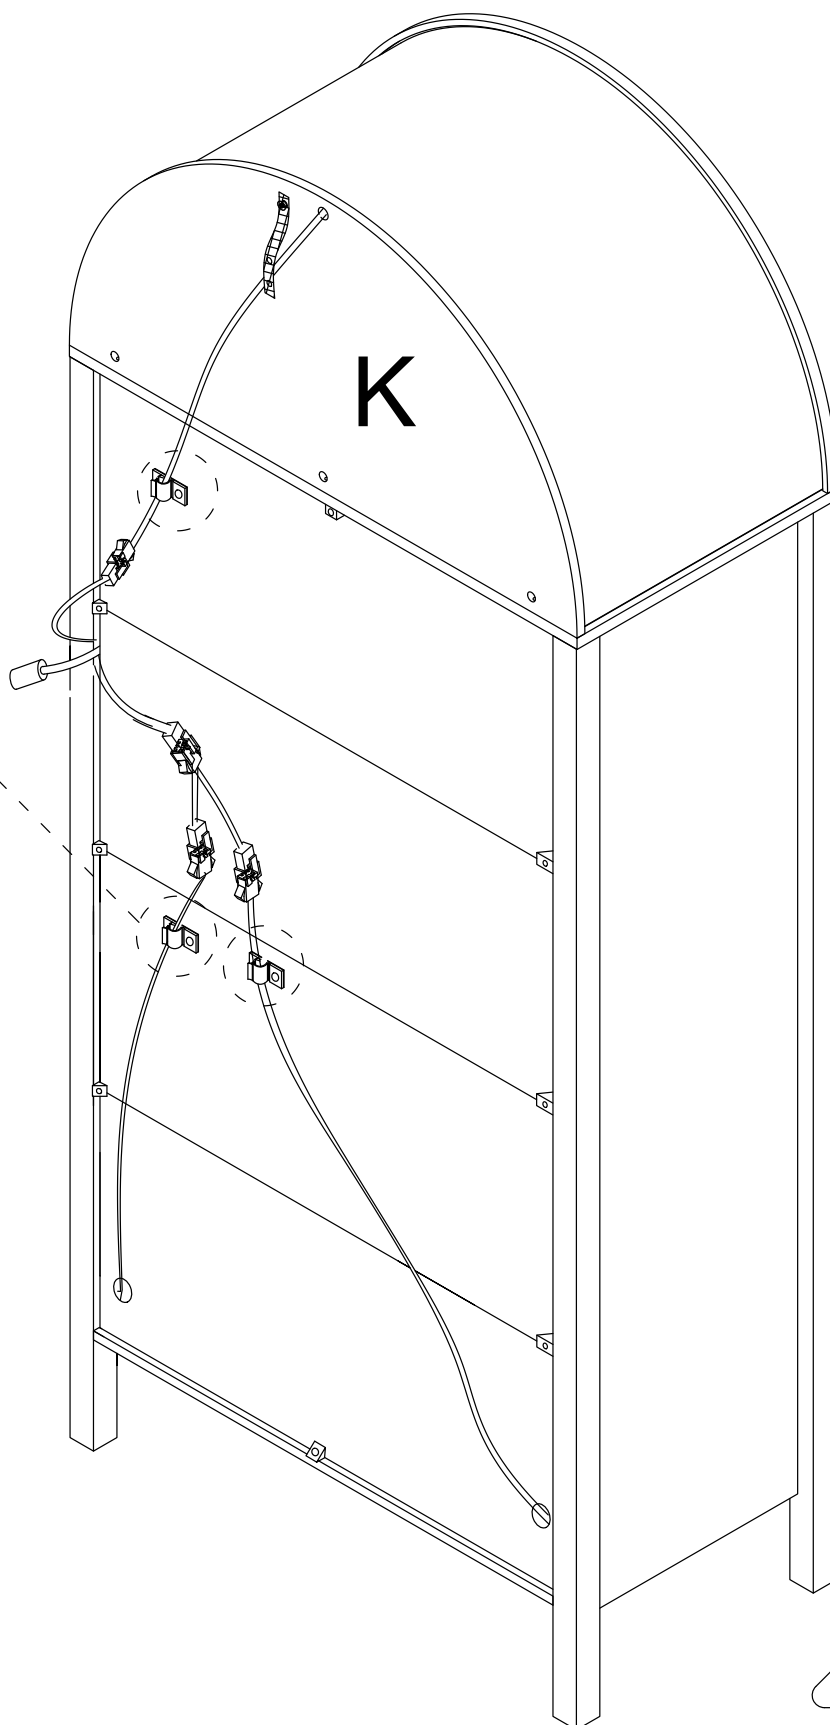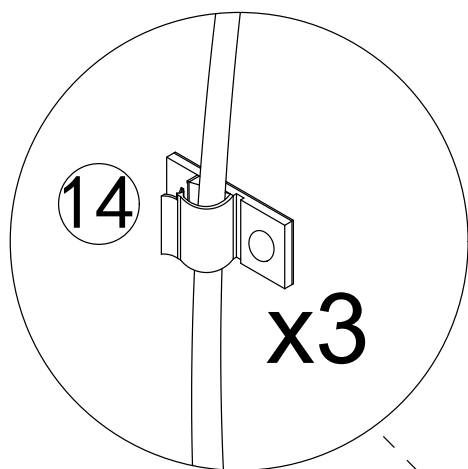

32


Step 41

15



x6


Use a hammer to drive the nail into the gap of the wooden board and fix the back board

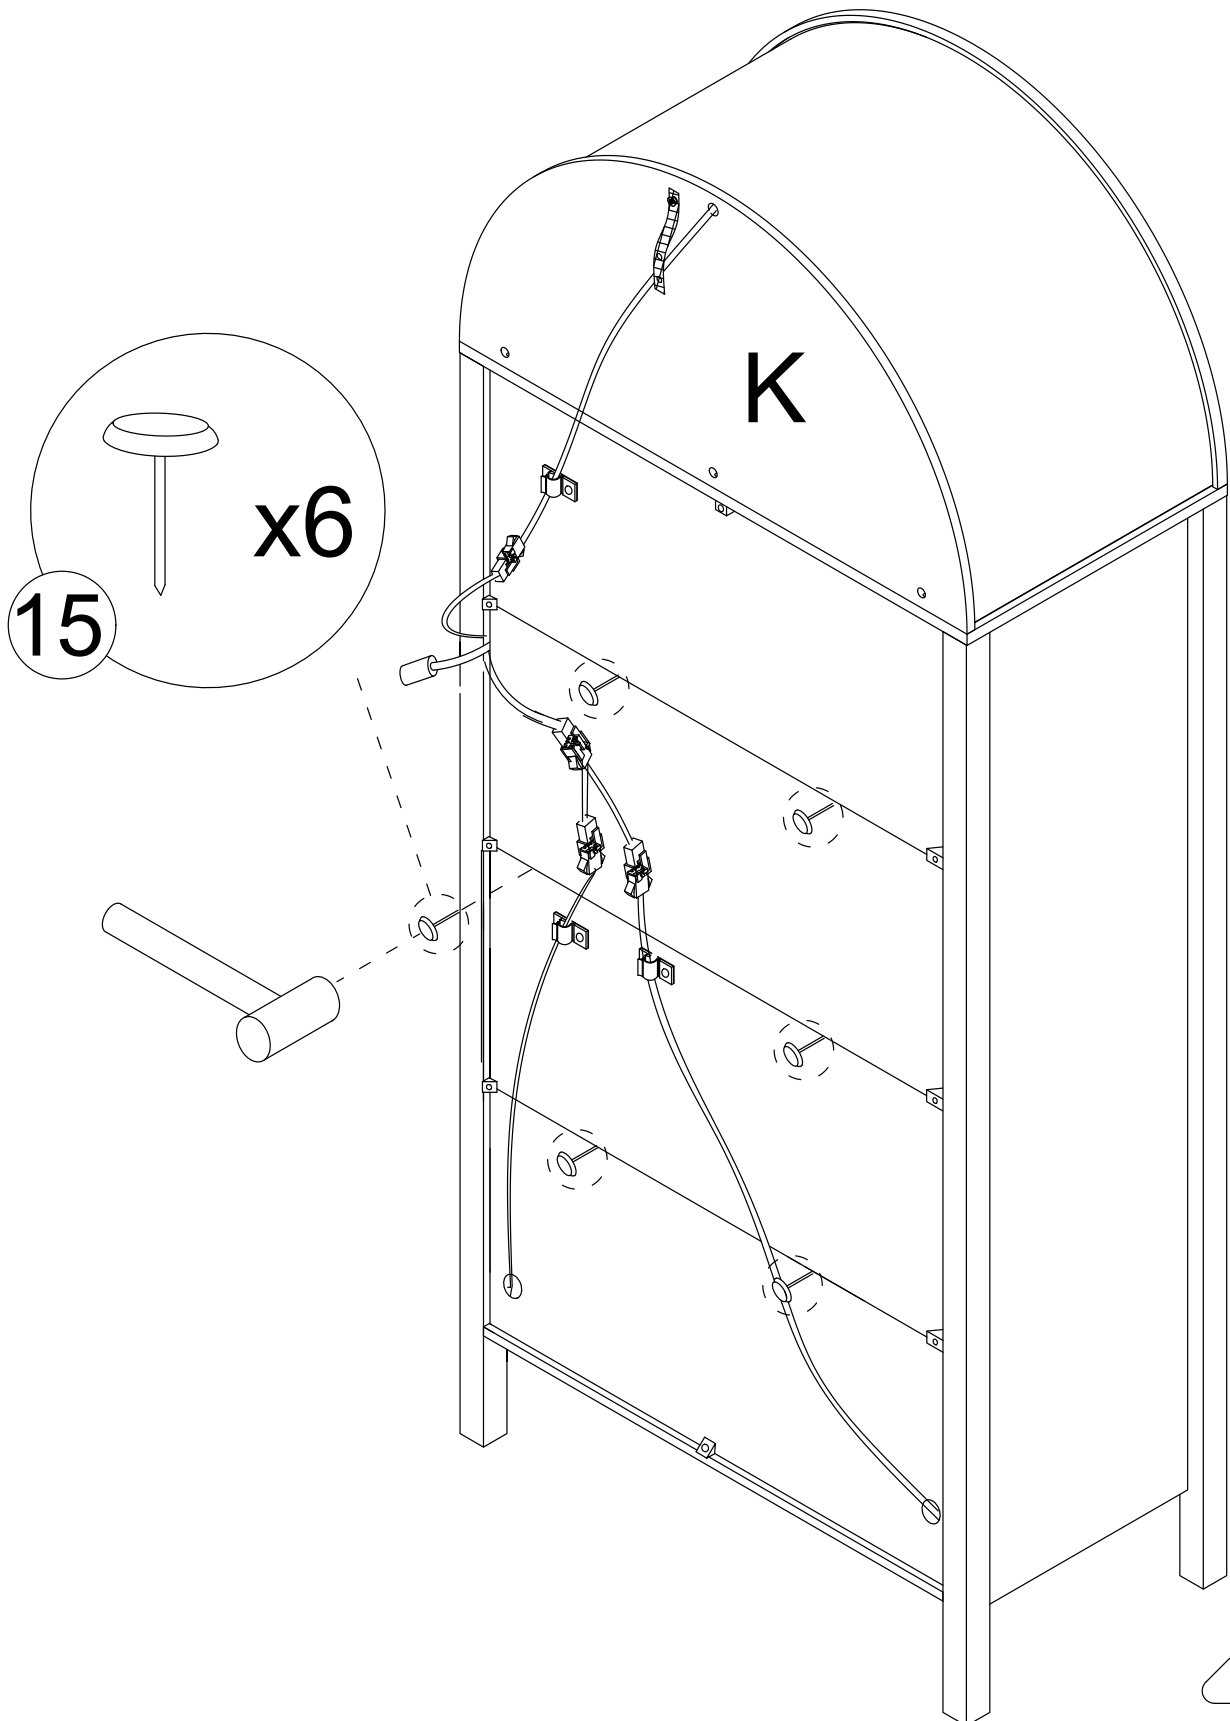


33

Step 42

use a ruler to measure the approximate height of the product on the wall, and then mark it with a pencil.

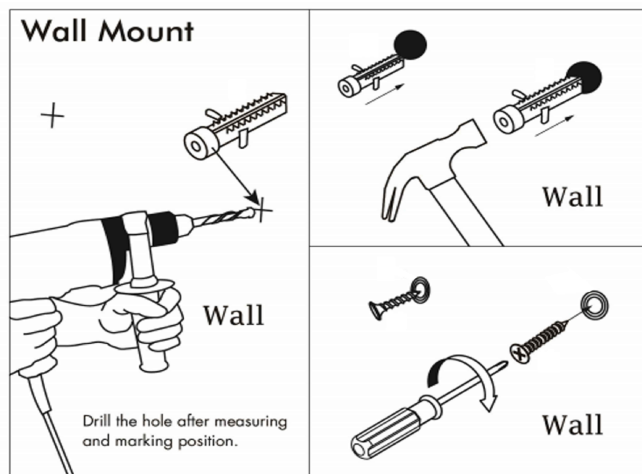



Use a tape drill to make holes in the wall that are suitable for the product screws.

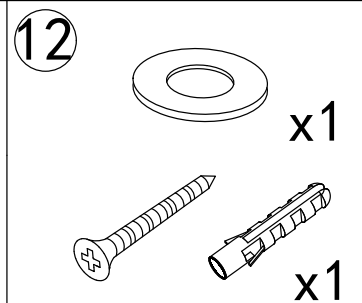


Put the expansion bolt into the hole.

Pass the matching screws through the "anti-rewind" and tighten them to fix them on the wall.

wall



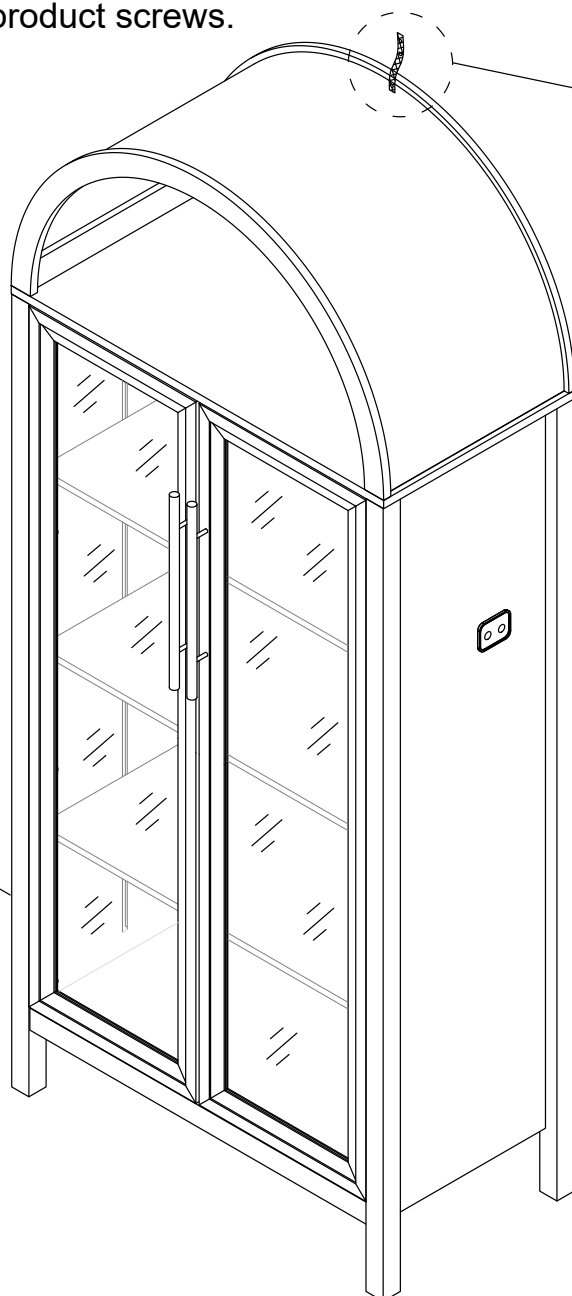


Step 41



x1

wall

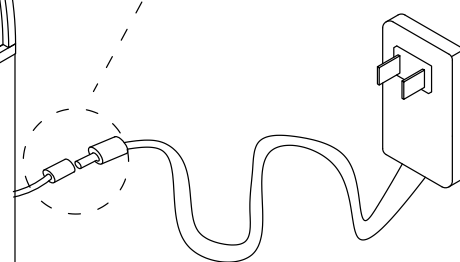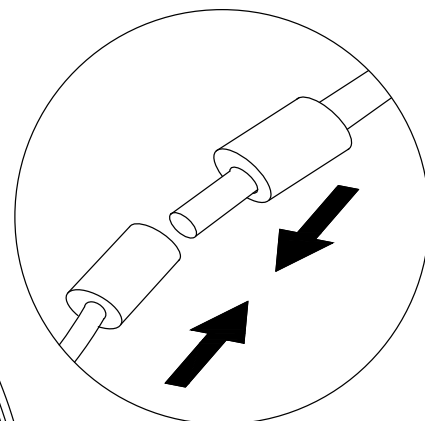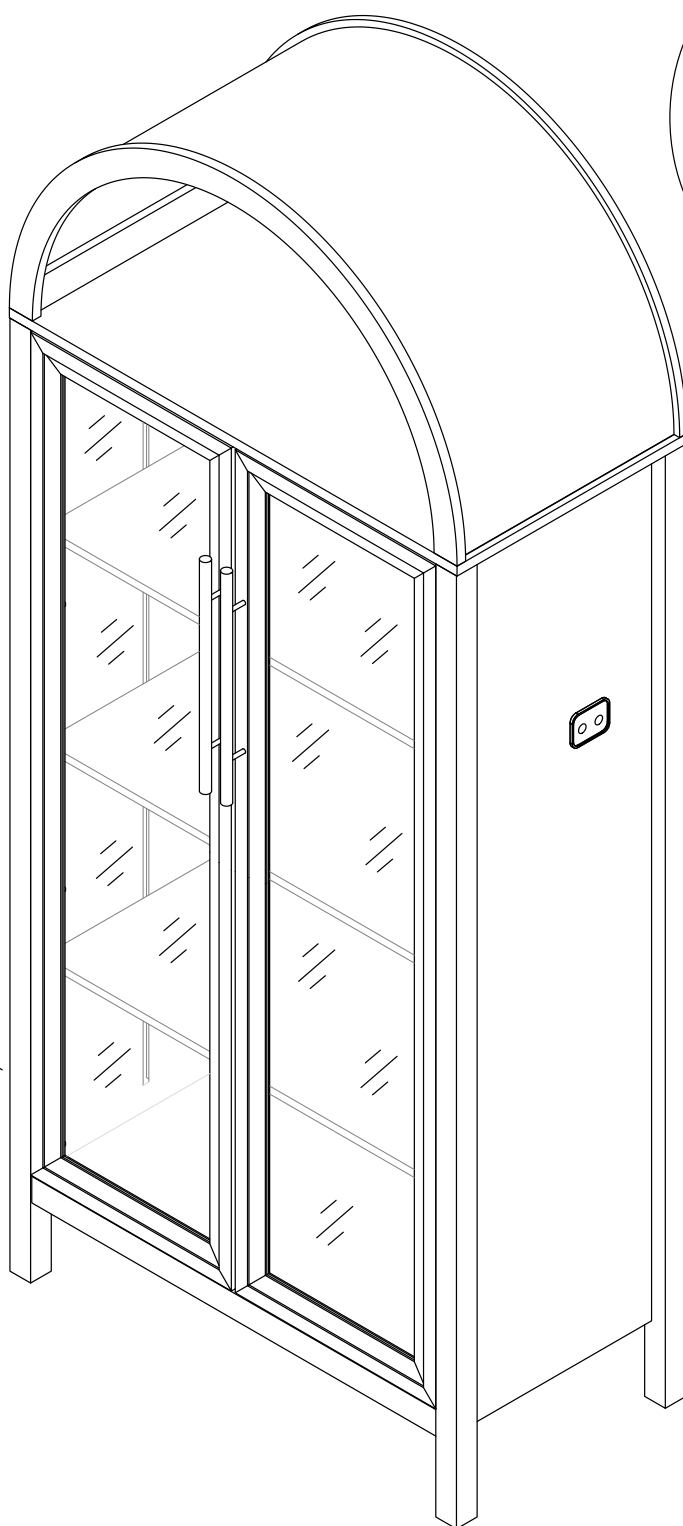

wall


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

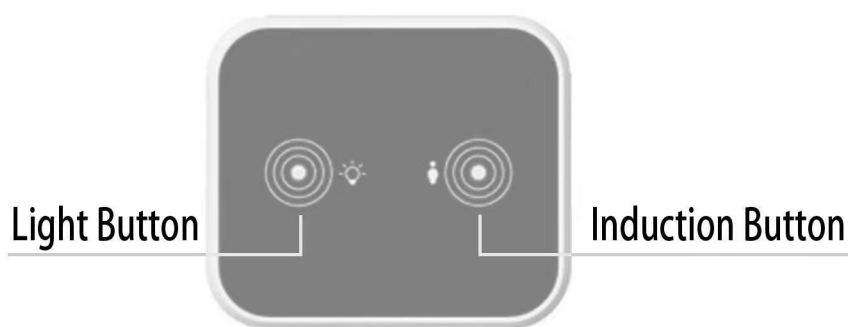

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.