


PREMIUM WHIRLPOOL K-1111-VLN

Features

- Acrylic
- 6 Flexjets™
- 8 effervescent ports
- 4 chromatherapy lights
- Two pillows
- Two variable speed pumps with two 1.5 kW heaters
- Two back-lit user controls
- Two remote controls
- 20 color-matched sequencing Bodyssage™ backjets
- For drop-in or undermount installation in a corner or island
- 69-1/4" (1759 mm) x 69-1/4" (1759 mm) x 24" (610 mm)

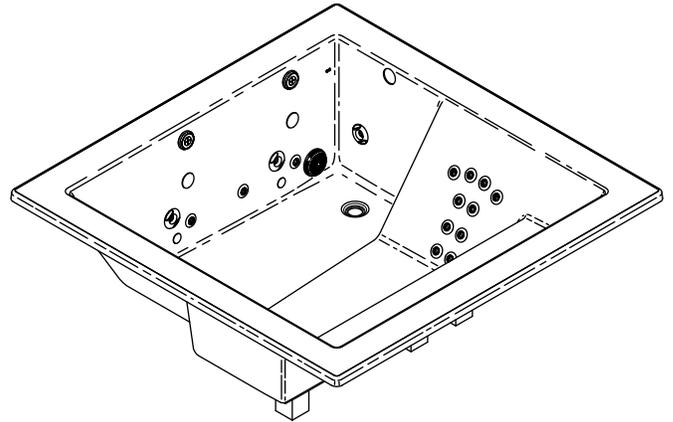

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-1111-VLN	Premium whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-9696	Trim kit – metal finishes	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessories				
K-7167	Adjustable pop-up high volume drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-588	Undermount kit	<input type="checkbox"/> NA		
K-1601	Footstop		<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The acrylic premium whirlpool shall be 69-1/4" (1759 mm) in length, 69-1/4" (1759 mm) in width, and 24" (610 mm) in height. Product shall be for drop-in or undermount installation in a corner or island. Product shall have two variable speed pumps with two 1.5 kW heaters and two back-lit user controls. Product shall feature 20 color-matched sequencing Bodyssage™ backjets, 6 Flexjets, 8 effervescence ports, and 4 chromatherapy lights. Product shall include two pillows and two remote controls. Premium whirlpool shall be Kohler Model K-1111-VLN-_____.

CONSONANCE®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	45" (1143 mm) x 43" (1092 mm)
Basin area, top	57" (1448 mm) x 57" (1448 mm)
Weight	340 lbs (154.2 kg)
To overflow:	
Water depth	19-1/2" (495 mm)
Capacity	170 gal (643.5 L)
* Approximate measurements for comparison only.	

Drop-in cutout dimensions:	
68" (1727 mm) x 68" (1727 mm)	

Pump: (Qty. 2)	Heater	V	Hz	A
	1.5 kW	220/240	50/60	15

Minimum access panel pump/control:	
34" (864 mm) W x 15" (381 mm) H	three required

Required Electrical Service (2 required)

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control/heater	220/240 V, 20 A, 50/60 Hz
Pump/control/heater	220/240 V, 20 A, 50/60 Hz

Installation Notes

Install this product according to the installation guide.


Two separate 240 V electrical services required; one for each of pump/control/heater.

Floor support under this product must provide for a minimum of 54 lbs/square foot (262 kg/square meter) loading.

For undermount installations, use undermount kit K-588-NA.

Hot water supply should be 70% of capacity or greater. Installations will vary.


If installing a rim-mount faucet, make sure there is no interference with drain overflow and the circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

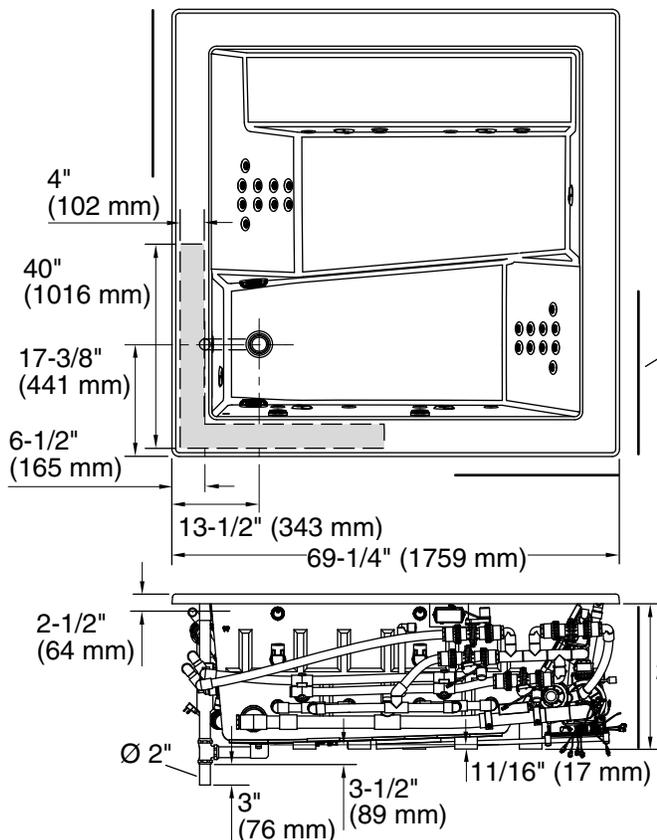

No change in measurements with drain shown. (K-7167-AF or K-7167M-AF)

Recommended faucet area.

Pump/Control Access
34" (864 mm) W x
15" (381 mm) H Min (3 required)

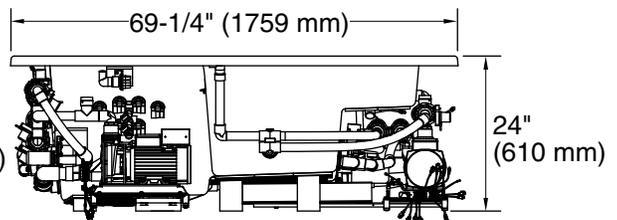

Product Diagram