
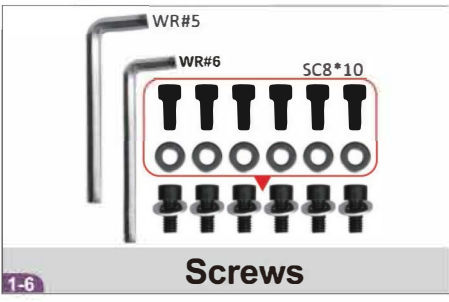
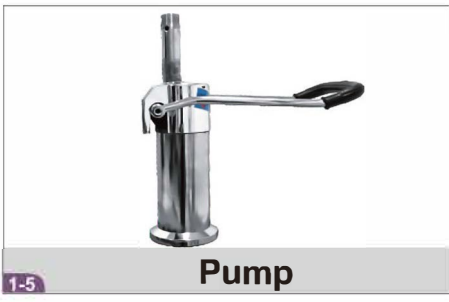


Installation Instructions

1. Parts Included

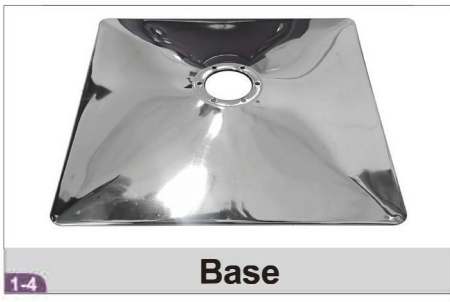


2. Installation Instructions

Please note that the top seat could be heavy, 2 people are recommended for the installation.

Step 1. Install the backrest

Parts you will need for this step.

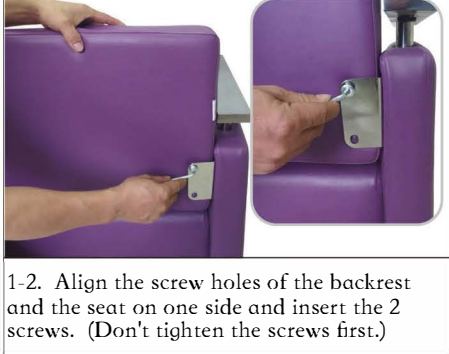


Note: Each chair is pre-installed for a thorough inspection before shipping, so there are usually no installation problems. Please do not tighten the screws in steps 1-2, so the backrest can be adjusted in steps 1-3 to align the screw holes.

Step 2. Install the footrest



Remove the 3 screws and washers from the black panel at the back of the Seat(as shown in the picture), please keep them for the next step.

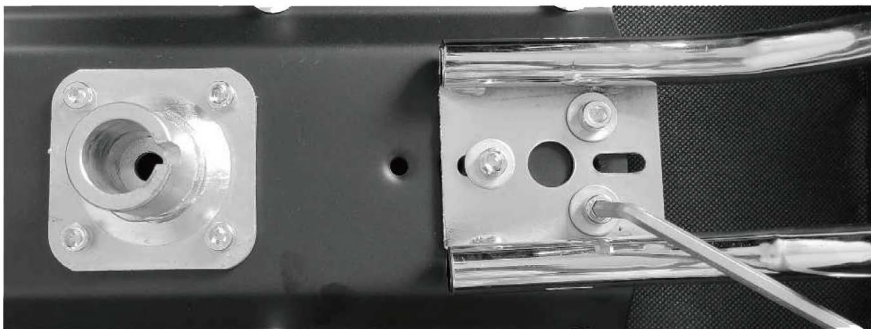

Align the screw holes, and re-tighten the screws removed in the previous step with the wrench.

Turn the seat to the upright position for the next step.

Step 3. Attach the pump to the base


Parts you will need for this step.



Base



Pump

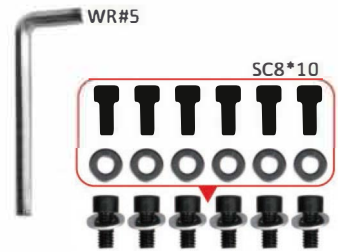

Screws



3-1. Turn the pump upside down, insert the base to the pump.



3-2. Align the 6 screw holes of pump and base, put in the screws and tighten the screws with WR#5.



3-3. Please make sure that all 6 screws are tightened and the base is stable.

Step 4. Install the top seat



Base and Pump



Align the hole on the black panel at the bottom of the top seat with the pump, and insert the top seat to the pump to secure the top seat. Nothing else needs to be done, the top seat will be secured when it is properly inserted onto the Pump.

*Tips for height adjustment

To Lower The Seat: step on the step pedal all the way down to lower the seat.

To Raise the Seat: step on the step pedal halfway (can do it consecutively to slowly raise the seat to a higher position).