

**Studio® S Freestanding Tub**

☐ **2549004 Studio® S Freestanding Tub**

**Product Features:**

- Contemporary styling with soft rounded lines and neutral interior
- Premium acrylic with seamless, high gloss, easy to clean finish & durable fiberglass reinforcement with steel structural support construction
- Center drain location allows soaking from either end of the tub
- Minimized integral overflow for a clean, coverless design and deeper soaking depth
- UV stable and stain resistant surface
- Adjustable leveling feet for an easier and speedier installation
- Coordinates with Studio S bathroom suite to harmonize the bathroom's look and feel
- Limited Lifetime warranty on manufacturers defects

**Nominal Dimensions:**

68" x 34" x 24-1/2"  
(1726 x 863 x 622mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- IAPMO Z124
- CSA B45.5-11



SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

**To Be Specified - Required:**

Color: ☐ .020 White


1582200 Tub Drain Kit; Choose Finish:

- ☐ .002 Chrome
- ☐ .295 Brushed Nickel
- ☐ .243 Matte Black

**Drain adapter rough-in suggest**

- ☐ OS&B® ABS Island Tub Drain™ Rough-In #ITD35
- ☐ PVC Island Tub Drain™ Rough-In #ITD5135
- or
- ☐ Cast Iron Island Tub Drain Rough-In #ID357

Island Tub Drain™ is a registered trademark of OS&B®

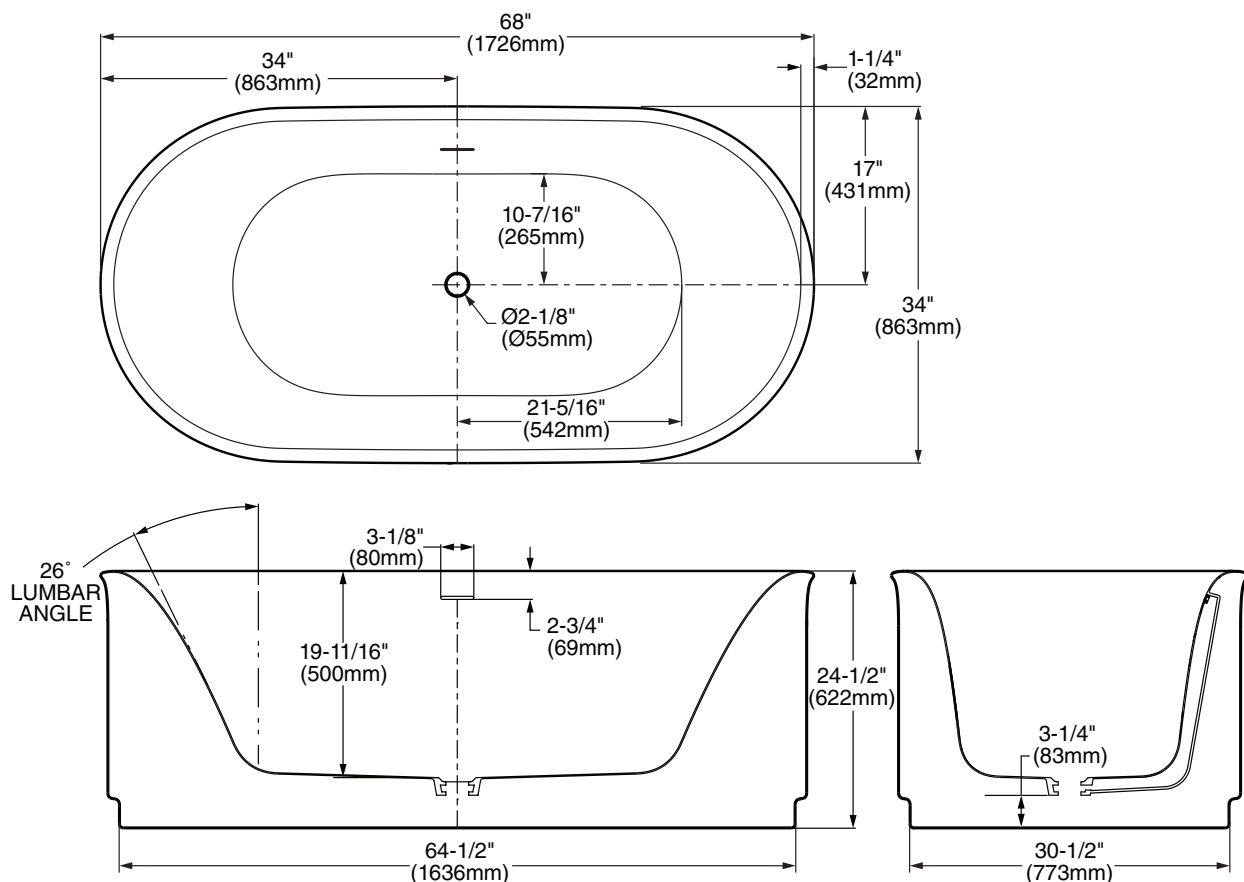

**GENERAL SPECIFICATIONS FOR  
2549 FREE STANDING BATH**

|                         |                                              |
|-------------------------|----------------------------------------------|
| INSTALLED SIZE          | 68 x 34 x 24-1/2 in.<br>(1726 x 863 x 622mm) |
| WEIGHT                  | 145 Lbs. (66 Kg.)                            |
| WEIGHT w/WATER          | 710 Lbs. (322 Kg.)                           |
| GAL. TO OVERFLOW        | 68 Gal. (257L)                               |
| BATHING WELL AT SUMP    | 42-5/8 x 20-7/8 in. (1083 x 530mm)           |
| BATHING WELL AT RIM     | 65-1/2 x 31-1/2 in. (1662 x 799mm)           |
| WATER DEPTH TO OVERFLOW | 17 in. (431mm)                               |
| FLOOR LOADING           | 32 Lbs./Sq.Ft. (155 Kgs./Sq.m)               |
| (PROJECTED AREA)        |                                              |

**NOTES:**

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

Fittings not included and must be ordered separately.

Provide suitable reinforcement for all supports.

Mounting holes drilled by installer.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.