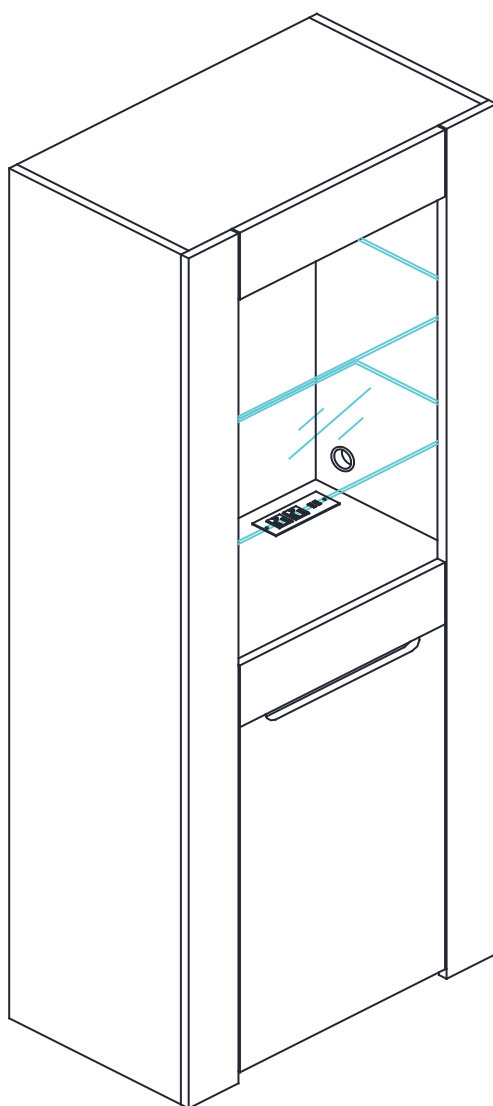
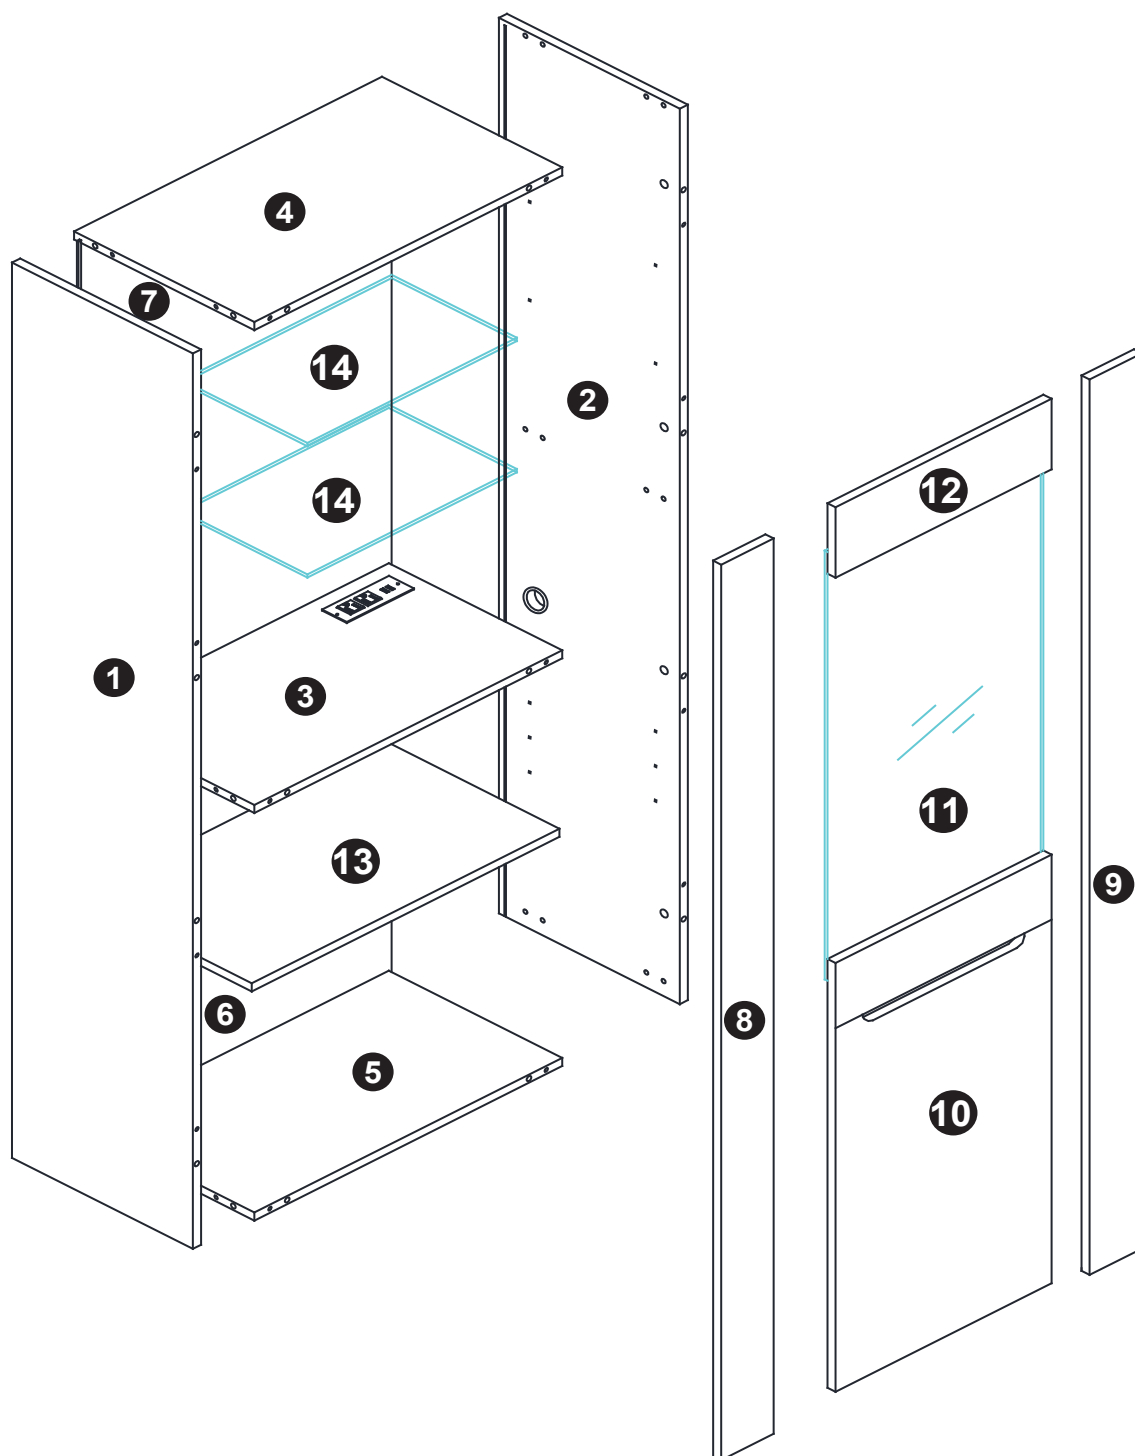
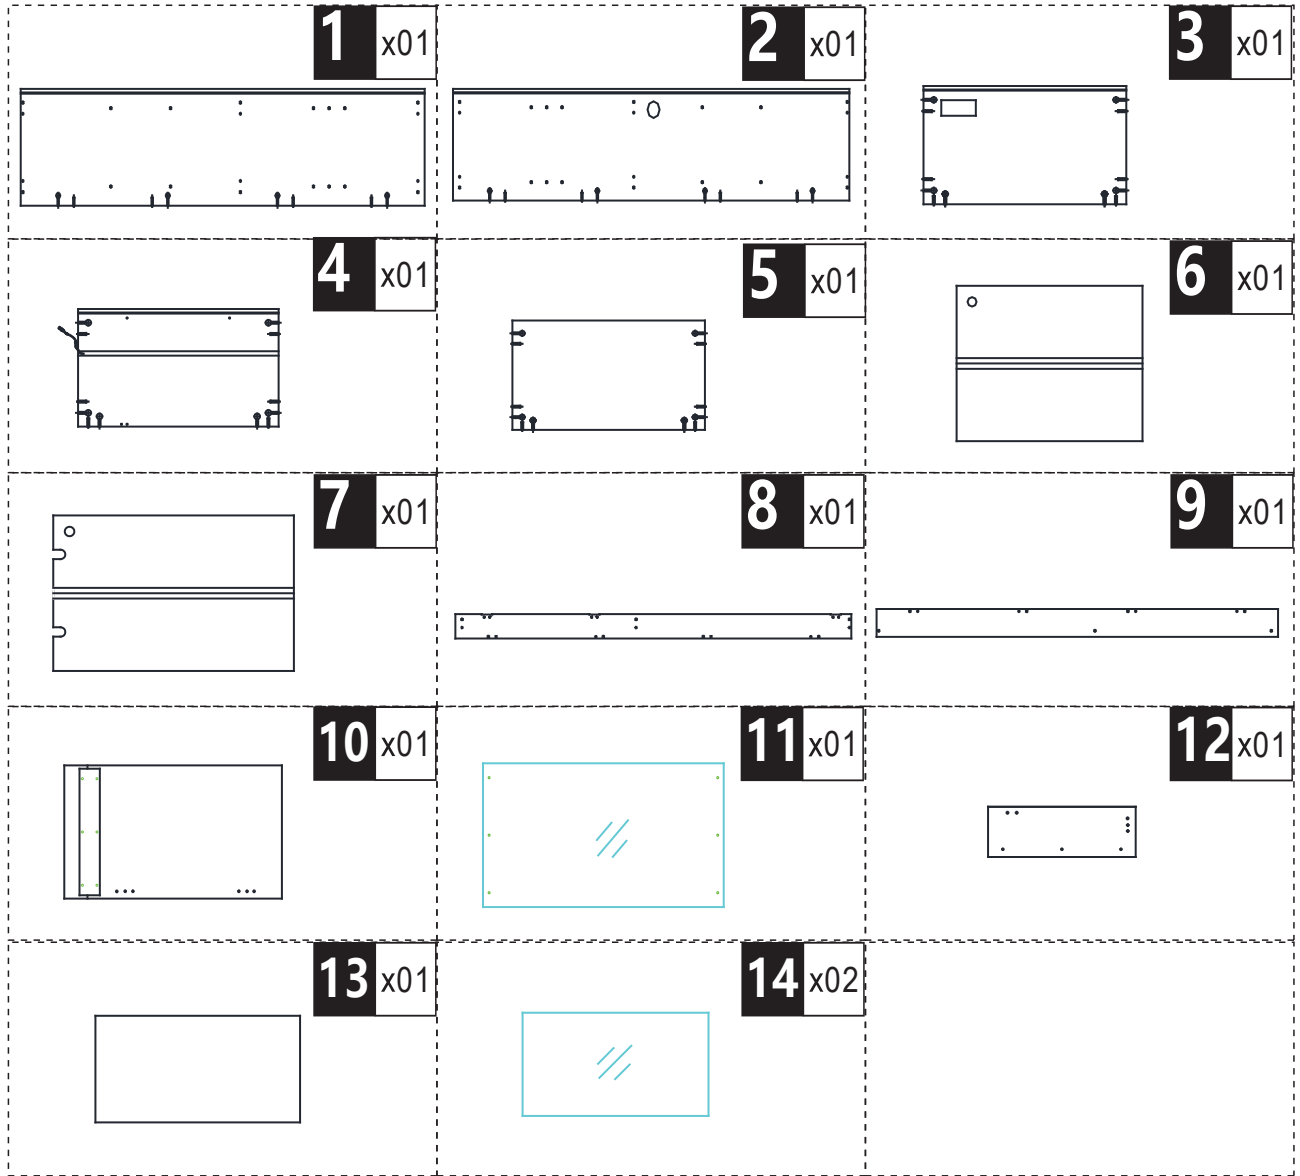










A x26
Ø7*29
+1 (spare)




B x26
Ø6*30
+1 (spare)



C x26
Ø15*10
+1 (spare)



D x12
Ø8*23



F x03
L60*34*23




I x34
M3.5*14
+2 (spare)




L x01
Ø60*22




U x06
M5*16



N x01
L54*16*16




H x02
L65*15



K x02
M6*30





P x02
M4*30




W x08
15*10



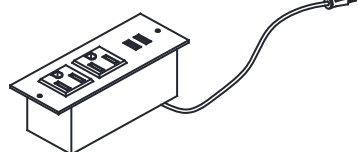X x12
M3*16
+1 (spare)






V x01






O x01


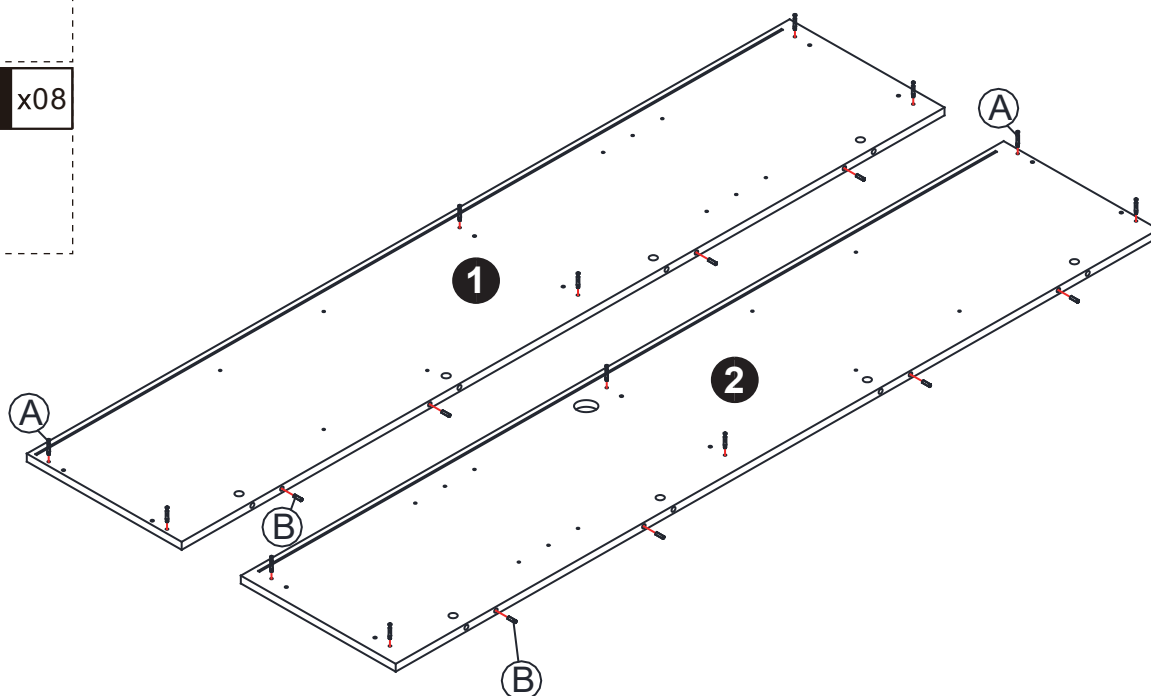
01

A x12**B** x08

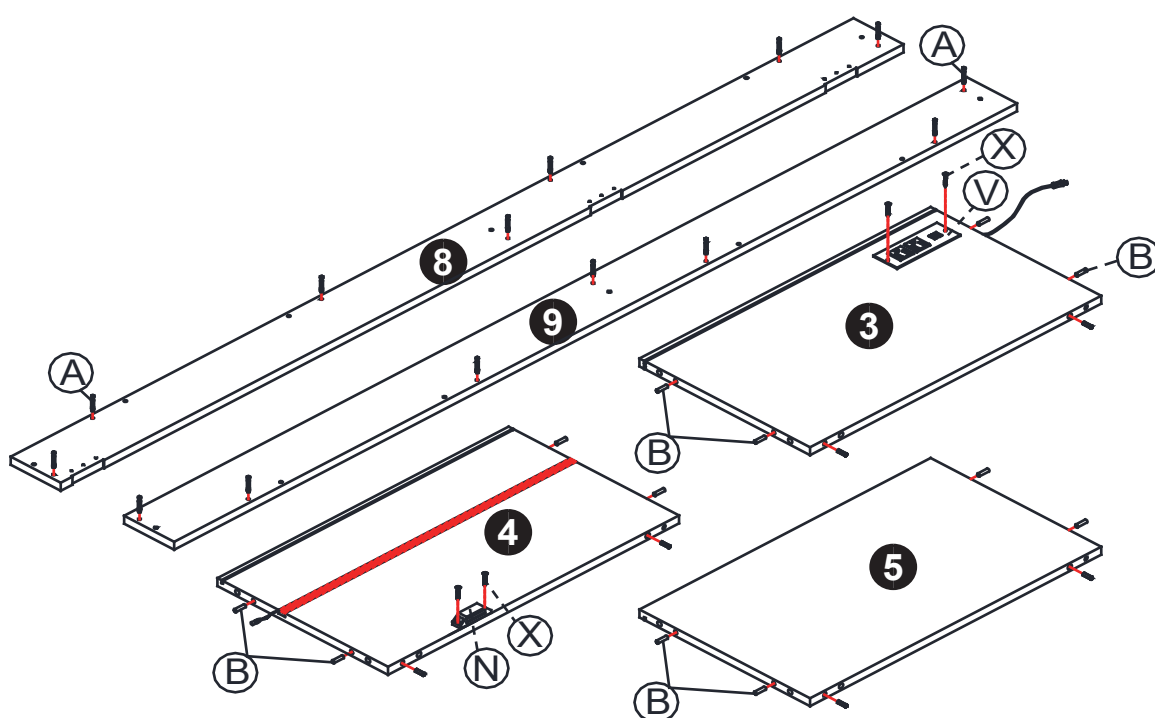

02





A x14**B** x18**V** x01**X** x04**N** x01




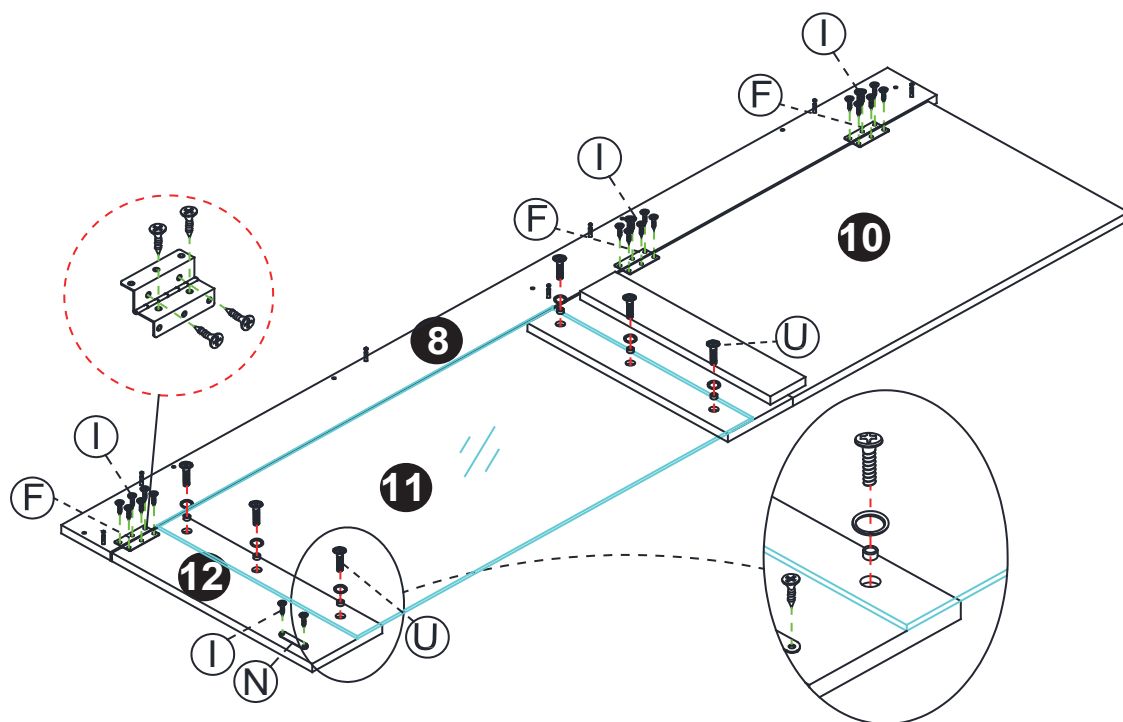
03



F x03**U** x06**N** x01**I** x32

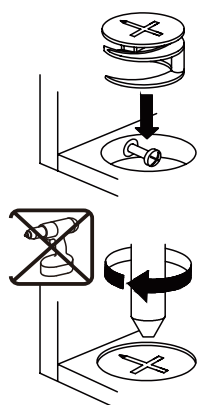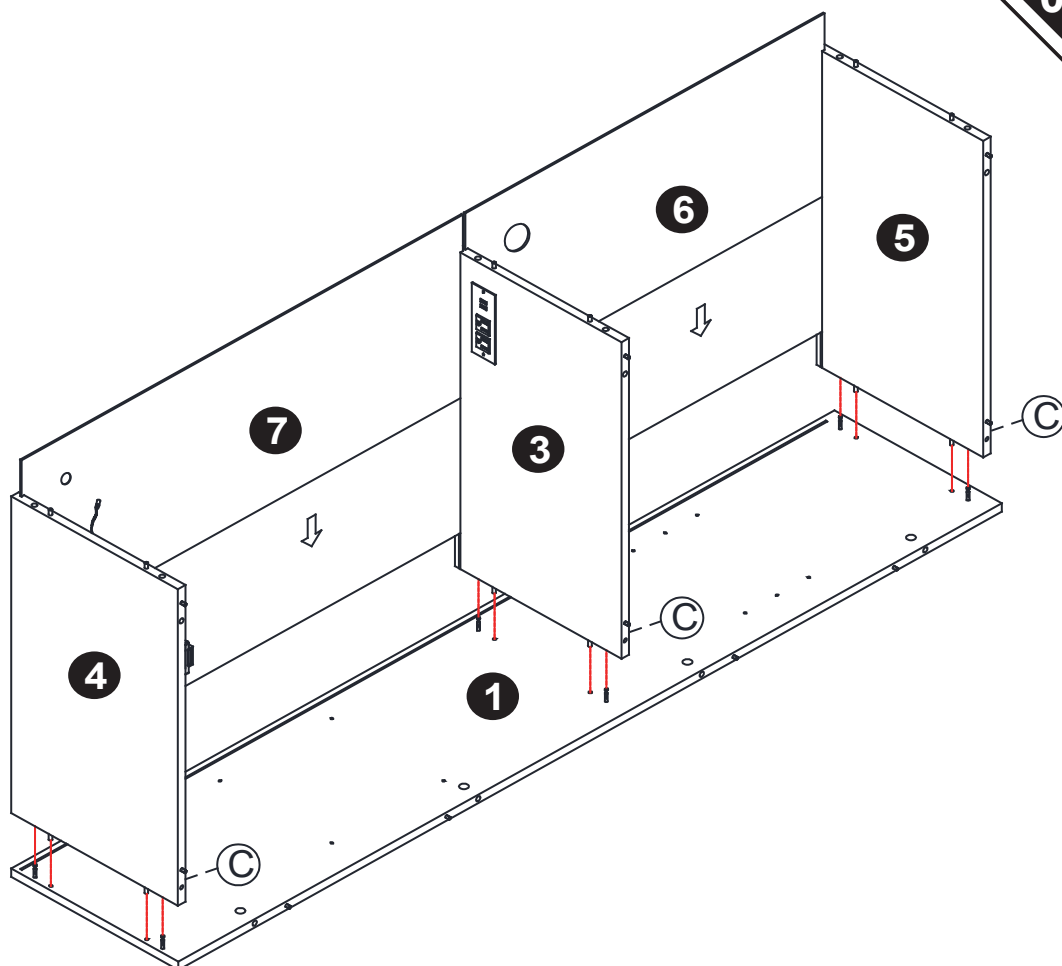04

C x06

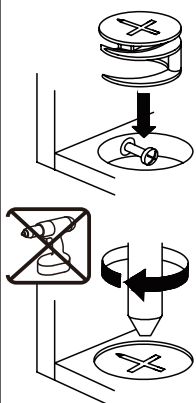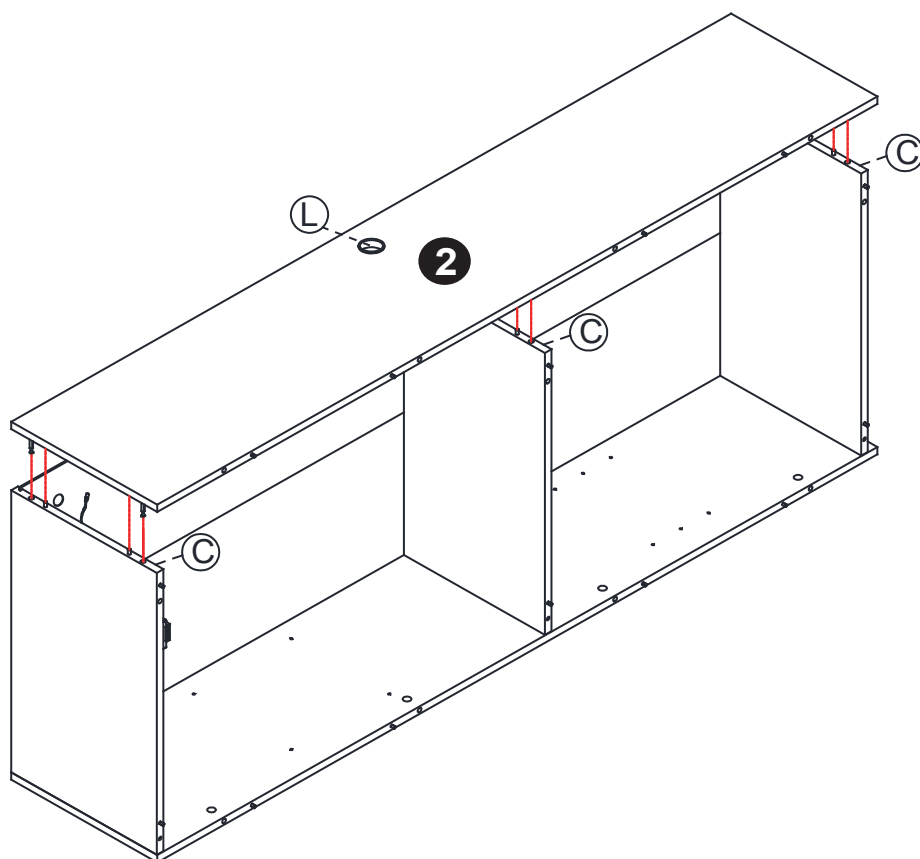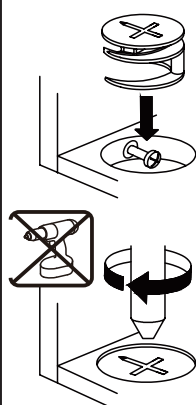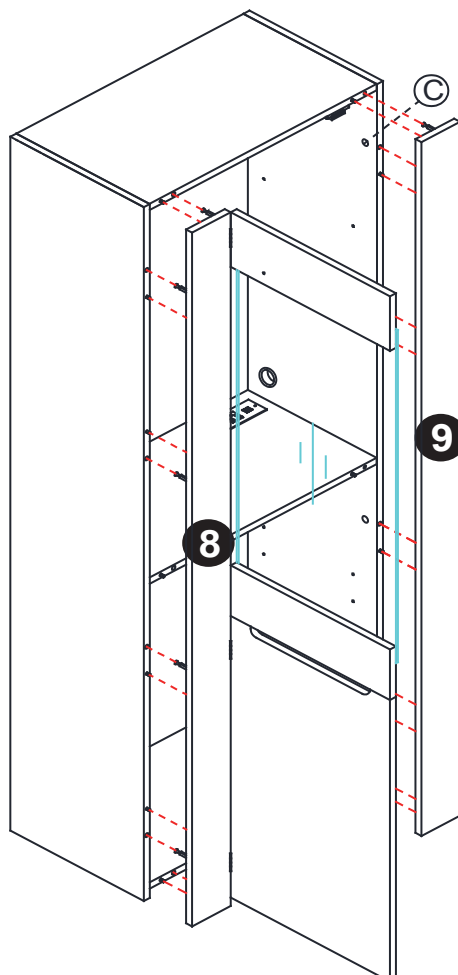C x06**L** x01**C** x14

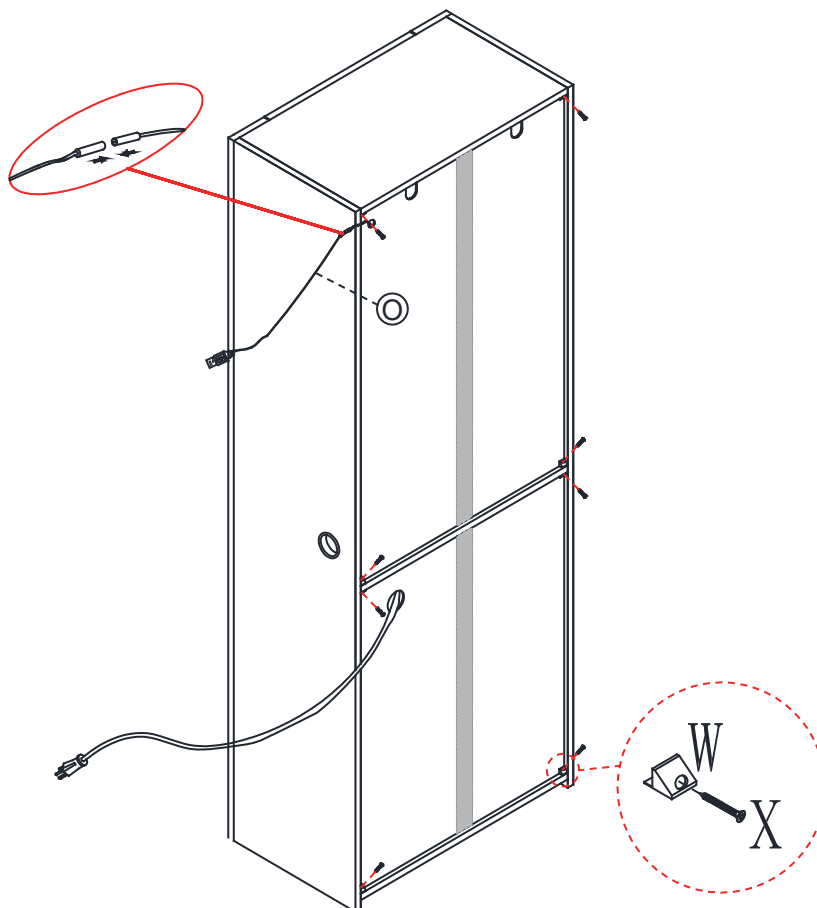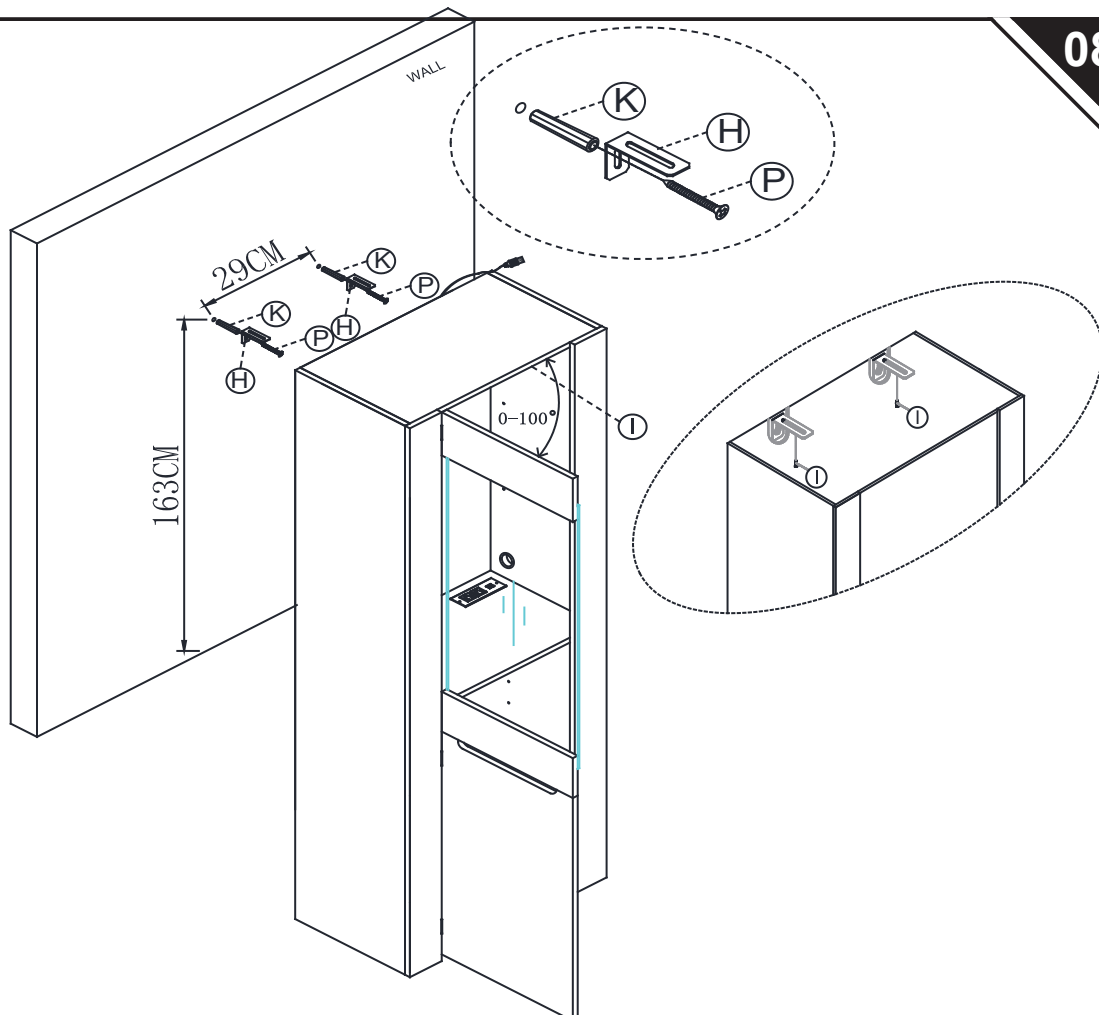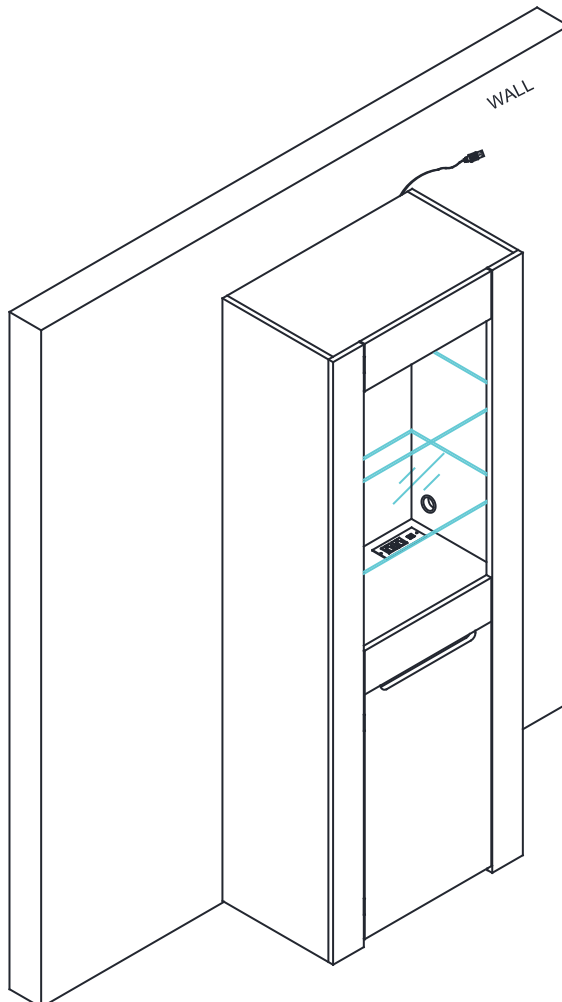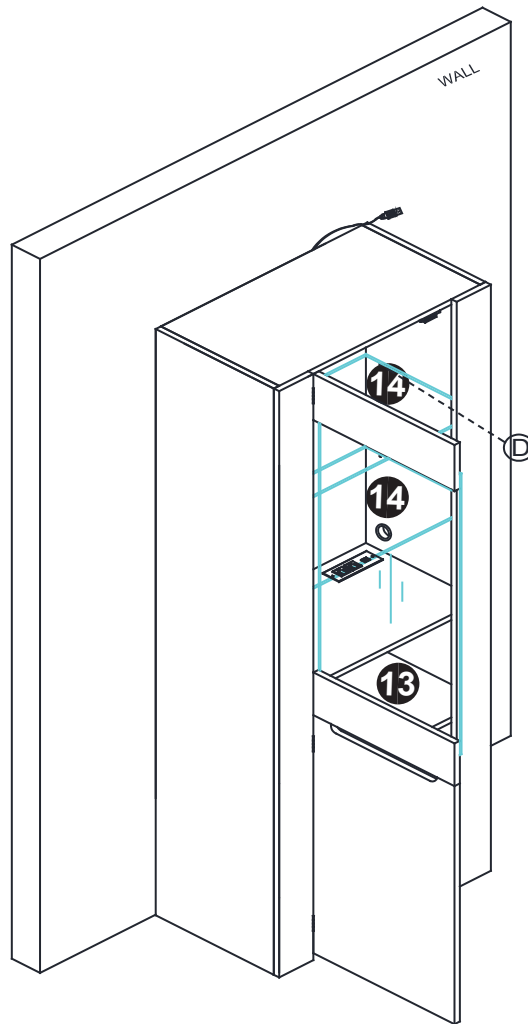O x01**W** x08**X** x08**K** x02**P** x02**H** x02**I** x02

D x12

Operation Instructions of Controller

I. Specifications:

Working temperature:-20-60°C

Product size:L62xW35xH23mm

Net weight: 60g

Output:Three CMOS drain-open output

Max load current: 2 A each color

Supply voltage: DC 5V

Package size: L105xW65xH55mm

Gross weight: 70g


Connecting Mode: Common anode

II. Control Method:

Adopt IR remoter to controil the led controller, which has 24 buttons, the function of each button as the table below:

Brightness +(Speed up)	Brightness -(Speed down)	Off	On
Static red	Static green	Static blue	Static white
Static orange	Static Pea green	Static dark blue	7 color jumpy change
Static dark yellow	Static cyan	Static brown	All fade out&fade in
Static yellow	Static light blue	Static pink	7 color fade change
Static straw yellow	Static sky blue	Static purple	3 base color jumpy

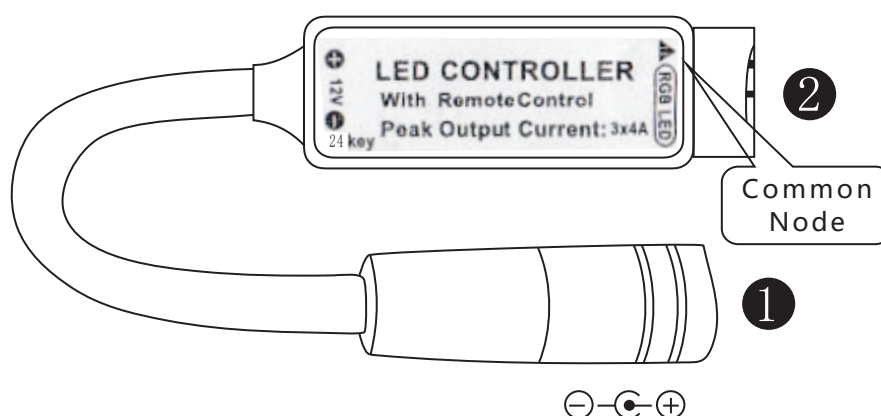III .Panel specification and connecting drawing as follows :



IV. Warning :

- 1 . Supply vlotage of this product is DC 5V .
- 2 . Never connect two wires directly in case of short circuit .
- 3 . Lead wire should be connected correctly according to colors that connecting diagram offers .
- 4 . Warranty of this product is one year, in this period we guarantee replace ment or repairing with no charge , but exclude the artificial situation of damaged or overload working .