

Features


- Cast iron with Safeguard® finish
- Left or right drain
- Integral apron
- For above the floor roughing-in
- Raised bath bottom allows use of a horizontal drain from drain to wall
- 60" (1524 mm) x 32" (813 mm) x 16-1/4" (413 mm)

BATH
K-519
ALSO K-520

ADA

CSA B651

OBC

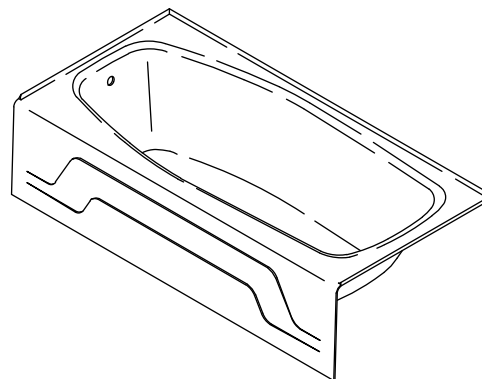

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.1/CSA B45.2

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-519	Bath – left drain	☐ 0	☐ Other_____
K-520	Bath – right drain	☐ 0	☐ Other_____

Recommended Accessories

K-7160-AF	Clearflo adjustable pop-up drain – above or through-the-floor installation	☐ CP	☐ PB	☐ Other_____
-----------	--	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1491	Pillow	☐ 0	☐ Other_____
K-1601	Footstop	☐ 0	☐ Other_____

Product Specification

The bath shall be made of cast iron with a Safeguard finish. Bath shall be 60" (1524 mm) in length, 32" (813 mm) in width, and 16-1/4" (413 mm) in height. Bath shall feature an integral apron. Bath shall feature a raised bath bottom, which allows the use of a horizontal drain from the outlet to the wall. Bath shall be available with shall a left or right drain. Bath shall be for above the floor roughing-in. The bath shall be Kohler Model K-____-____.

DYNAMETRIC®

Technical Information

Fixture*:	
Basin area:	
Bathing well	41" (1041 mm) x 22" (559 mm)
Top area	54" (1372 mm) x 25" (635 mm)
Weight	345 lbs (156.5 kg)
To overflow:	
Water depth	8-5/8" (219 mm)
Capacity	35 gal (132.5 L)
* Approximate measurements for comparison only.	

Installation Notes

Install this product according to the installation guide.


NOTICE: By design, the apron is not perpendicular. The bottom edge of the apron angles out approximately 3/4" (19 mm) from the top of the rim.

Floor support under bath must provide for a minimum of 50 lbs/square foot (243 kg/square meter) loading.

Will comply with **ADA** when installed per Section 607
Bathtubs of the Act.

Will comply with **CSA B651** when installed per Clause 4.4.7 of the standard.

will comply with **OBC** when installed per Clause 3.8.3.13.

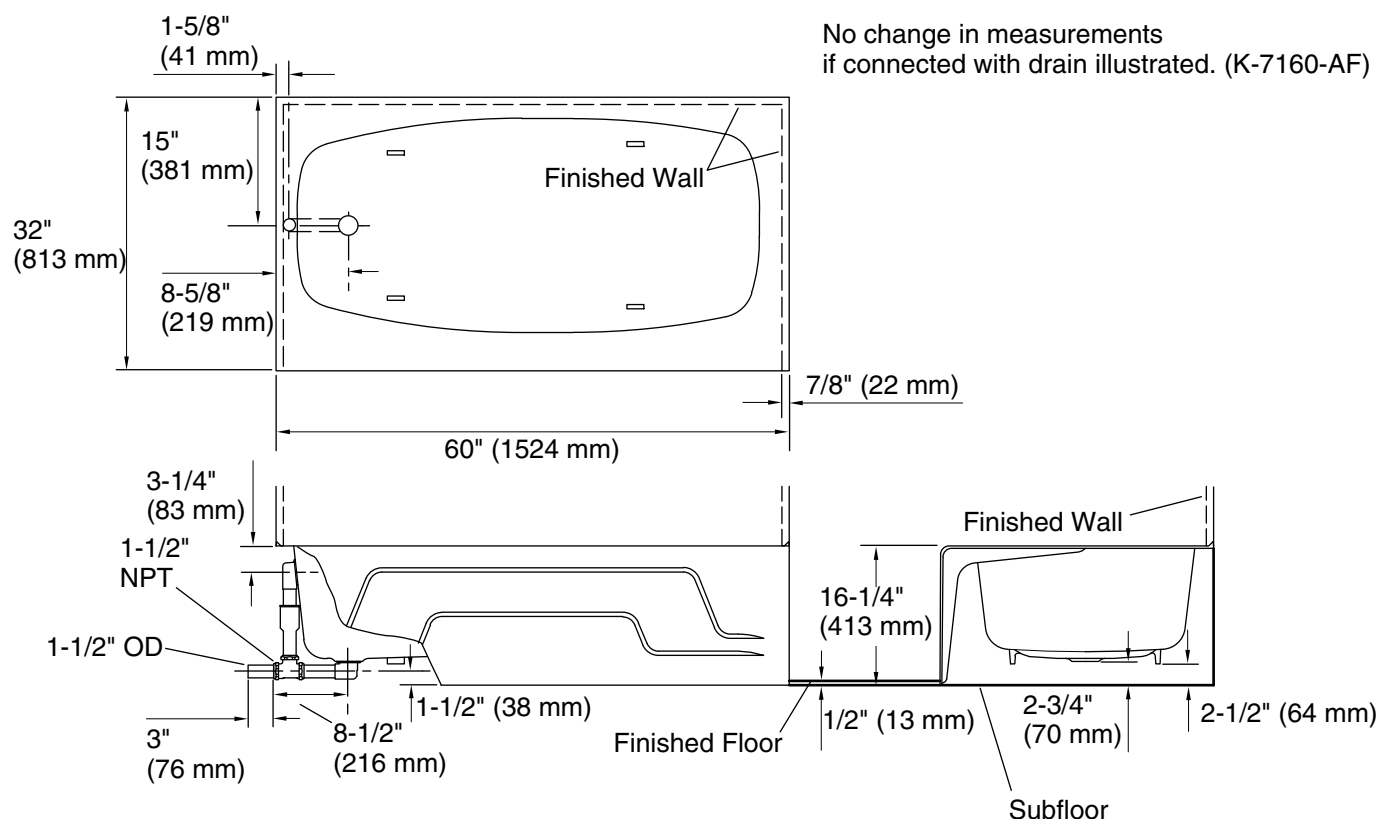

Product Diagram