


### Features

- Acrylic
- Oval shape
- Drop-in
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- Optional K-1491 removable bath pillow
- Optional K-9698 whirlpool trim kit in various finishes
- 8 individually adjustable ProFlex® hydro-massage jets
- Textured bottom surface
- Coordinates with Serif suite
- 60" (1524 mm) x 42-1/4" (1073 mm) x 21" (533 mm)

### 5' BATH WHIRLPOOL WITH HEATER K-1337-HN

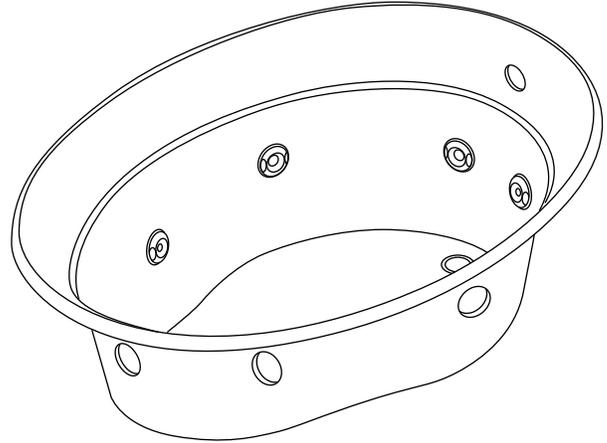

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes		
K-1337-HN	5' bath whirlpool with heater – custom pump	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
<b>Recommended Accessories</b>				
K-7166-AF	Adjustable pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
<b>Optional Accessories</b>				
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-9698	Jet trim kit (metal finishes)		<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

### Product Specification

The oval bath whirlpool shall be 60" (1524 mm) in length, 42-1/4" (1073 mm) in width, and 21" (533 mm) in height. Bath whirlpool shall be made of acrylic for drop-in custom pump installation. Bath whirlpool shall have 8 individually adjustable ProFlex® hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Bath whirlpool shall have a textured bottom surface and shall coordinate with the Serif suite. Bath whirlpool shall have an optional K-9698 jet trim kit and an optional K-1491 removable bath pillow. Bath whirlpool shall be Kohler Model K-1337-HN-\_\_\_\_\_.

# SERIF®

## Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (1067 mm) x 28" (711 mm)
Top area	55" (1397 mm) x 40" (1016 mm)
To overflow:	
Water depth	15-1/2" (394 mm)
Capacity	73 gal (276.3 L)
Weight	115 lbs (52 kg)
* Approximate measurements for comparison only.	

Pump:	V	Hz	A	
1-speed	120	60	7.5	
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Included components:	
Cutout template	1017044-7

## Required Electrical Service


Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 43 lbs/square foot (208 kg/square meter) loading.

Provide pump/control access in either location shown; supplies must not interfere with pump/control access.

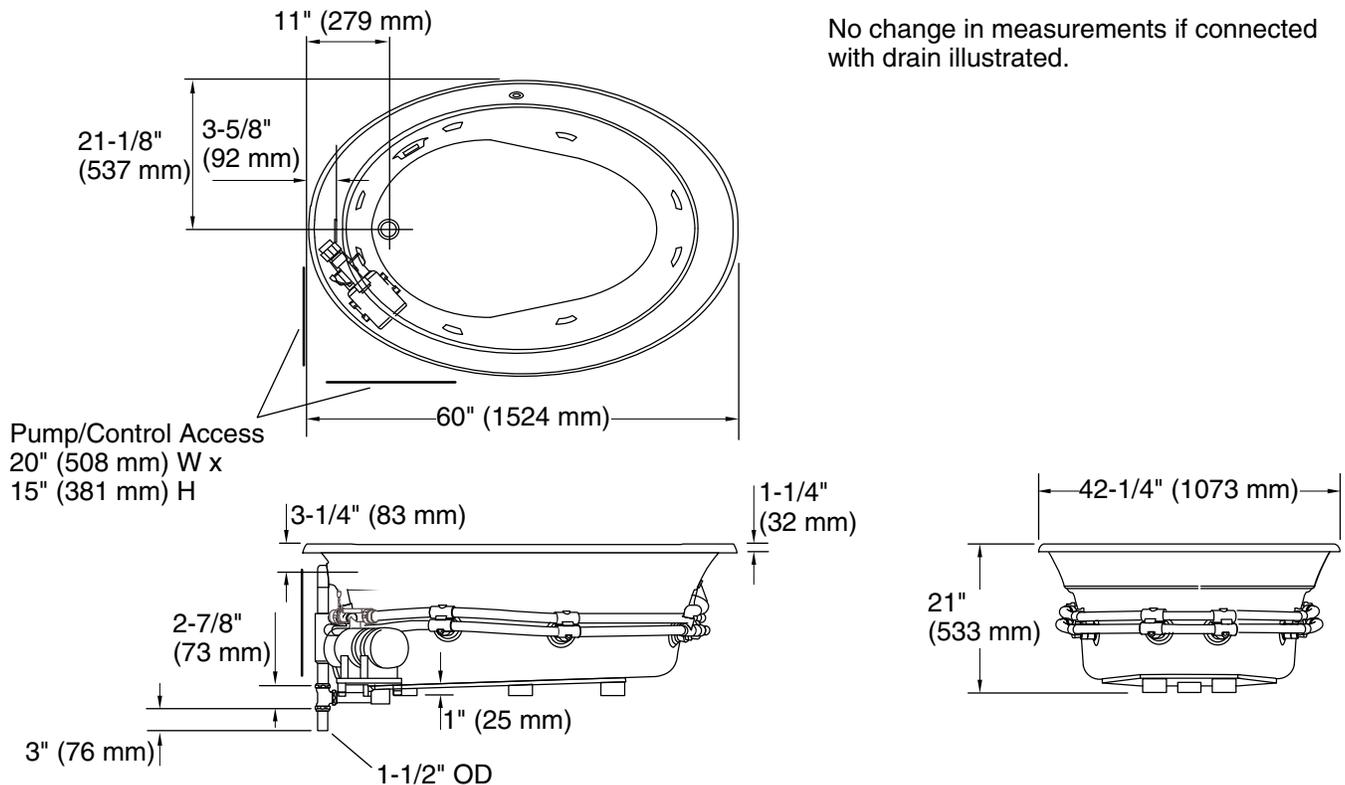

No change in measurements if connected with drain illustrated.

## Product Diagram