


Features

- *Acrylic*
- *Bask™ heated lumbar support with three temperature settings*
- *5 fully adjustable color-matched hydro-massage jets*
- *Molded lumbar support and armrests for comfort*
- *Textured bottom surface*
- *Integral apron with removable access panel*
- *3-wall alcove installation with integral tile flange*
- *Left or right drain*
- *66" (1676 mm) x 36" (914 mm) x 21-1/4" (540 mm)*

5.5' BATH WHIRLPOOL WITH INTEGRAL APRON AND BASK™ **K-1224-LAW** ALSO K-1224-RAW

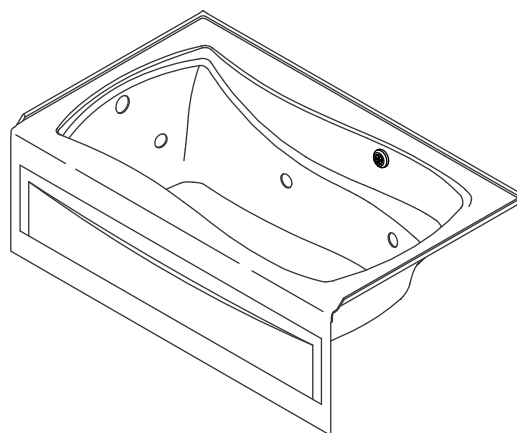

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *UL 1795*
- *CSA B45.5/IAPMO Z124*
- *ASME A112.19.7/CSA B45.10*
- *ASTM E162*
- *ASTM E662*

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1224-LAW	5.5' Bath whirlpool with integral apron and Bask – left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1224-RAW	5.5' Bath whirlpool with integral apron and Bask – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7166-AF	Adjustable pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP		<input type="checkbox"/> Other_____

Optional Accessories

K-1234	Removable apron	<input type="checkbox"/> 0				<input type="checkbox"/> Other_____
K-9695	Metal finish 5 jet trim kit		<input type="checkbox"/> CP	<input type="checkbox"/> PB		<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 21-1/4" (540 mm) in height. Bath shall feature Bask heated lumbar support with three temperature settings. Product shall have 5 fully adjustable color-matched hydro-massage jets. Product shall feature molded lumbar support and armrests for comfort and textured bottom surface. Product shall have an integral apron with removable access panel. Product shall be for 3-wall alcove installation with integral tile flange. Product shall have left or right drain. Bath whirlpool shall be Kohler Model K-1224-____-____.

MARIPOSA®

Technical Information

Fixture*:	
Basin area:	
Bathing well, bottom	48" (1219 mm) x 24" (610 mm)
Bathing well, top	59" (1499 mm) x 30" (762 mm)
Weight	116 lbs 52.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	67 gal (254 L)
* Approximate measurements for comparison only.	

	V	Hz	A
1-speed pump	120	60	7
Heated surface	120	60	0.5

Required Electrical Service


Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/Control/Heated surface	120 V, 15 A, 60 Hz

Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 42 lbs/square foot (205 kg/square meter).

Locate a GFCI-protected 120 V, 15 A, grounded duplex electrical outlet within 24" (610 mm) of the bath junction box.

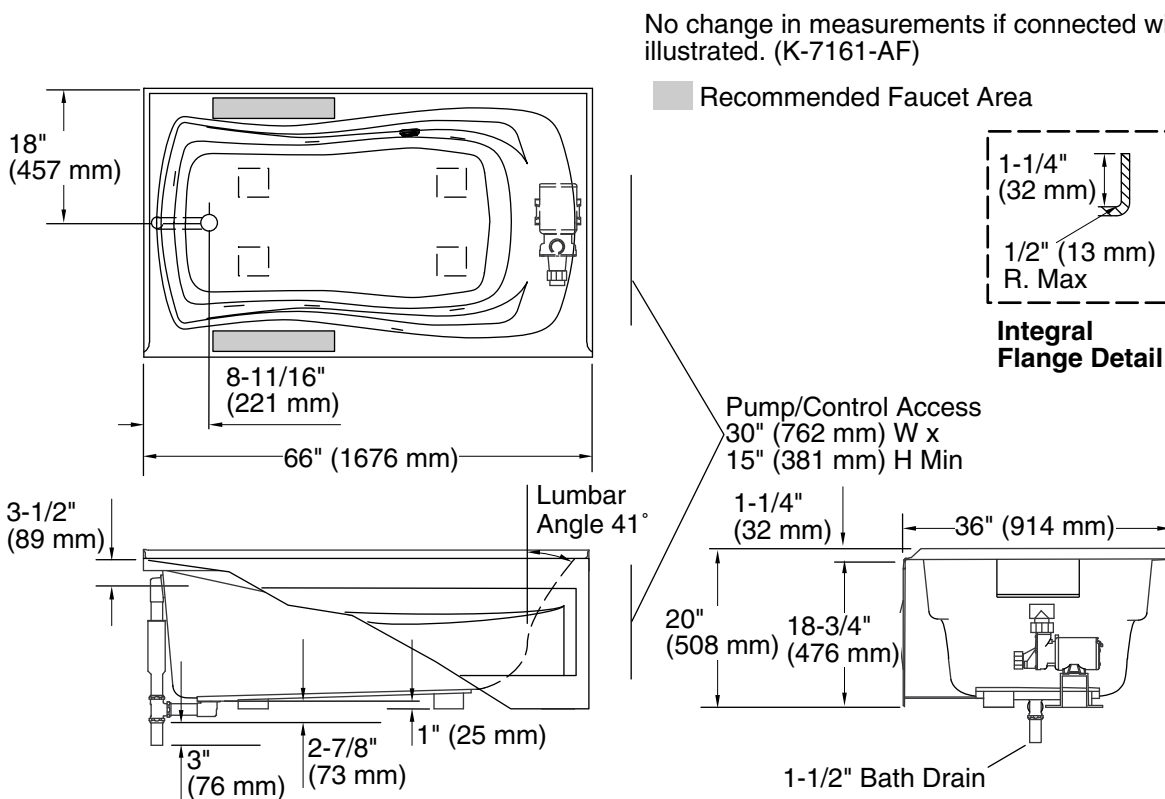

Product Diagram