

# Track Current Limiter - Flangeless

## W Track Recessed

WAC LIGHTING  
Responsible Lighting®




Fixture Type:

Catalog Number:


Project:

Location:

120V (WEDL-RTL, WEDR-RTL)

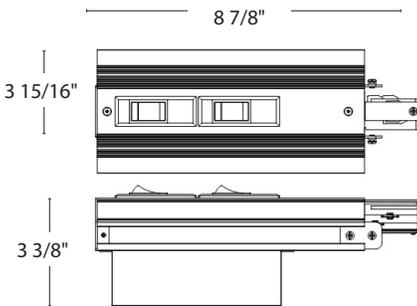

277V (WHEDL-RTL, WHEDR-RTL)

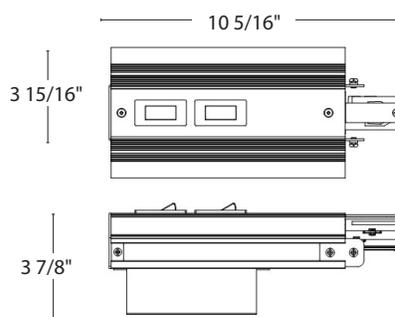

### PRODUCT DESCRIPTION

Track current limiter, recessed single live end. Designed for use with W Track System. Assures compliance to California Title 24 or ASHRAE 90.1 requirements.

### FEATURES

- 120V (WEDL-RTL, WEDR-RTL), 277V (WHEDL-RTL, WHEDR-RTL), 60Hz rated
- Switch is polarized, must be installed in accordance with all national and local codes.
- Wire terminals for use with 12 or 14 AWG solid copper wires.
- Circuit breaker can limit the electrical load that can be placed on the circuit. Circuit breaker also can be used as standard ON/OFF switch.
- Extruded aluminum construction
- UL & CUL listed
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Materials:** Aluminous track mounted on track connector. Two circuit breakers mounted on galvanized steel cover. A galvanized steel cover secures with two screws to the track connector and connects to the connection plate.

**Mounting:** Mounts directly to a recessed ceiling. Connects directly to W Track unit. Also suitable for mounting to grid ceiling runners and W stem mounted track.

**Finish:** Available in black powder coat (BK), white powder coat (WT), or platinum anodized (PT) finishes

**Standards:** UL & CUL listed

### ORDER NUMBER

Model	Polarity	Volt	Rating per Circuit	Finish
WEDL-RTL	left	120V	1A 1 Amp	BK Black PT Platinum WT White
WEDR-RTL	right		2A 2.5 Amp	
			5A 5 Amp	
WHEDL-RTL	left	277V	7A 7.5 Amp	
WHEDR-RTL	right		10A 10 Amp	
			12A 12 Amp	



Example: WEDL-RTL-10A-PT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760