

LED Vanity Bar

ASSEMBLY INSTRUCTIONS


REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT
TO DAMAGE ANY COMPONENTS.

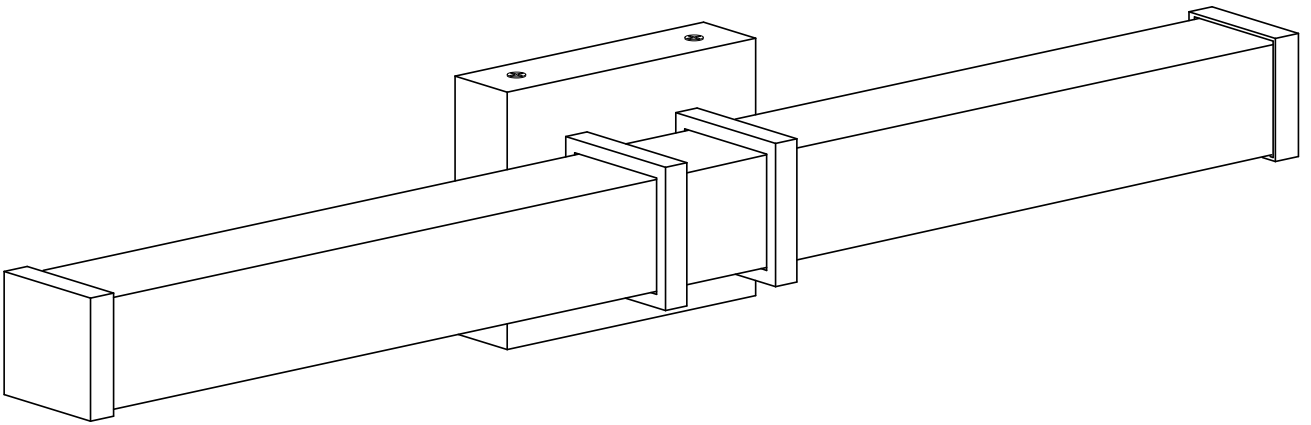


PROFESSIONAL INSTALLATION RECOMMENDED

LED Vanity Bar

REMOVE ALL PARTS FROM PACKAGE, BE CAREFUL NOT TO DAMAGE ANY COMPONENTS.

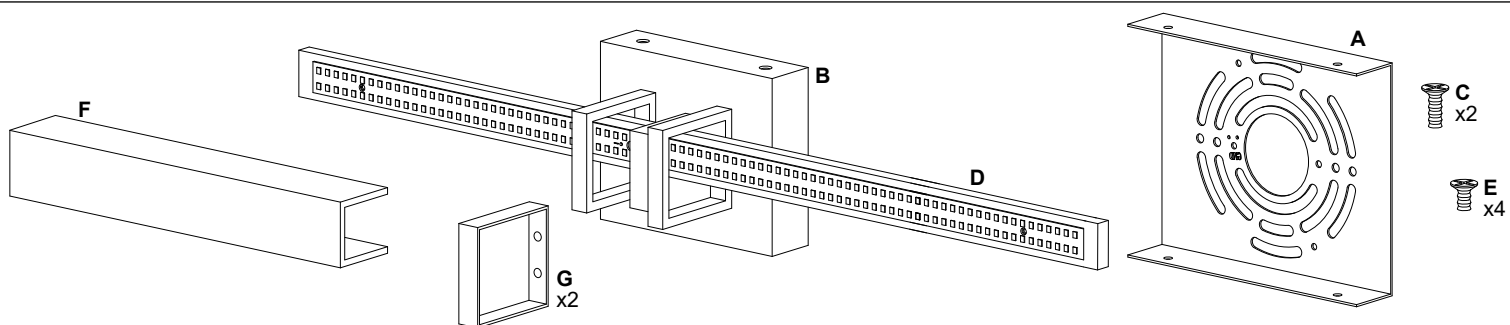

1. Measure area and determine desired mounting height.
2. Detach mounting plate [A] from backplate [B] by removing backplate screws [C].
3. Mounting plate [A] will attach to junction box.
4. Slide glass shade [F] over integrated LED strip [E] and through the decorative square braces on backplate [B], open side facing the backplate [B].
5. Position end cap [G] so that the holes are aligned with screw holes on end of light strip [E]. Secure with end cap screws [E]. Repeat on other side to secure glass shade [F].
6. Install light to wall. We recommend installation by a qualified electrical professional. Secure light to wall by replacing backplate screws [C].

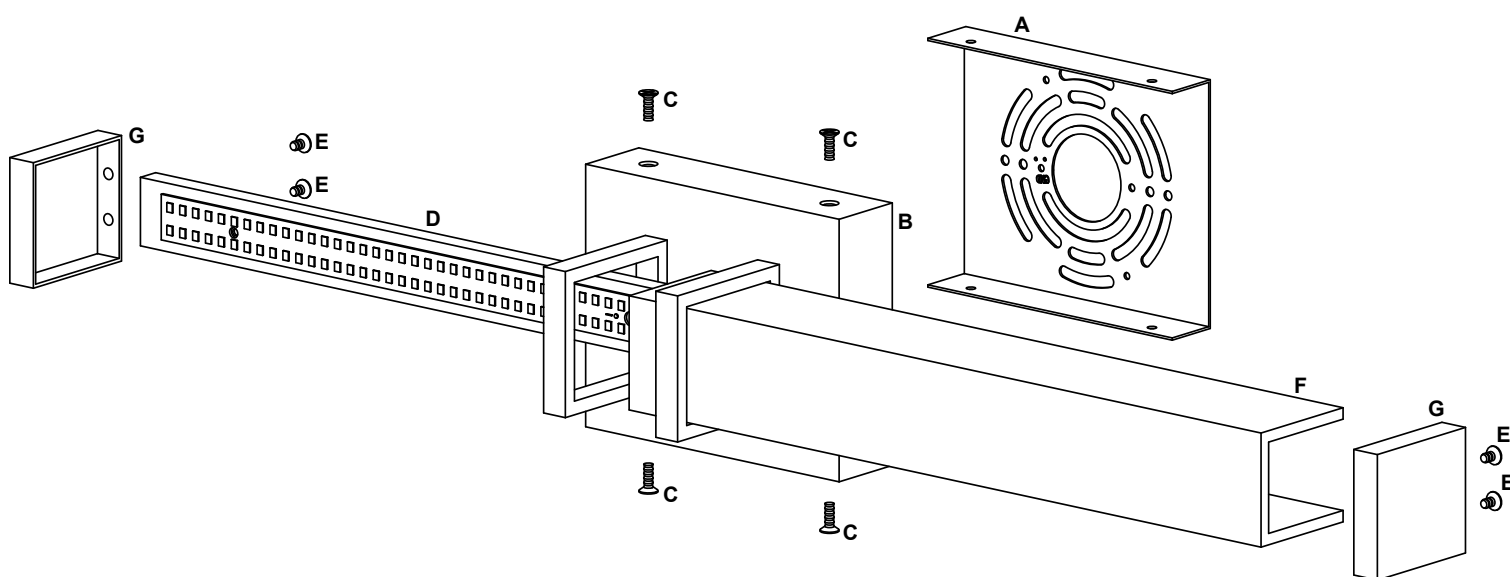

Note: Turn off switch before replacing the bulb. Make sure the bulb has sufficient time to cool down.
Do not subject the lamp to any shock while lit as shattering of glass shade may result.