



Forté® | K-22165-G

Four-function handshower, 1.75 gpm

Features

- Multifunction showerhead and handshower each have advanced spray engines to provide three experiences: full coverage, pulsating massage, and silk spray
- Full coverage spray produces an encompassing spray ideal for everyday use
- Pulsating massage spray targets sore muscles to ease away aches and pains
- Silk spray releases a dense, luxurious spray ideal for rinsing
- Thumb tab allows for a smooth transition between sprays
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- Requires K-8593, K-9514, K-98360, K-98359, K-45981, or K-45982 shower hose (sold separately)
- Coordinates with Forte®, Alteo®, and Refinia® faucets and accessories
- Features a nonpositive shutoff: water-saving pause mode to temporarily reduce water flow
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:21 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

IMPORTANT: Product meets the Americans with Disability Act (ADA) and ICC A117.1 (specifically section 608.5) if installed properly with an adapter that enables a non-positive shut off. Please see the KOHLER Statement® ADA handshower hose adapter in the recommended products section.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 1.75 gpm (6.6 l/min)
Flow:

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories


- K-8593 72" metal shower hose
- or
- K-9514 60" metal shower hose
- or
- K-98360 72" smooth shower hose
- or
- K-98359 60" smooth shower hose
- or
- K-45981 72" ribbon hose
- or
- K-45982 60" ribbon hose

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



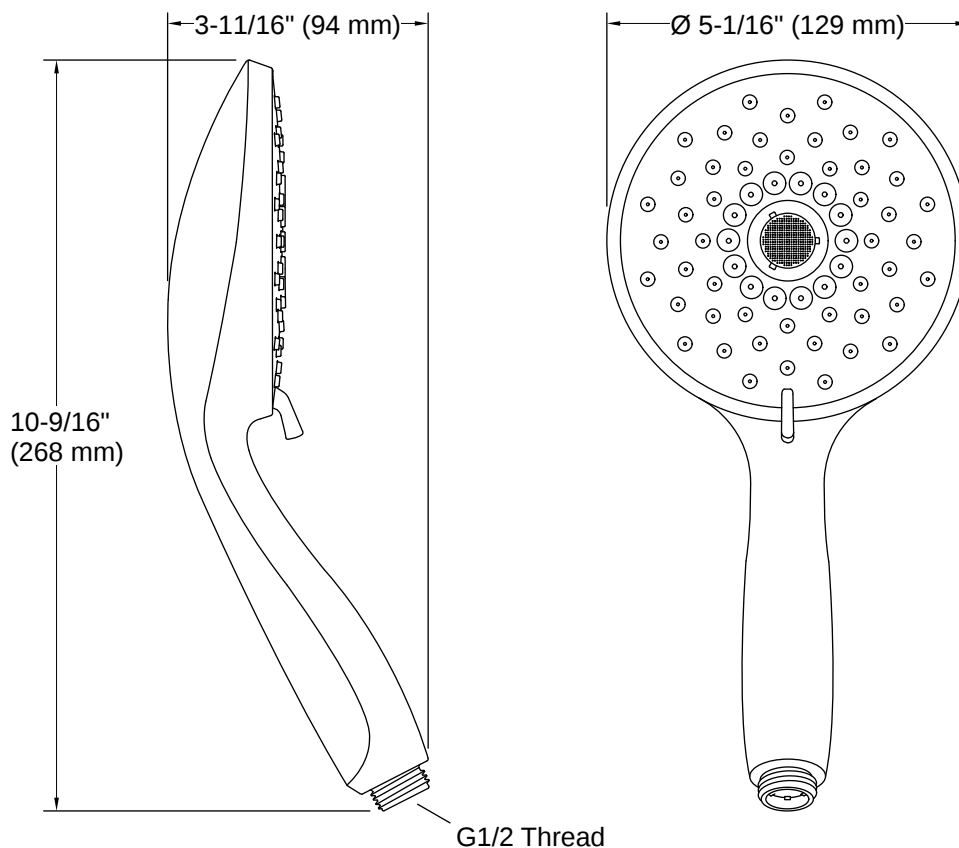

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

