



**TRIAIRE™ CUSTOM**

**MAD8515\*\*M  
64" Ceiling Fan**

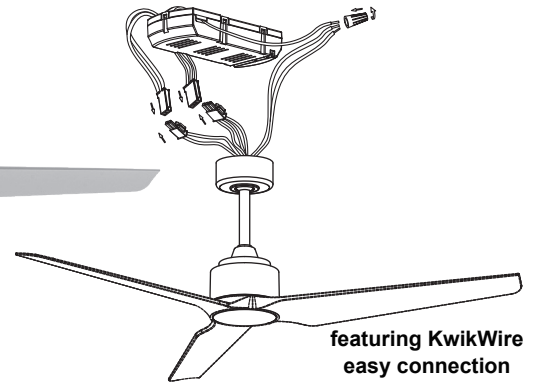

featuring KwikWire  
easy connection

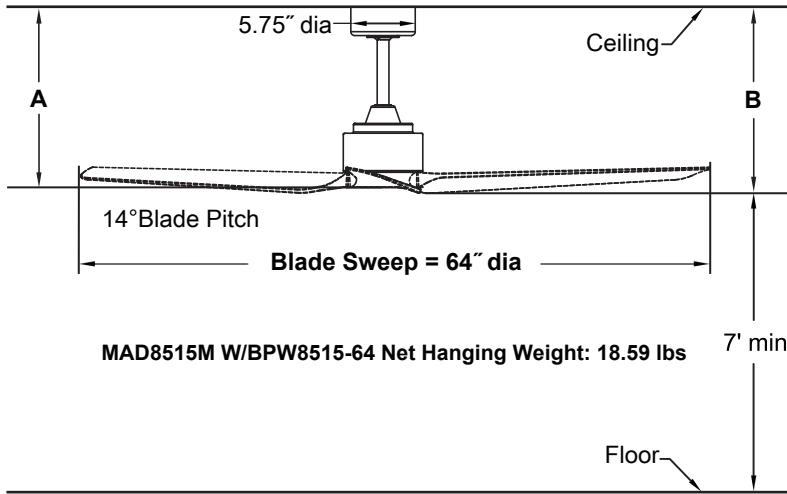

MAD8515M W/BPW8515-64 Net Hanging Weight: 18.59 lbs

**Available Finishes  
5-Year Finish Warranty**

BLM	Black
DZM	Dark Bronze
MWM	Matte White

	A	B
Fan w/8" downrod	15.92"	16.42"
Fan w/12" downrod	19.92"	20.42"
Fan w/18" downrod	25.92"	26.42"
Fan w/24" downrod	31.92"	32.42"
Fan w/36" downrod	43.92"	44.42"
Fan w/48" downrod	55.92"	56.42"
Fan w/60" downrod	67.92"	68.42"
Fan w/72" downrod	79.92"	80.42"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60Hz, 5 amp circuit.

**MOTOR SPECS:**

153 x 25 FS sensorless DC motor is designed for optimal performance with this fan.

**BLADES:**

3 bladed blade sets are available in composited materials — all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

**LIGHTING OPTIONS:**

LK8514\*\*M - One 18-watt 5 CCT LED (2700K/3000K/3500K/4000K/5000K).

**CONTROL OPTIONS:**

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, 5CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall controls are available — sold separately. Instructions are provided with each control.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 8" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry, damp and wet locations. This fan is for room over 400 sq ft.

**Airflow / Energy Efficiency Info**

test with BPW8515-64 Blade in 64" sweep

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 <sup>th</sup> )	134	6971	391	0.27	18
Med (4 <sup>th</sup> )	100	5154	597	0.14	9
Low (1 <sup>th</sup> )	49	2384	722	0.07	3

**Energy Guide FTC**

Measured with BPW8515-64 Blades in 64" sweep

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
15	4821	4	329

**Fan Velocity (FPM)**

Measured with BPW8515-64 Blades in 64" sweep

High Speed Velocity	Average Velocity
410	278