SDQ Lighting

ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: VL10101BG&VL10102BG&VL10103BG

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:

1. Before installing,consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.


WALL LAMP



VL10101BG



VL10102BG



VL10103BG

TOOLS REQUIRED




Flathead Screwdriver



Phillips Screwdriver



Ladder



Wire Strippers



Pliers



Electrical Tape



Wire Cutters



Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don¡t throw away the package,so as not to leave the parts in the package.


PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION
A	Mounting plate
B	Outlet box screw
C	Fixture body


PIECE	DESCRIPTION
D	Wire nut
E	Mounting screw

INSTALLATION

1. Attach the mounting plate(A) to the junction box with outlet box screw (B).
2. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire, black to (black) and white to (white).
3.Attach the fixture body(C) to the mounting plate(A) with mounting screw(E).
4. Select your favorite color temperature (CCT) from three options: 3000K, 4000K, or 5000K by the slide switch located on the side of the box.

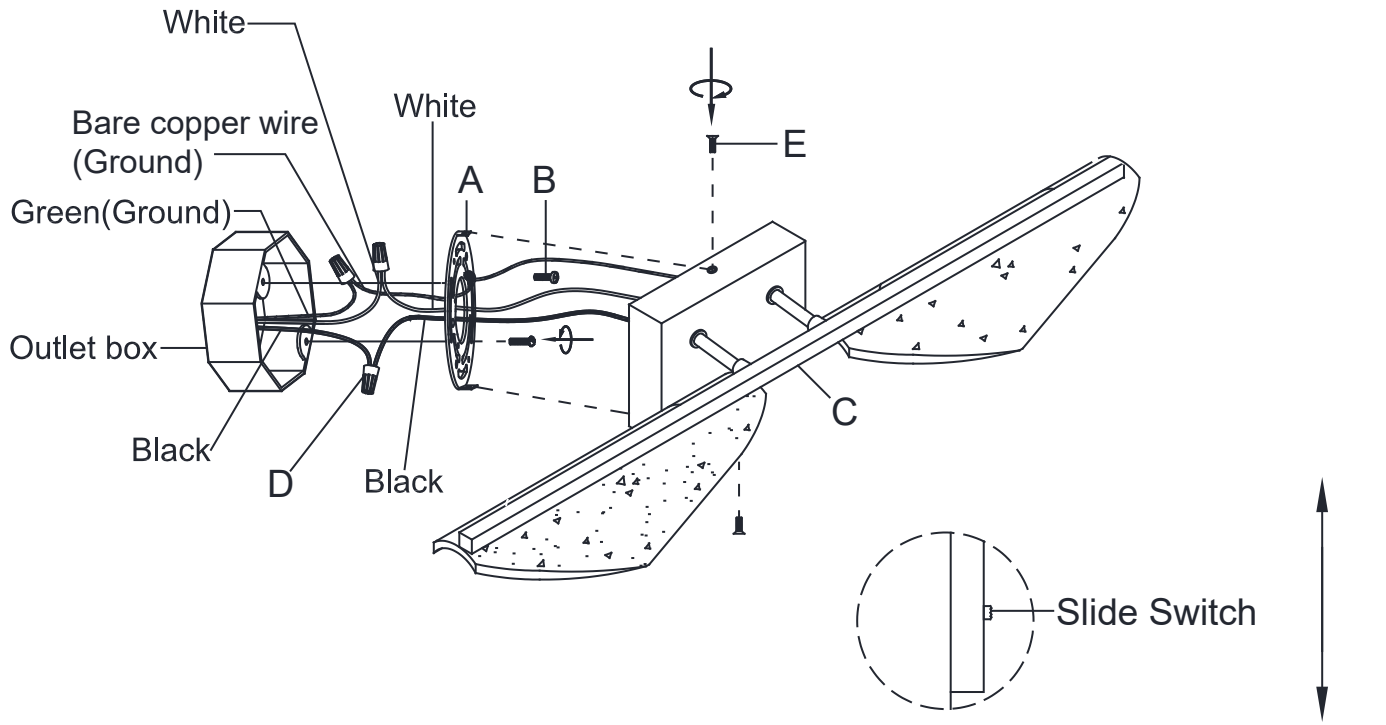

Color Temperature 3000K-4000K-5000K

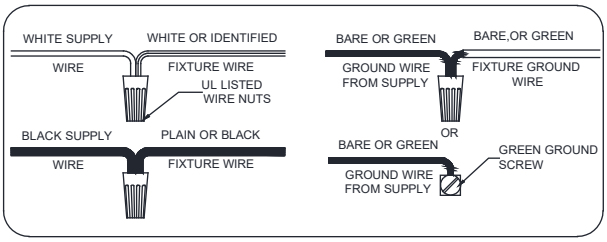

Thank you for purchasing a SDQ lighting product !
Need assistance with parts or assembly? Please call customer service at: 972-880-7868
Or visit us on-line at: WWW.SDQLIGHTING.COM or E-mail to:services@sdqlighting.com