ZEPHYR

ZEPHYRONLINE.COM


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*		
SINGLE BLOWER (INCLUDED) Min. - Max. CFM	200 - 700	200 - 590	200 - 390	200 - 290
SINGLE BLOWER (INCLUDED) Min. - Max. Sones	0.8 - 6			
DUAL BLOWER (OPTIONAL) Min. - Max. CFM	300 - 1,300			
DUAL BLOWER (OPTIONAL) Min. - Max. Sones	1 - 8			

*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.







shown with optional 12" duct cover

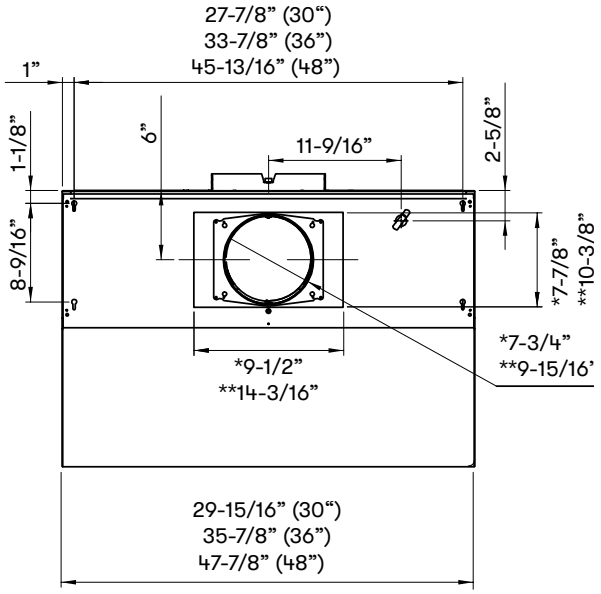

TOP

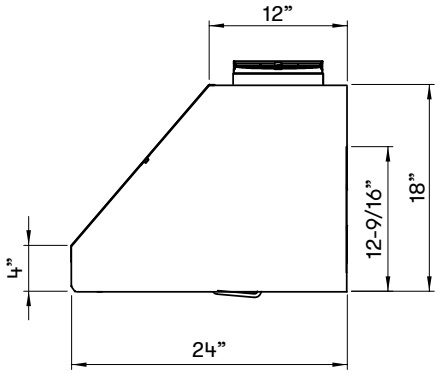

SIDE

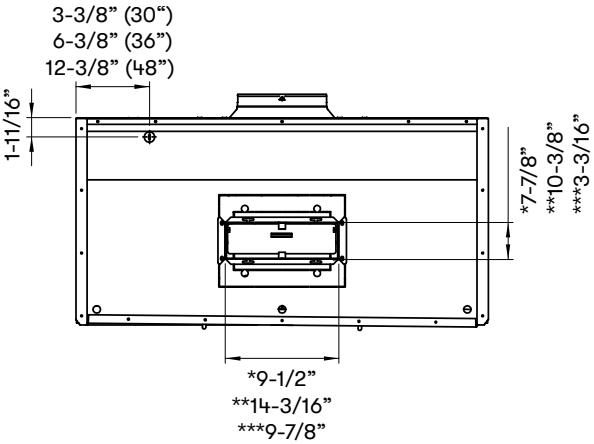

BACK

* 8" round ducting
** 10" round ducting
*** Rectangular ducting

ZEPHYR

ZEPHYRONLINE.COM

MODEL			
Stainless Steel	AK7400AS	AK7436AS	AK7448AS
Size	30”	36”	48”
BLOWER PERFORMANCE			
Included Blower CFM (Min. - Max.)	200 - 700	200 - 700	200 - 700
Sones (Min. - Max.)	0.8 - 6	0.8 - 6	0.8 - 6
ACT 590 CFM (Min. - Max.)	200 - 590	200 - 590	200 - 590
ACT 390 CFM (Min. - Max.)	200 - 390	200 - 390	200 - 390
ACT 290 CFM (Min. - Max.)	200 - 290	200 - 290	200 - 290
Optional Dual Blower (Min. - Max.)	300 - 1,300, 1-8 Sones	300 - 1,300, 1-8 Sones	300 - 1,300, 1-8 Sones
FEATURES			
ACT™ Technology	590, 390, 290, Single Blower Only	590, 390, 290, Single Blower Only	590, 390, 290, Single Blower Only
Controls	Proximity Touch	Proximity Touch	Proximity Touch
Speed Levels	6*	6*	6*
Auto Delay-Off	Yes	Yes	Yes
CleanAir Function	Yes	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2	LumiLight LED, 6W x4
Tri-Level Lighting	Yes	Yes	Yes
Filters	Pro Baffle x2	Pro Baffle x2	Pro Baffle x3
Recirculating Option**	Yes	Yes	Yes
ADA Compliant	Yes, with remote accessory	Yes, with remote accessory	Yes, with remote accessory
DUCT SPECIFICATIONS	8” Rou		
Vertical Single Internal Blower	nd	8” Round	8” Round
Horizontal Single Internal Blower	3-1/4” x 10” or 8” Round	3-1/4” x 10” or 8” Round	3-1/4” x 10” or 8” Round
Vertical Dual Internal Blower	10” Round	10” Round	10” Round
Horizontal Dual Internal Blower	10” Round	10” Round	10” Round
AC POWER (Single Blower)	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A	120V, 60Hz at Max. 5A
AC POWER (Dual Blower)	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A	120V, 60Hz at Max. 9A
OPTIONAL ACCESSORIES			
12” Duct Cover	AK0720	AK0726	AK0728
24” Duct Cover	AK1720	AK1726	AK1728
Wireless Remote Control	14000005	14000005	14000005
Dual Internal Blower	PBD-1300B	PBD-1300B	PBD-1300B
Recirculating Kit	ZRC-7000C	ZRC-7036C	ZRC-7048C
Stainless Steel Telescopic Backsplash	AK1710	AK1716	AK1718
Make-Up Air Kit (Single Blower)	MUA008A	MUA008A	MUA008A
Make-Up Air Kit (Dual Blower)	MUA010A	MUA010A	MUA010A
MOUNTING HEIGHT RANGE***	24” - 36”	24” - 36”	24” - 36”
WARRANTY	3 years parts, 1 year labor	3 years parts, 1 year labor	3 years parts, 1 year labor

*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 5 speeds, ACT 390 CFM = 4 speeds and ACT 290 CFM = 3 speeds.
**Recirculating kit includes a return-air box which adds an additional 4” to the hood height. Recirculating kit is only compatible with single blower.
***Mounting height refers to distance between top of a 36” tall cooking surface and bottom of hood.

ACT™

Airflow Control Technology™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

PowerWave™

PowerWave™ 3-Phase Blower Technology
delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

OCT26.0101

c UL us