

Care & Maintenance

For Stainless Steel Sinks

Daily Care

For best results, rinse sink after each use

Wipe off with soft sponge or cloth

Do not use steel wool or abrasive cleaners as ammonia and bleach


Do not leave pots, utensils, or standing water in the sink

Deeper Clean


Use water and mild liquid detergent (ammonia-free)

Apply cleaner with soft sponge, rinse, and pat dry with microfiber cloth


Polish sink with recommended stainless steel cleaner to retain luster




721001-30




721001-32




721002-30



721002-32



721003-33-55




721003-33-64

Note:

Specialized tools may be necessary to install Stainless Steel Undermount sink with countertop materials other than wood, marble, or granite.

DO NOT DISCARD


IMPORTANT INFO INSIDE

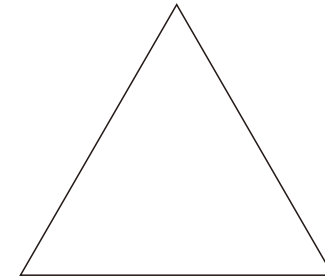


DO NOT RETURN TO STORE

If you have any problems about the product, please do not hesitate to contact us firstly (which is important to us), we will try our best to solve your problem. Please contact our customer service team service@wowowfaucet.com


If for any reason this product does not meet your expectations, please be sure to repack this product in the original box and packaging material to avoid delays in the return process.

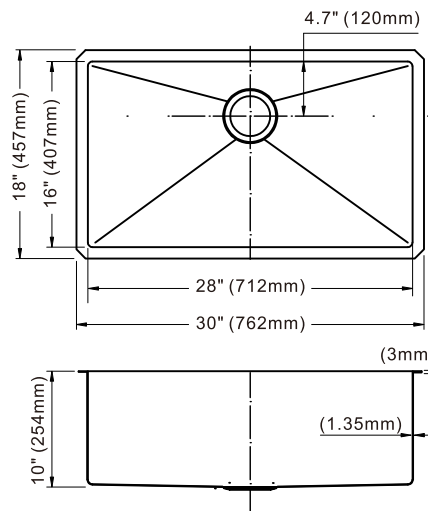


721001-30
721002-30
 30"x18"x10"
 Min Cabinet Size:36"

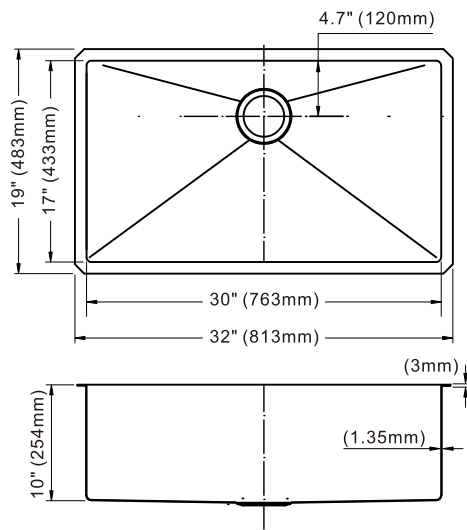

721001-32
721002-32
 32"x19"x10"
 Min Cabinet Size:36"

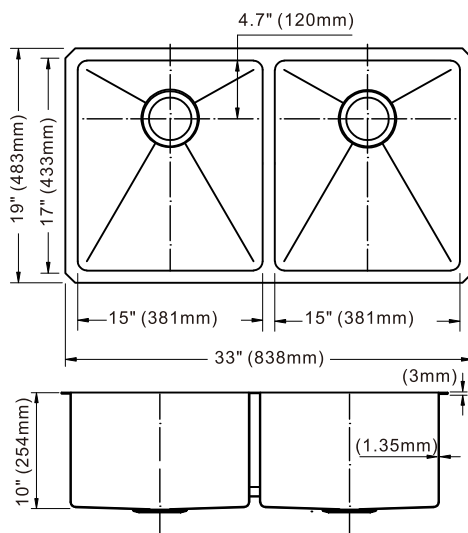

721003-33-55
 33"x19"x10"
 Min Cabinet Size:36"

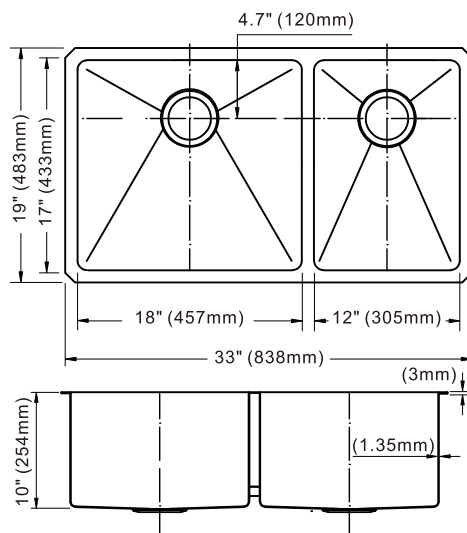

721003-33-64
 33"x19"x10"
 Min Cabinet Size:36"


9. Attach Mounting Hardware

Attach mounting hardware to secure bowl .

Remove excess sealant from inside lip

Set the sealant for 30-60 minutes

Note: use acetone or rubbing alcohols to remove excess sealant

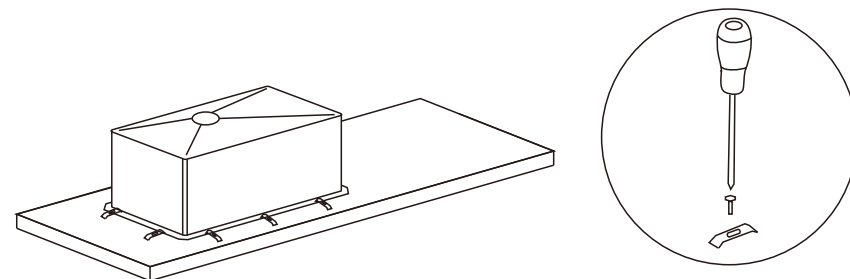


10. Install Plumbing Fixtures

Connect drain to sink and then connect trap to drain.

Connect water supply to faucet according to manufacturer's instructions.


Run water into sink and check if any leakage.

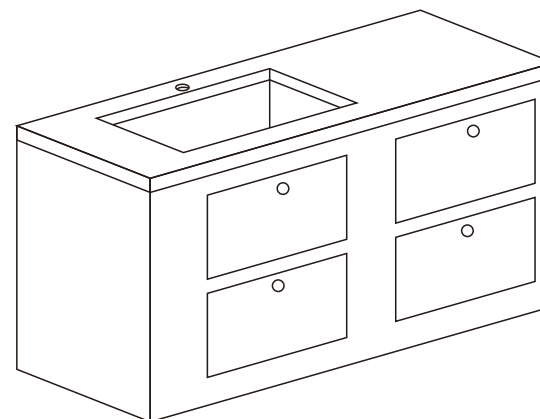

7. Install Anchors

7/Install Anchors


Insert anchors into drilled holes and lightly tap with a hammer until it flush

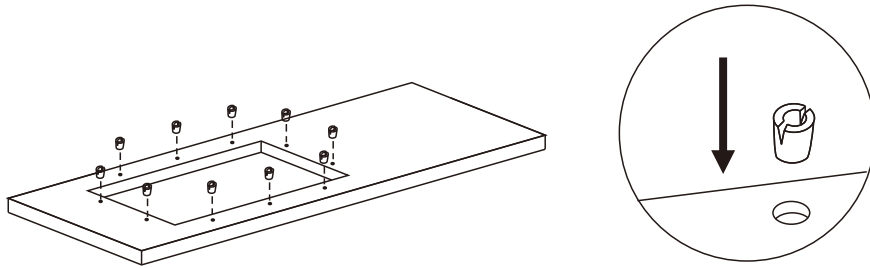


1. Determine Reveal Type

Use scissors to cut along the line of the paper template for your desired reveal type (Negative, Positive or Flushed Reveal)



3/8" Positive Reveal



Flushed/Zero Reveal




1/8" Negative Reveal

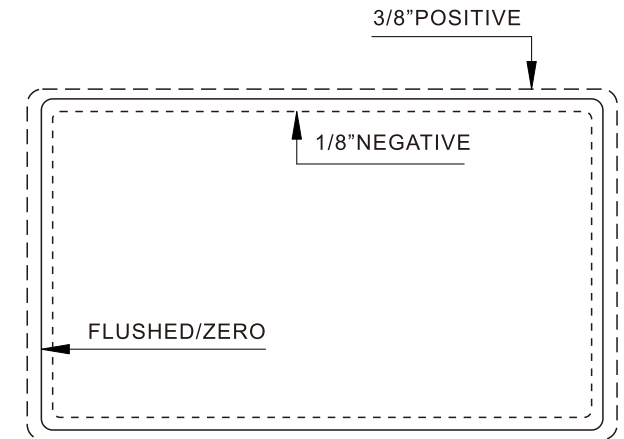

8. Secure Sink to Countertop

Use a bead of silicon (or preferred adhesive) around the rim of the sink. Check the alignment of the sink to the cut-out on the countertop. Place sink over cut-out hole and press firmly

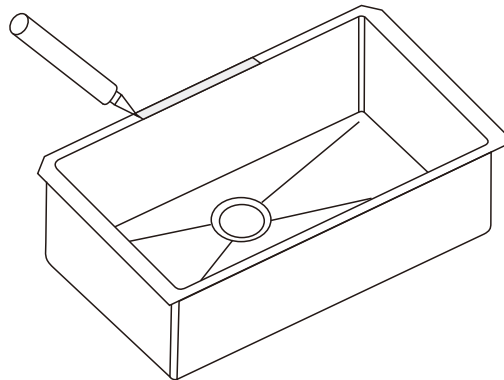


2. Position Template

Check the cut-out

Place the cut-out template in the desired location on the countertop


Note:

Make sure clearance is suitable for back splash , faucet , and plumbing for the sink

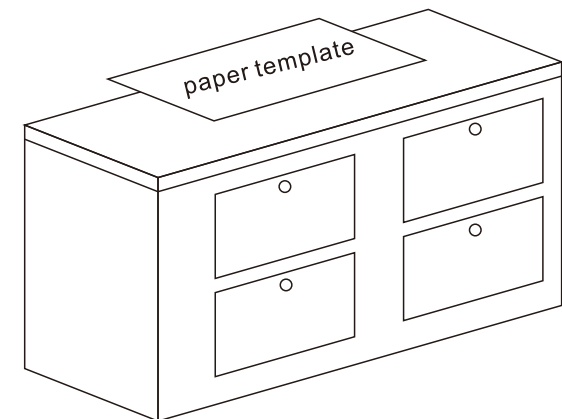

3.Trace Template

Trace template on countertop with a pencil

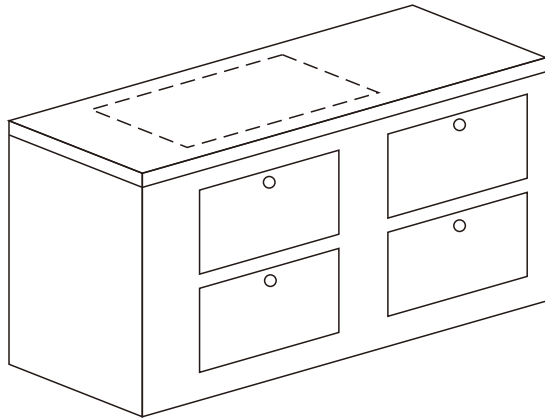


4.Cut countertop

Cut the opening in the countertop by carefully following the traced line

Note:

Please use the appropriate saw that best fit your countertop material


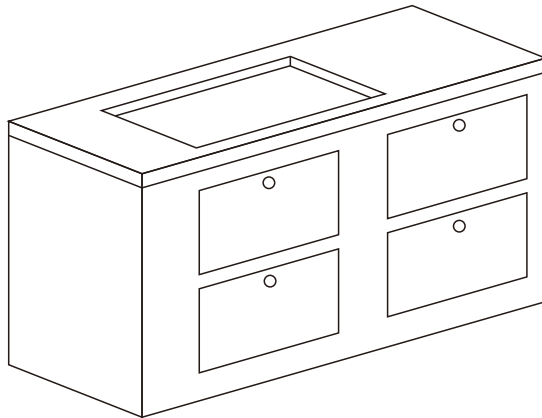


5.Set up Mounting Brackets

Turn countertop over and align sink with countertop.

Decide location for mounting brackets

Mounting holes should be 1/2" edge of sink

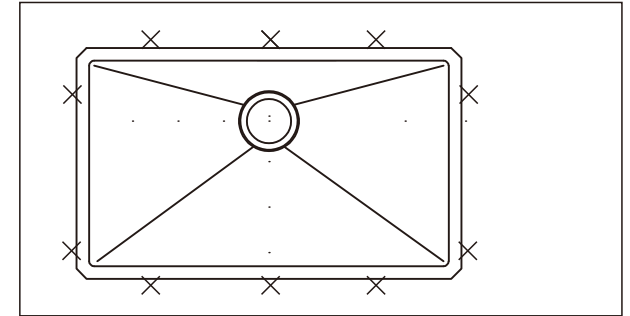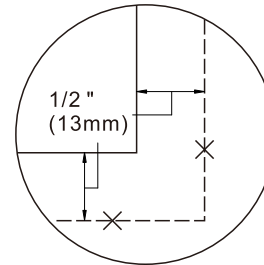

6.Drill hole in countertop

Drill 3/8" diameter x 1/2" deep hole in the countertop

