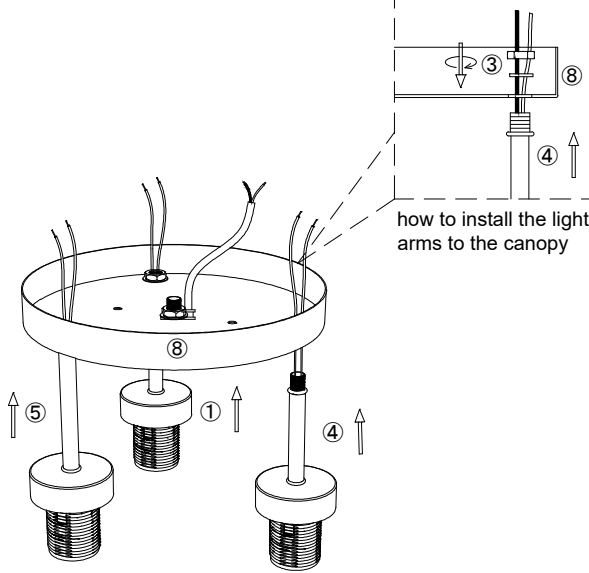
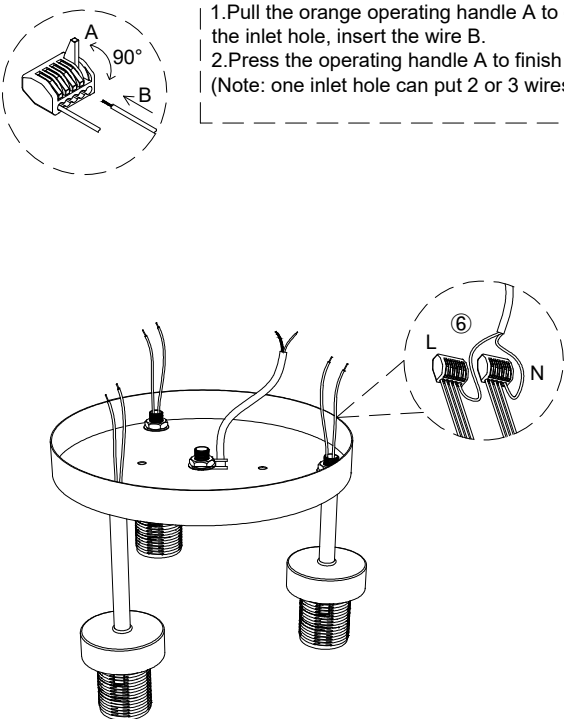
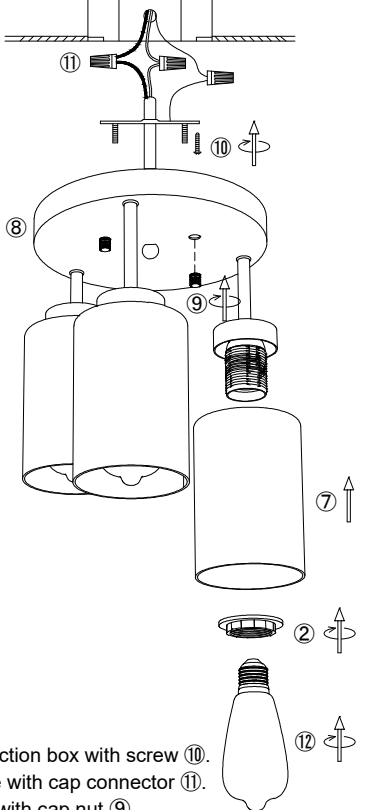


Installation & Assembly

① ② ③ ③ lock nut & teeth lock washer 1pcs ② socket ring 1pcs ① short light arm 1pcs	⑥ splicing connector 2pcs	 how to install the light arms to the canopy 1. Install the light arm ①, light arm ④ and light arm ⑤ to the canopy ⑧ with lock nut & teeth lock washer ③ like picture shown.
② ③ ④ ③ lock nut & teeth lock washer 1pcs ② socket ring 1pcs ④ middle light arm 1pcs	⑦ glass lampshade 3pcs ⑧ canopy 1pcs ⑨ cap nut 2pcs	
② ③ ⑤ ③ lock nut & teeth lock washer 1pcs ② socket ring 1pcs ⑤ long light arm 1pcs	⊗ X 1PCS ⊗ X 1PCS ⚡ X 3PCS ⚡ X 3PCS ⚡ X 3PCS ⚡ X 3PCS	
 1. Pull the orange operating handle A to open the inlet hole, insert the wire B. 2. Press the operating handle A to finish wiring. (Note: one inlet hole can put 2 or 3 wires inside) 2. Connect all the wires with main wire by parallel with connectors ⑥ (all live line-L use one connector, and neutral Line-N use another connector).		 3. Install the bracket to the ceiling junction box with screw ⑩. 4. Connect the wire to your home line with cap connector ⑪. 5. Install the fixture ① to the bracket with cap nut ⑨. 6. Install the lampshade ⑦ to the fixture with socket ring ②. 7. Install the bulb ⑫. (bulbs are not included in the package)

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !