


Assembly & Installation Instructions

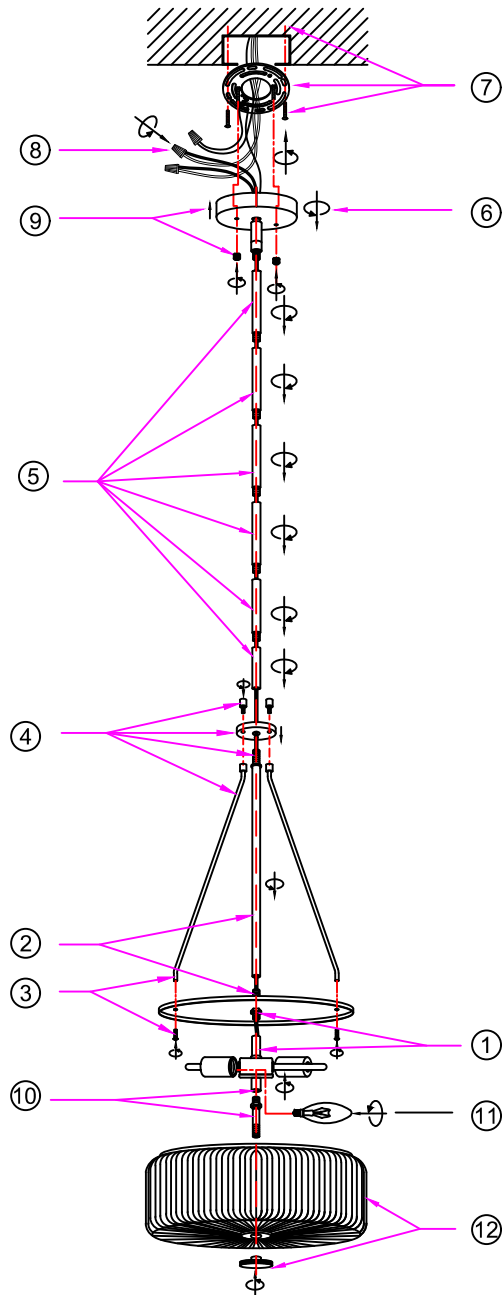

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Pass the power wire through the threaded tube of the canopy plate and screw the lamp body onto the threaded tube.
2. Pass the power wire through the center rod and screw the center rod onto the threaded tube of the canopy plate.
3. Align the three bent tubes with the three holes on the canopy plate and tighten them with screws.
4. Pass the power wire through the metal column, and fit the metal column onto the center rod. Then, align the three holes of the metal column with the three threaded holes of the bent tubes, and screw on the knob caps.
5. Screw the suspension rods onto the lamp body, adding or removing them as needed to adjust the height.
6. Screw the canopy onto the suspension rods.
7. Secure the mounting plate to the junction box with the provided screws.
8. Connect the wires using the wire caps as follows:
 - Connect the fixture's **BLACK** wire to the home **LIVE/HOT** wire.
 - Connect the fixture's **WHITE** wire to the home **NEUTRAL** wire.
 - Connect the fixture's **GREEN** wire to the home **GROUND** wire to the mounting plate with the green screw.

***Note:** Ensure no wire strands are exposed.
9. Secure the canopy to the mounting plate using the knob caps
10. Adjust the height of the suspension rod and tighten it onto the lamp body connector.
11. Install the bulb (not included) into the lamp socket.
12. Secure the glass shade into the canopy plate and screw the metal cover onto suspension rod of the lamp body.
13. Restore the power and check if the bulb works properly.