4. MOUNTING AND WIRING

1. Mount the Mounting Plate

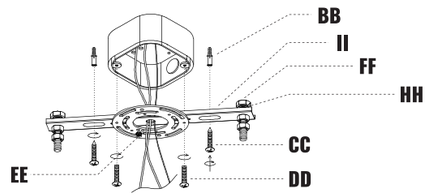

STEP 1: Loosen the cap nut (GG) from the canopy (A), take out the mounting plate (II).
STEP 2: Mark and drill screw holes in the ceiling, then insert the screw anchors (BB).
STEP 3: Take off the screws from outlet box, attach the mounting plate (II) to the box with screws taken off or provided (DD), and then fasten it with wood screws (CC).

2. Connect the Wires

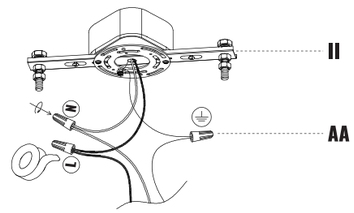



STEP 1: Connect the wires from the fixture to the house supply wires with wire nuts (AA), ground wire (green, green/yellow, or bare copper) to ground wire, neutral wire (white) to neutral wire, and hot wire (black) to hot wire. Wrap the connection with electrical tape.
STEP 2: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other side.

3. Fix the Canopy

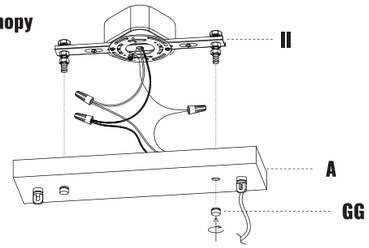

Fix the canopy (A) onto the mounting plate (II) with cap nuts (GG) taken off.

5. ATTACH THE GLASS AND INSTALL BULBS

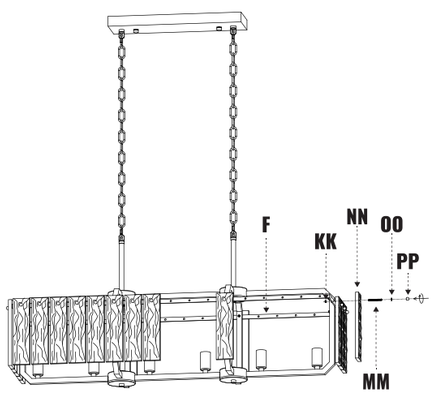

1.Screw the short fixed screws (MM) into the screw caps (PP), and fit the plastic washers (OO) onto them.
2.Attach the other pieces of glass (NN) to the glass holder (F) with screws assembled earlier and M4 nuts (KK) provided.

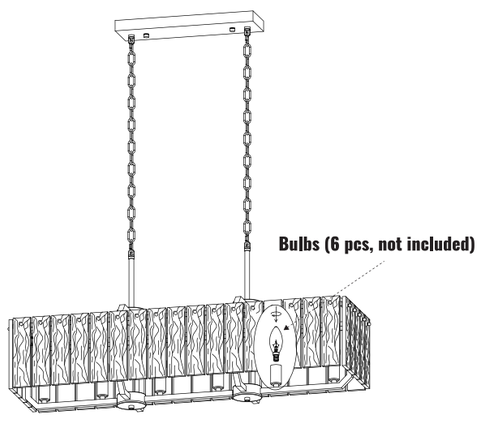

2.Install Bulbs (E12 x 6, Max 40W each, LED recommended)

INSTALLATION MANUAL

CHANDELIER

Model No.: HLP292BL-6A

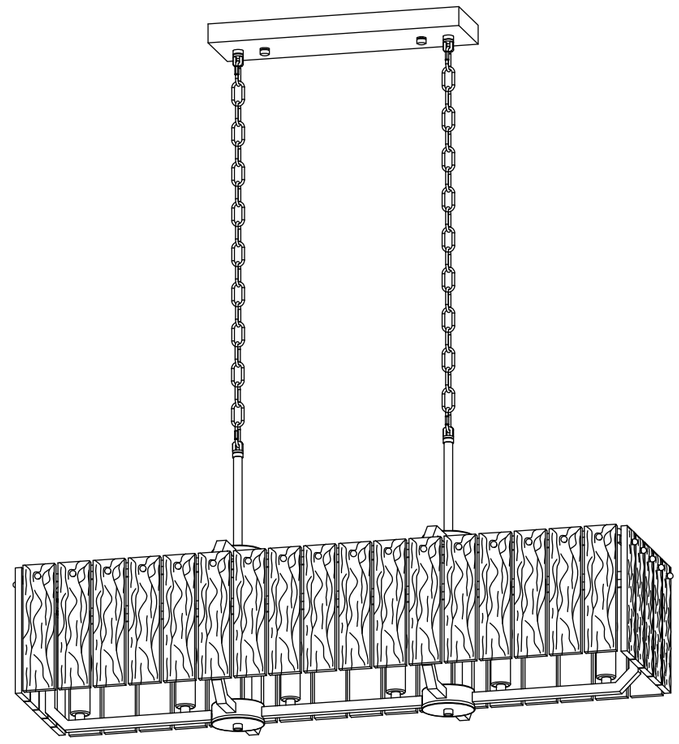

Scan for Installation Video

TOOLS REQUIRED

Ladder



Pliers



Wire Strippers



Screwdrivers

1. PACKING LIST

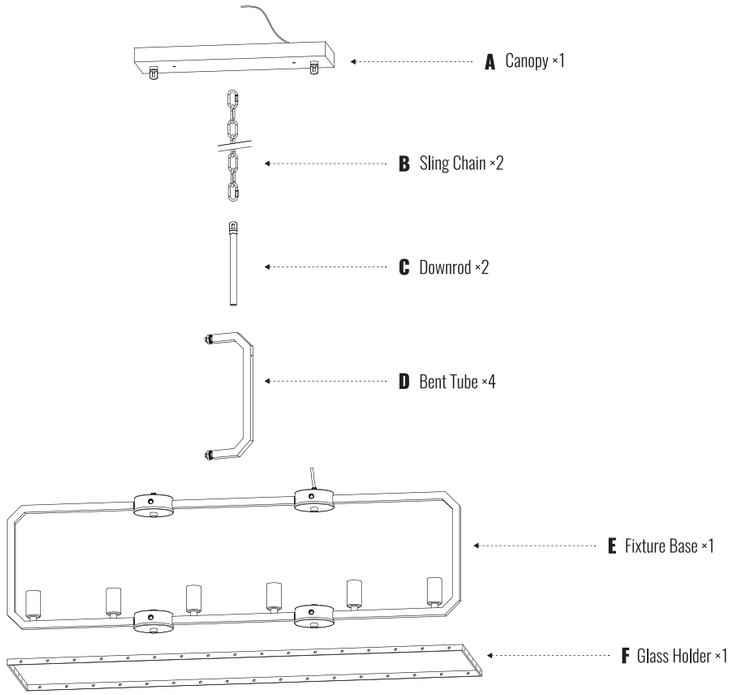

2. INSTALLATION KIT

AA 3×	**BB** 4×	**CC** 4×	**DD** 2×	**EE** 1×	**FF** 2×	**GG** 2×
Wire Nut	Screw Anchor	Wood Screw	Mounting Screw	Ground Screw	Canopy Screw	Cap Nut
HH 2×	**II** 1×	**JJ** 4×	**KK** 44×	**LL** 6×	**MM** 38×	**NN** 44×
Flat Washer	Mounting Plate	M6 Nut	M4 Nut	Long Fixed Screw	Short Fixed Screw	Glass
OO 44×	**PP** 44×	**QQ** 8×	**RR** 8×	**SS** 4×	**TT** 4×	**UU** 1×
Plastic Washer	Screw Cap	M10 Nut	Washer	Cover	Cover Nut	Gloves

NOTE:

1.The glass parts (NN) are fragile and spare parts are included.

2.Parts "EE, FF, GG, HH, II, JJ" have already been pre-installed together with the canopy (A).

3.Parts "SS, TT" have already been installed together with the fixture base (E). You must loosen them before installation. (See STEP 1 in Fixture Assembly)

4.Parts "QQ, RR" have already been installed together with the bent tubes (D). You must loosen them before installation. (See STEP 2 in Fixture Assembly)

6.The light bulbs are not included in the packing list.

3. FIXTURE ASSEMBLY

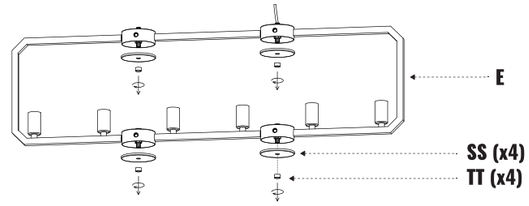

STEP 1: Loosen the cover nuts (TT) and remove the covers (SS) on the fixture base (E).



STEP 2: Loosen the M10 nuts (QQ) and remove the washers (RR) on the bent tube (D).

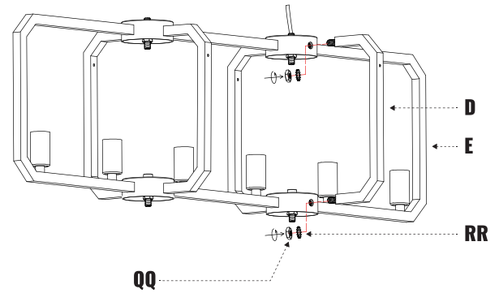

STEP 3: Insert the bent tubes (D) into the holes of the fixture base (E), tighten them with the washers (RR) and M10 nuts (QQ) that were previously removed.

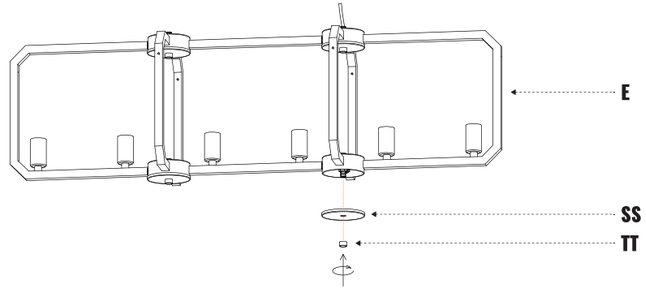

STEP 4: Reinstall the covers (SS) onto the fixture base (E) using the cover nuts (TT) previously removed.

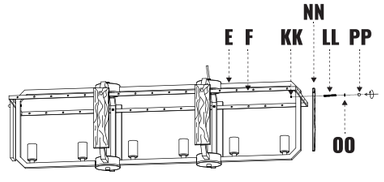

STEP 5: 1.Screw the long fixed screws (LL) into the screw caps (PP), and fit the plastic washers (OO) onto them.
2.Install the glass holder (F) onto the fixture base (E), aligning the holes of the glass holder (F) with those of the fixture base (E).
3.Attach 6 pieces of glass (NN) to the glass holder (F) with screws assembled earlier and M4 nuts (KK) provided.

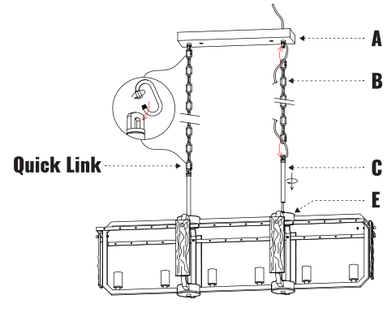

STEP 6: Thread the wires of the fixture through the downrod (C), sling chain (B) and canopy (A), and securely fasten the downrod (C) to the fixture base (E). Loosen the quick links at both ends of the sling chain (B) and attach them separately to the canopy (A) and the downrod (C).