

Assembly instructions

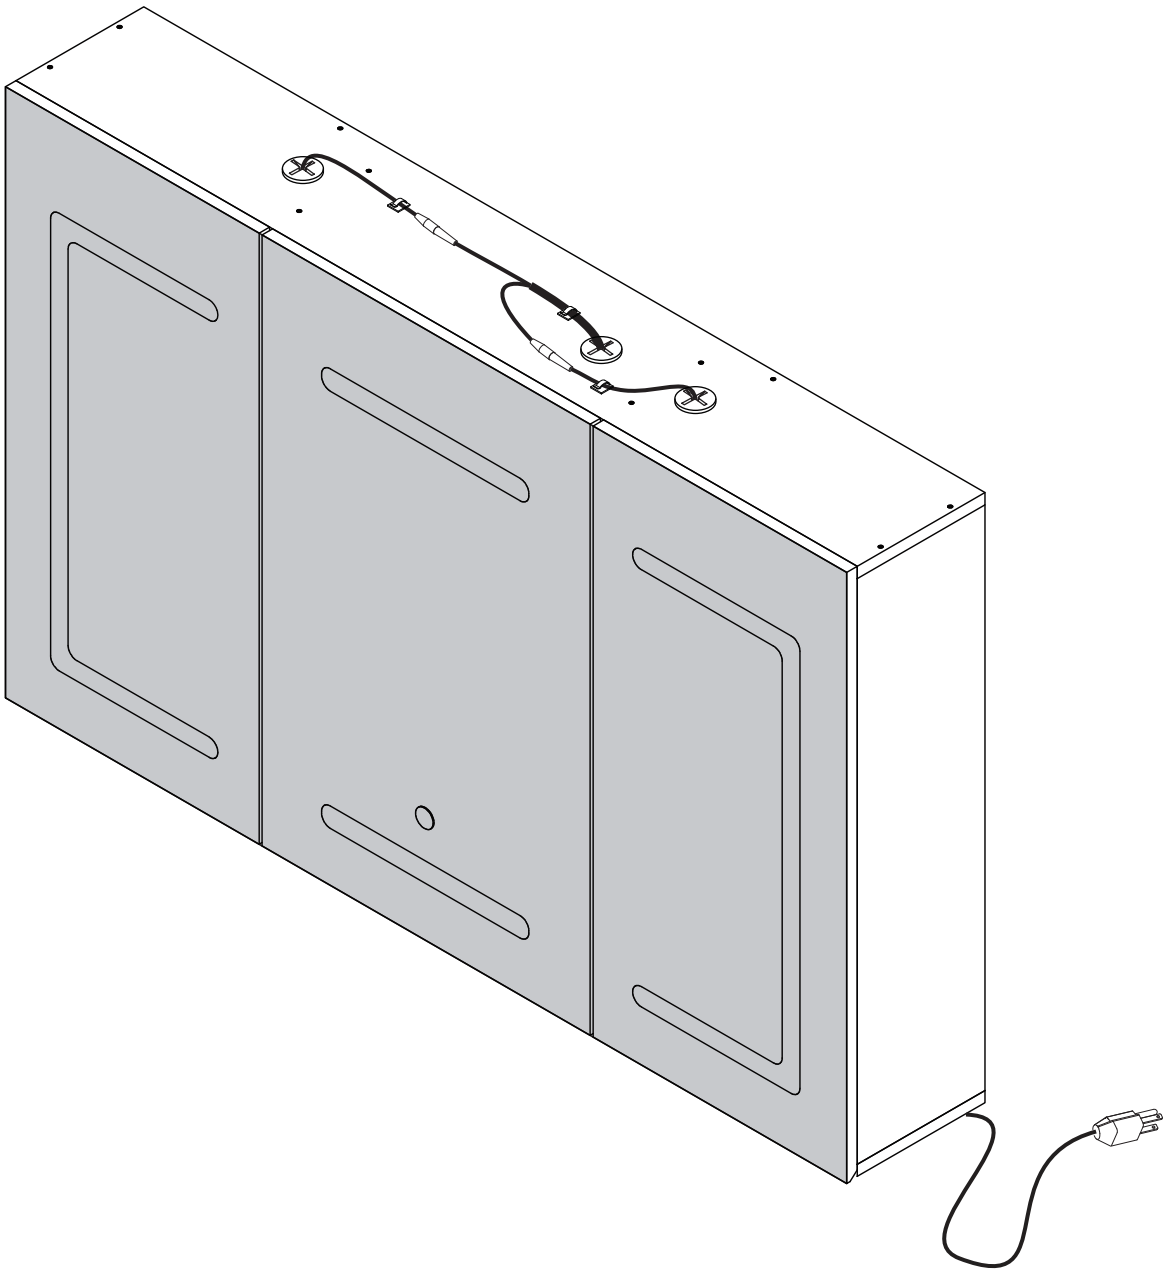


AJ-DJ504965_1

Version： 1.0

1.Installation precautions



2 PERS.

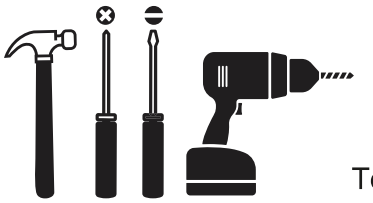


Tools required (not included)

2.Matters needing attention


Cam Lock Fastening System

Insert the cam bolt into the hole first, then insert the cam lock and lock it.


1.



2.





3.




The opening must point toward the edge of the board

4.




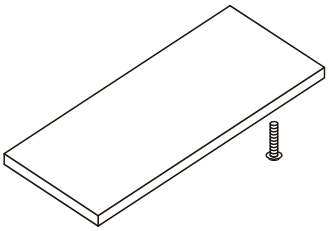


Be sure to use the proper screws to avoid damaging the parts.

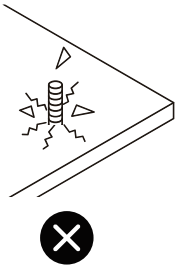


Wrong screws can cause the plank to crack

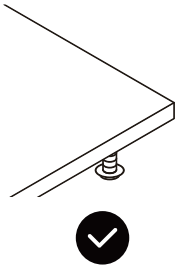


The right screw is the right size

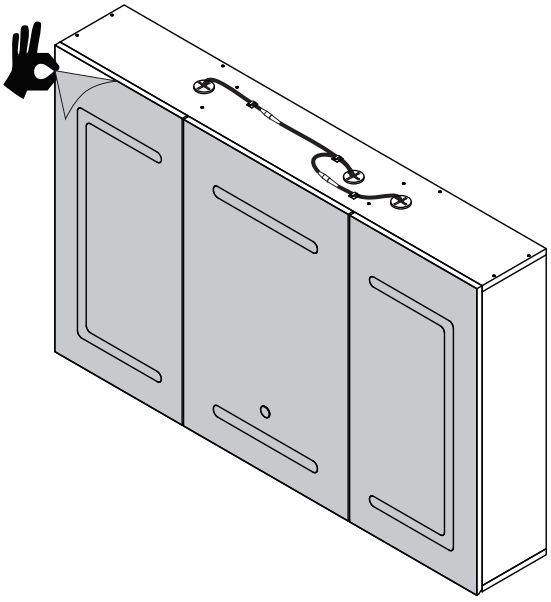


After product assembly is complete, remove the mirror protective film.

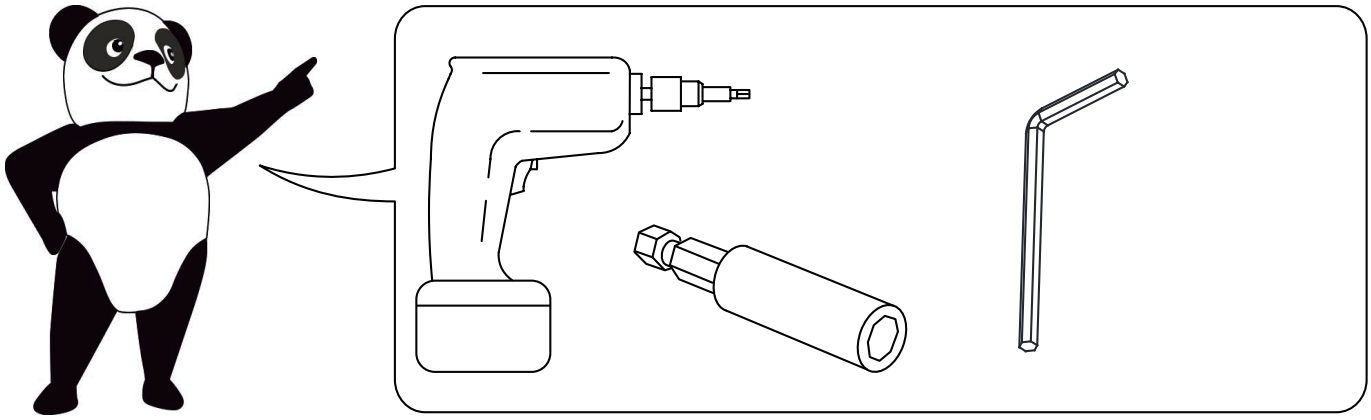


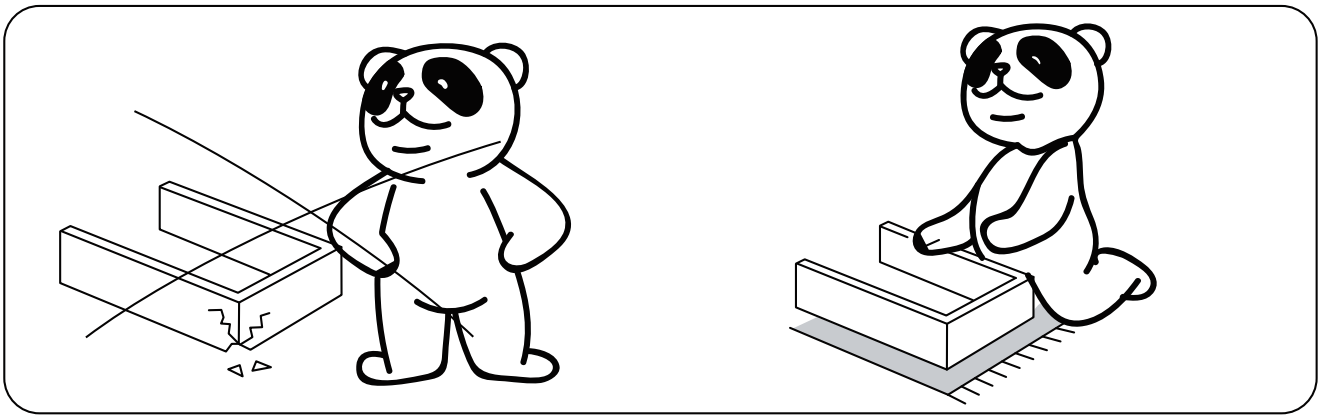

Violent installation is prohibited

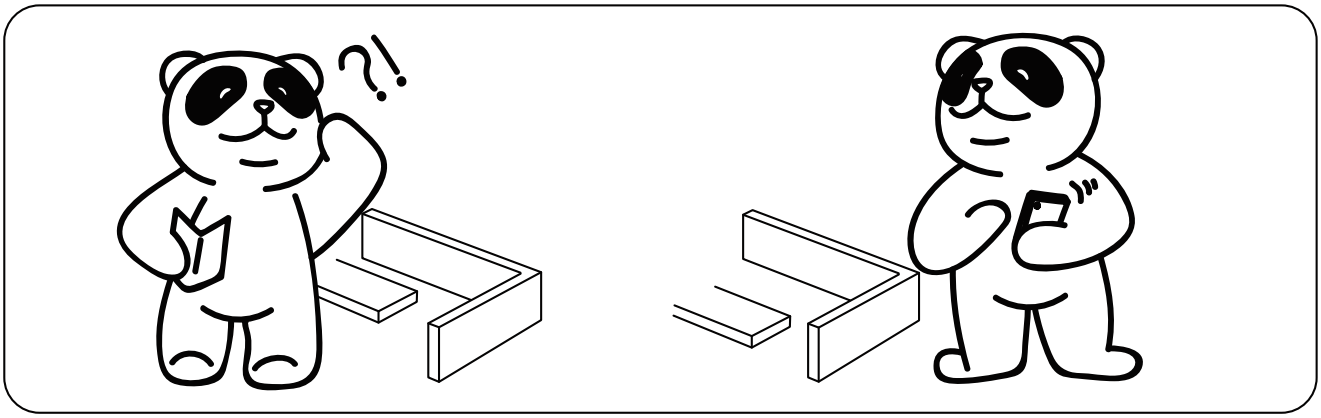


Please call if you need help

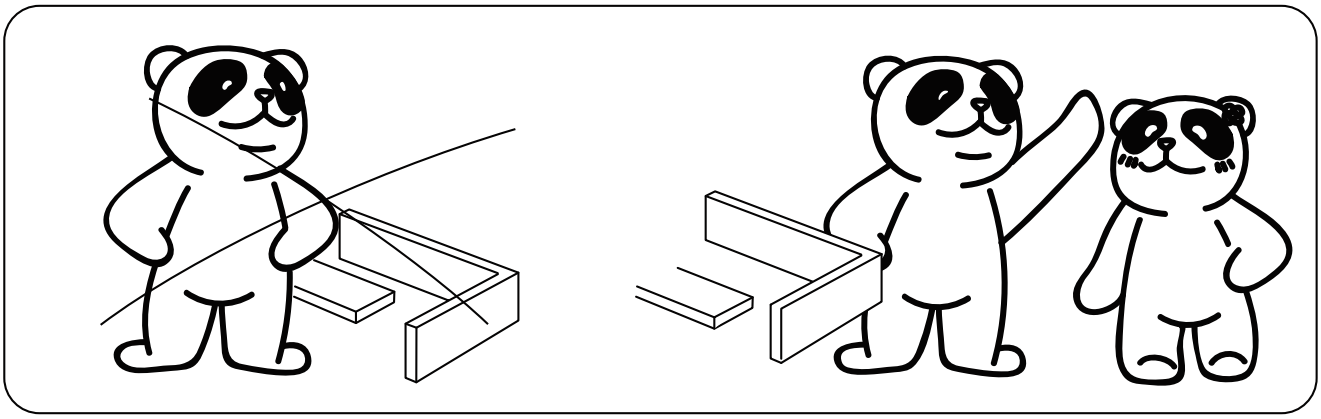

Multi-person cooperation is recommended


Assembly instructions

HARDWARE LIST



Ø6x35mm

A x 5



Ø15x10mm

B x 5




Ø6x30mm

C x 16(+2)




Ø4x14mm

D x 36(+2)




Ø5x 40 mm


E x 20(+2)




F x 12(+1)



G x 1




H x 6



J x 1




K x 3(+1)



Ø4x50mm

L x 3



M x 24




Ø3x12mm

N x 2




Ø10mm

O x 6(+2)



Ø3x14mm

P x 12(+1)




Q x 3(+1)




#4


PARTS LIST




1 x1




2 x1




3 x1




4 x1




5 x1




6 x1




7 x1




8 x1




9 x1




10 x1




11 x1




12 x1




13 x2




14 x1




15 x1



16 x1




17 x1



18 x1


Note:


1. Should be assembled on flat ground to keep balance.




It needs at least two people to install.

Before starting the assembly, you must read the whole manual and follow the instructions

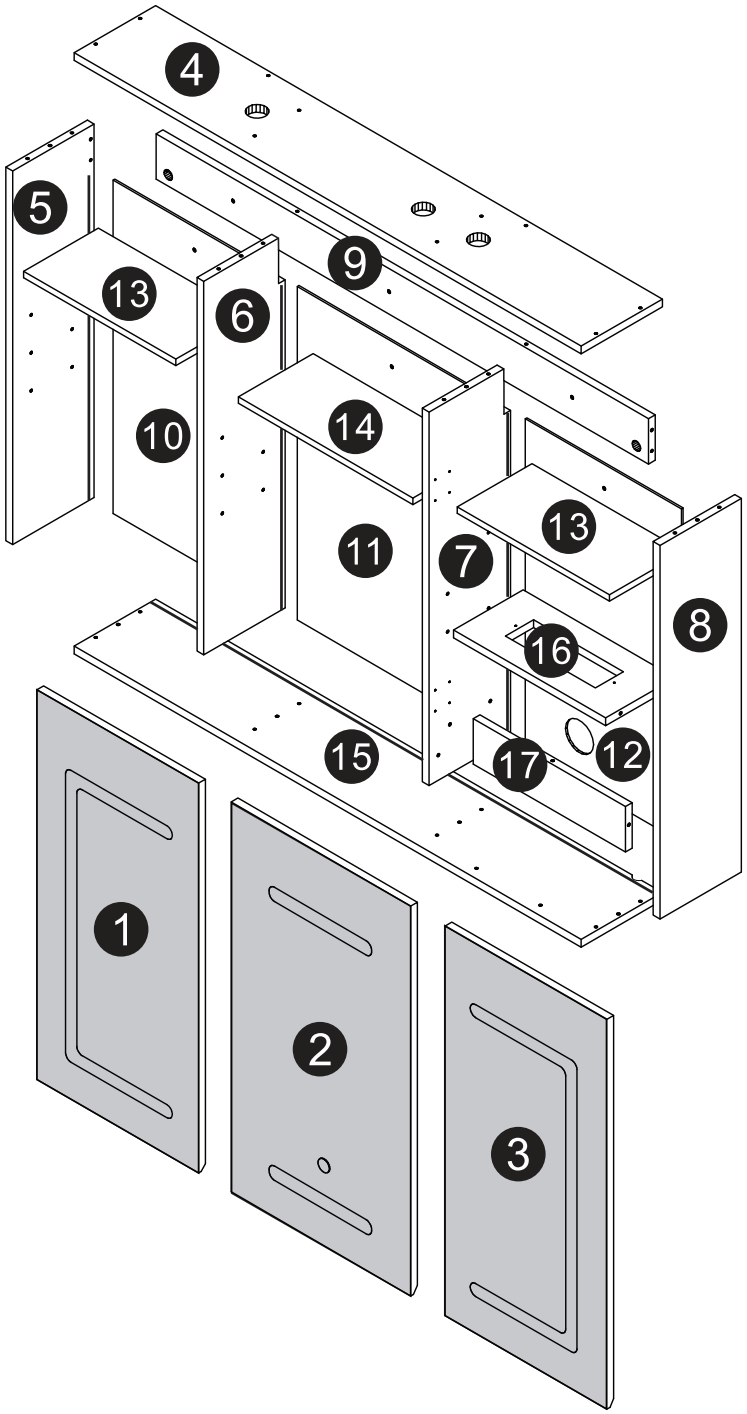


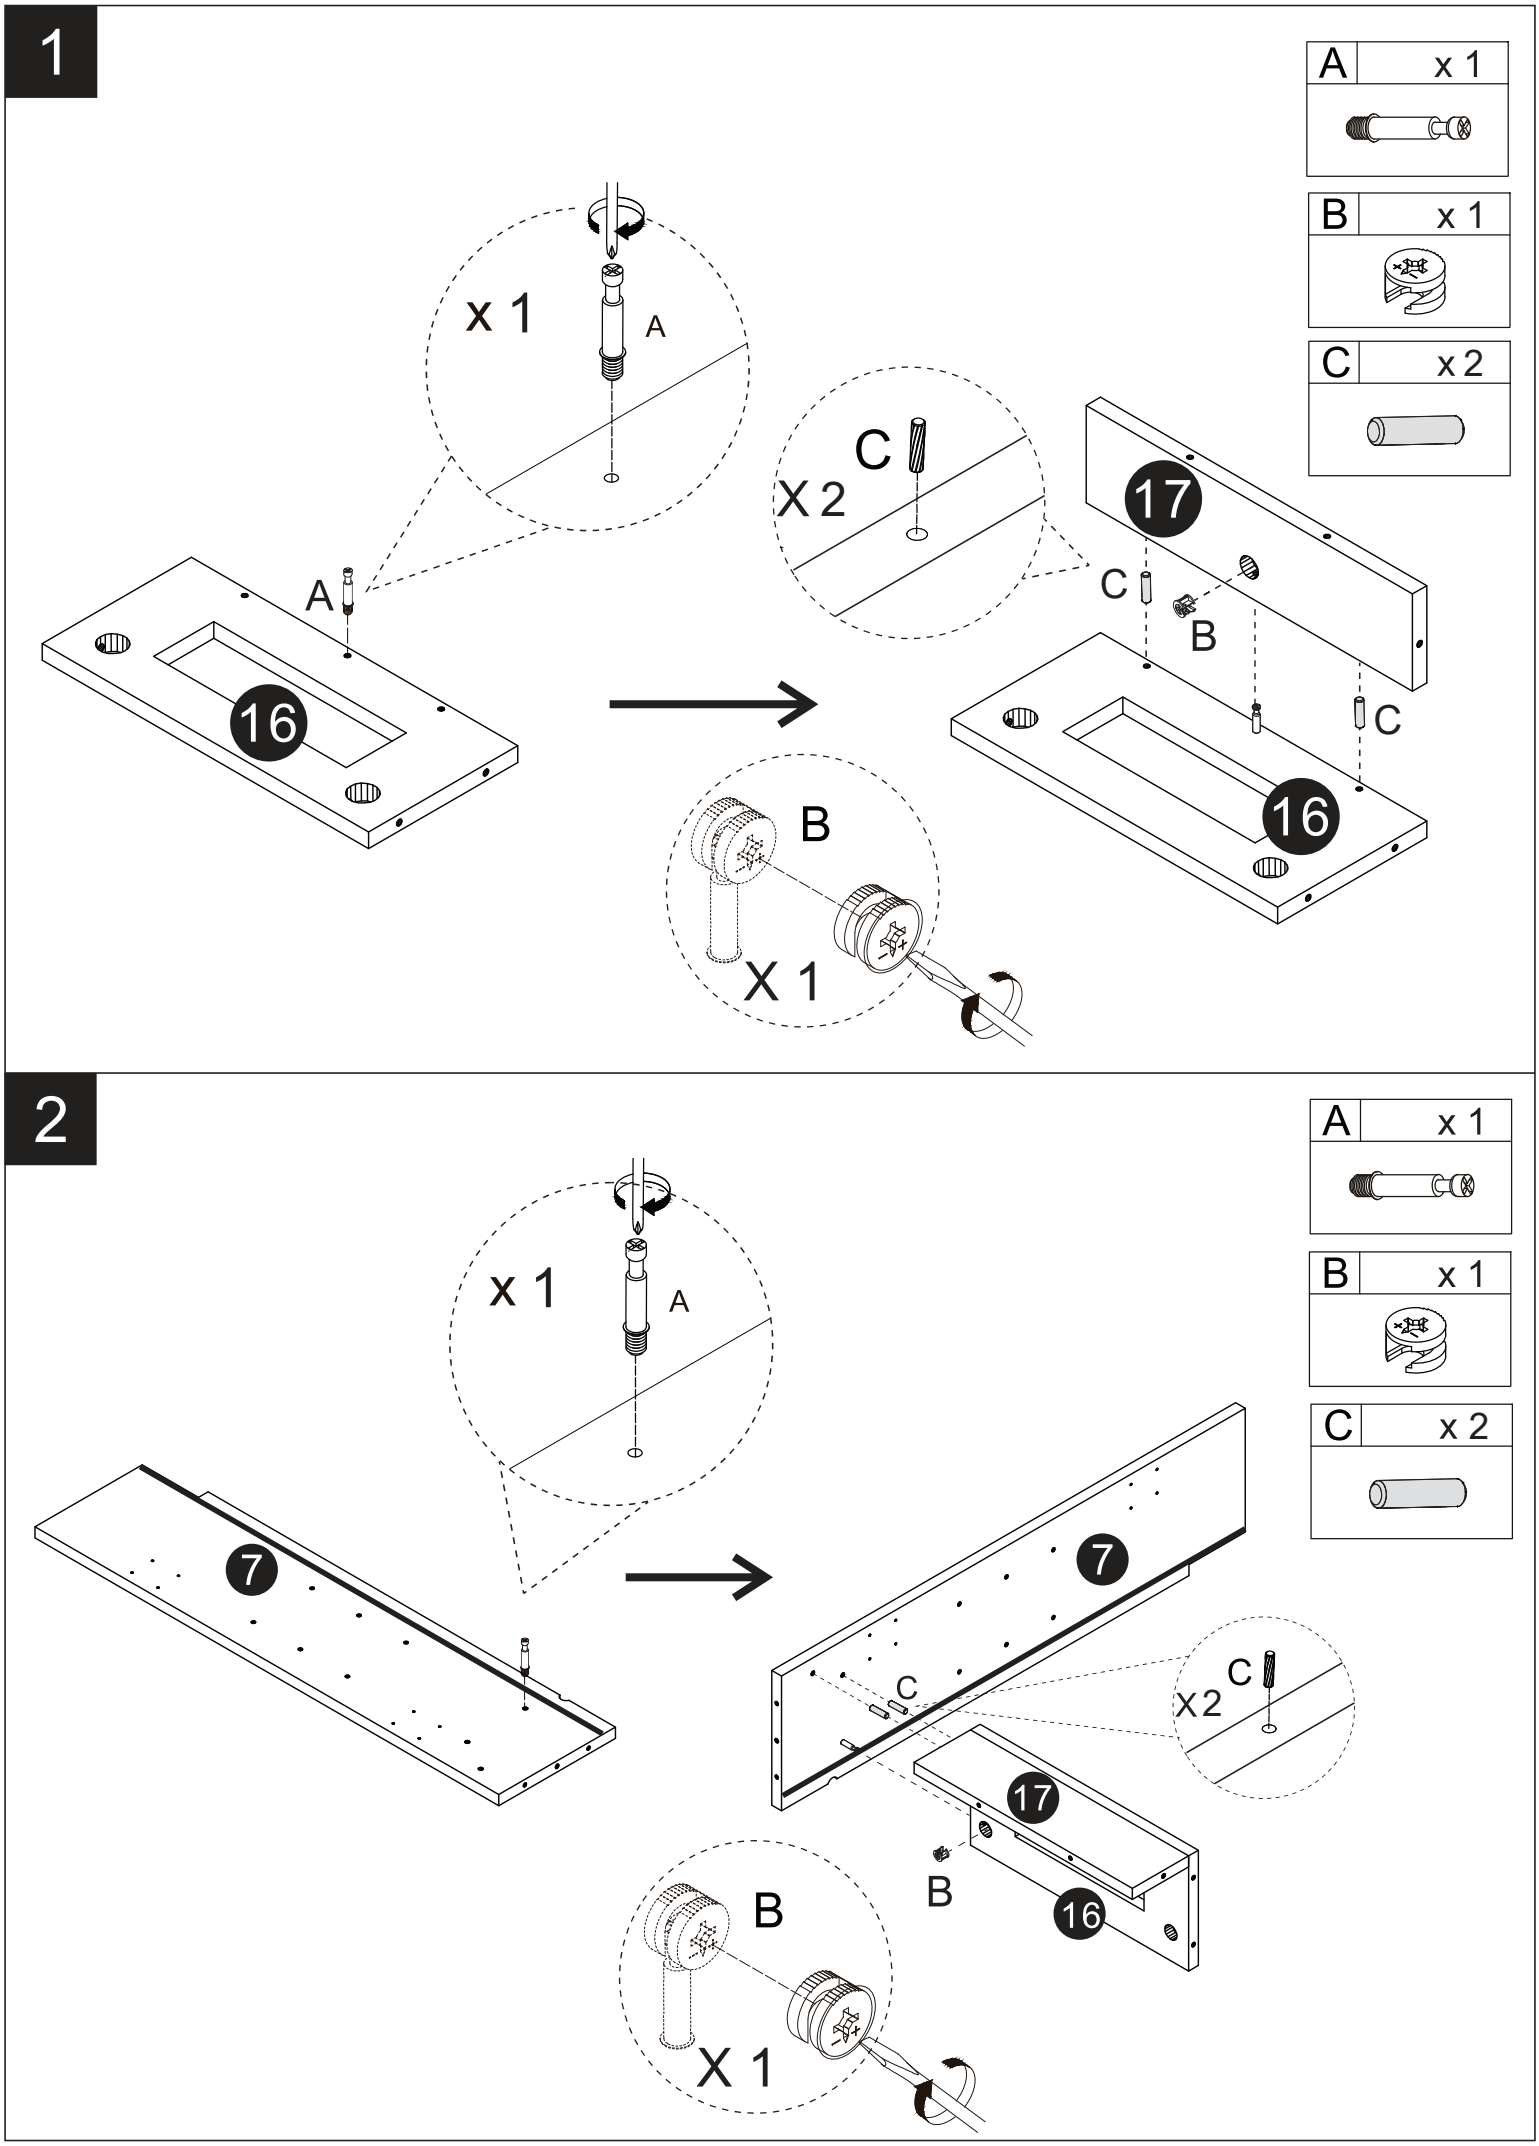
1
A x 1
B x 1
C x 2
x 1
A
C
X 2
17
C
B
C
A
16
16
B
X 1
2
A x 1
B x 1
C x 2
x 1
A
7
7
C
C
X 2
17
B
16
B
X 1


3

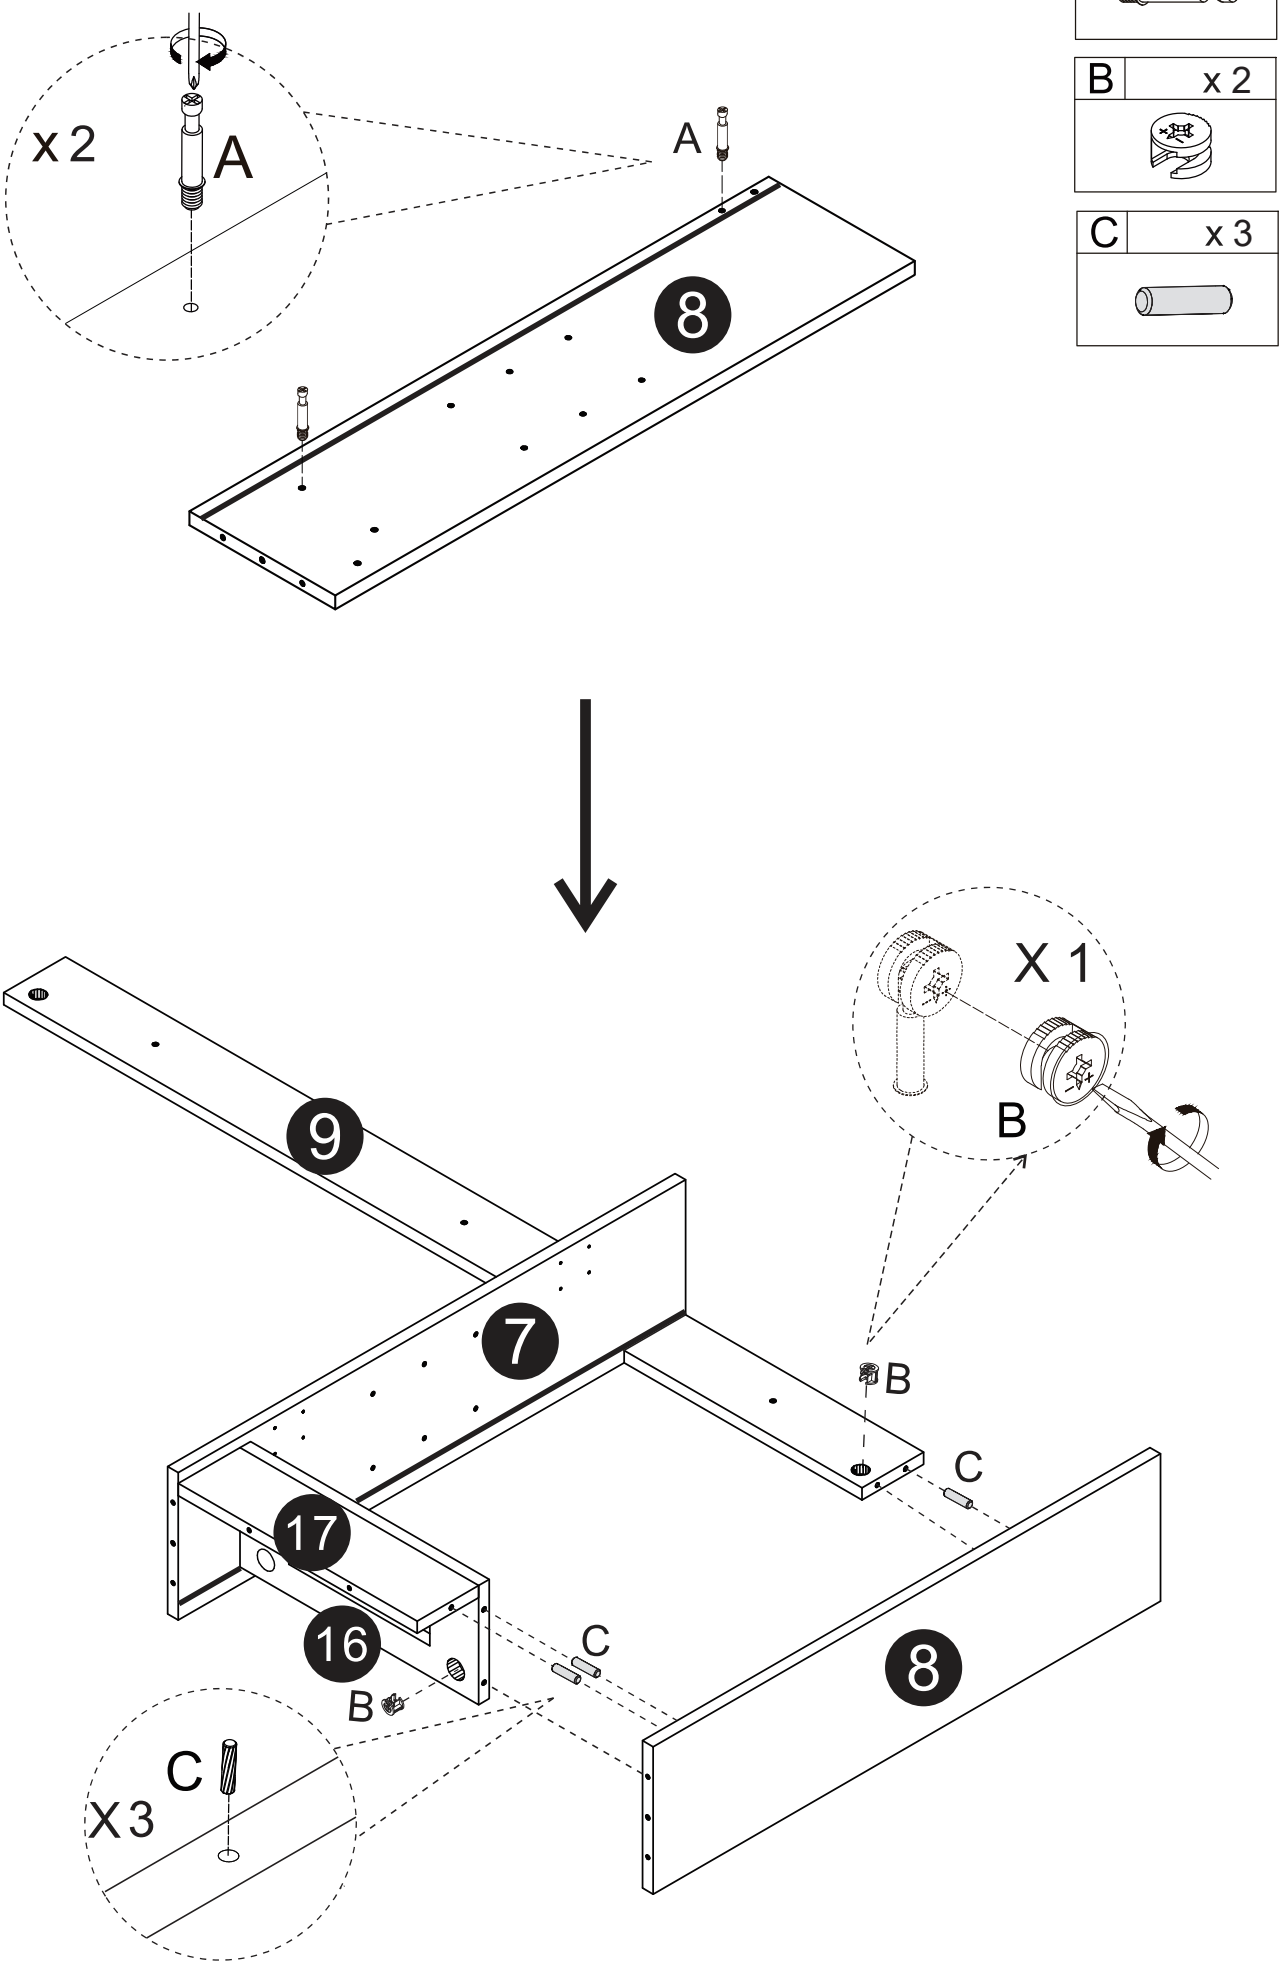


4

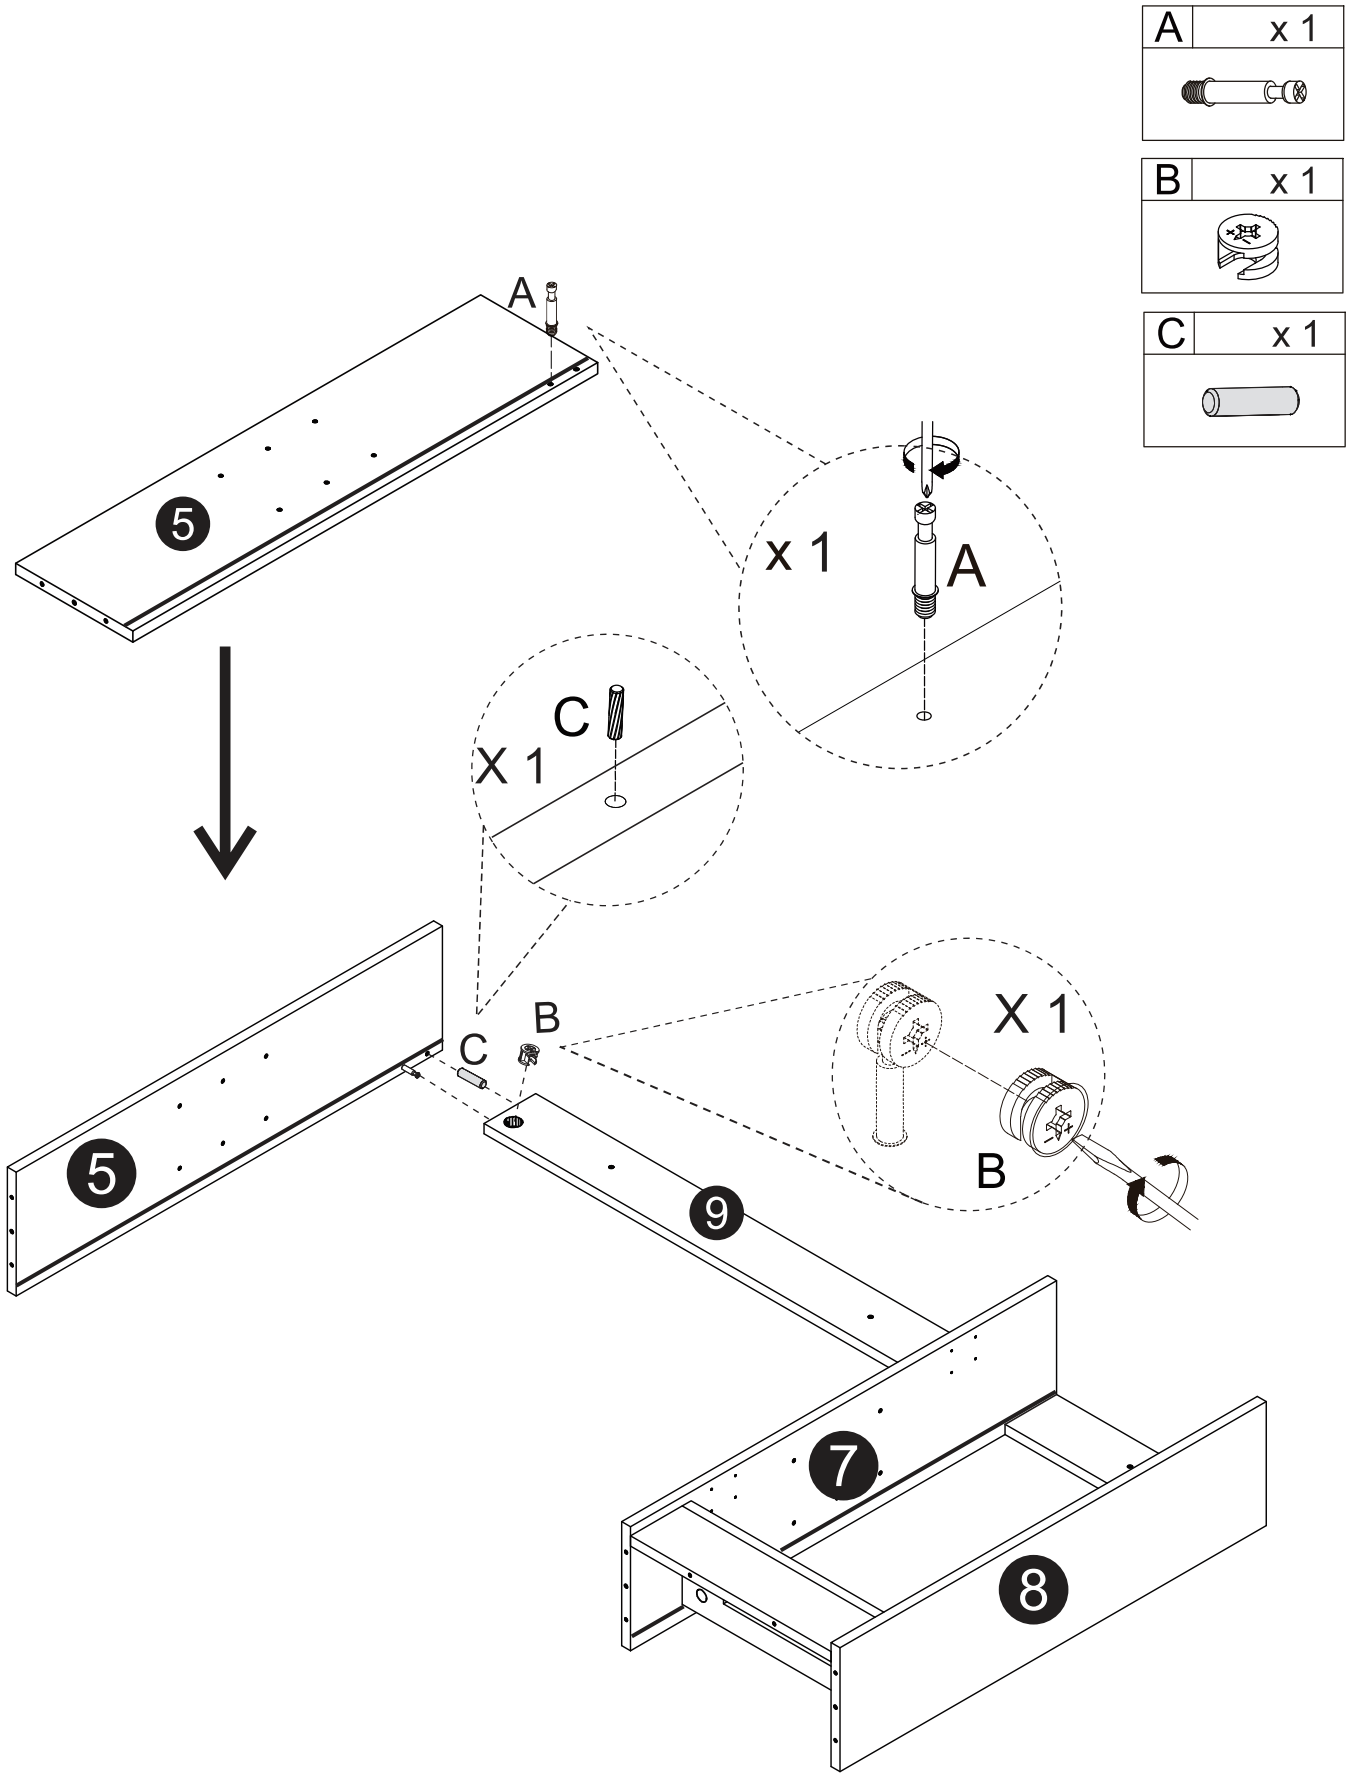


5

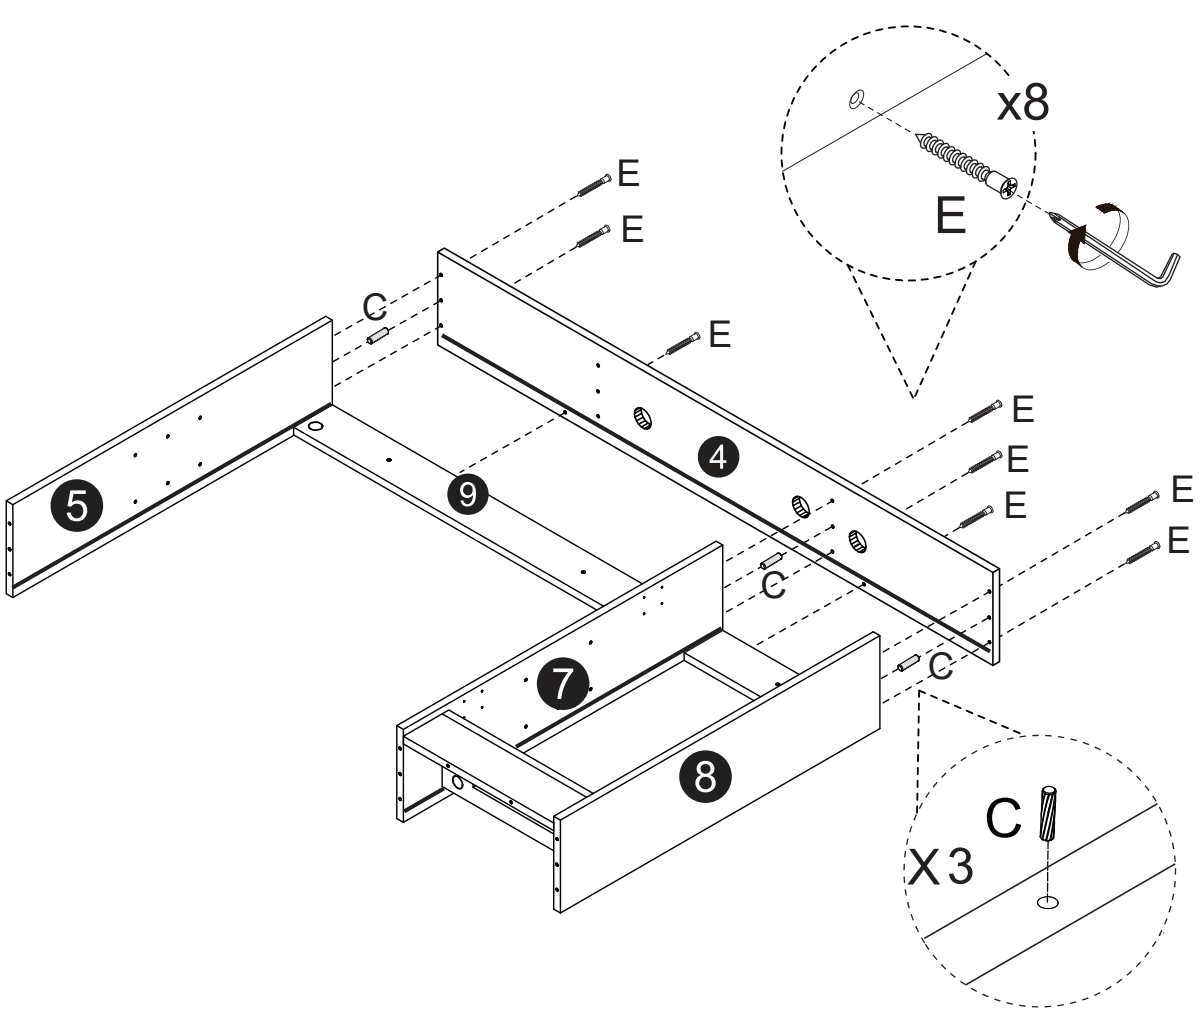

C x 3
E x 8
x 1
x8
E
E
E
C
E
E
E
E
E
E
E
4
5
9
C
7
C
8
X 3
C

6

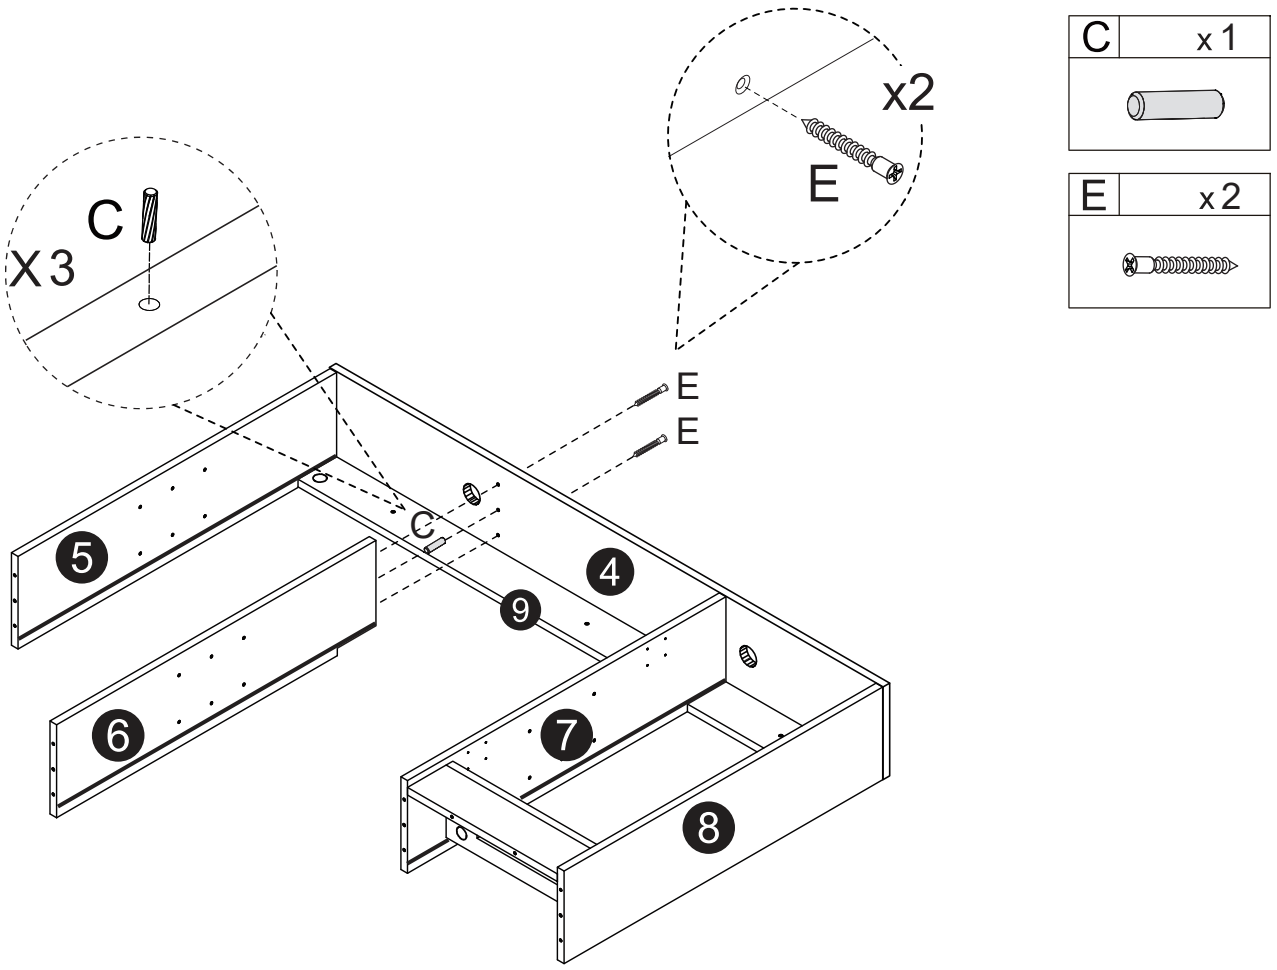

C x 1
E x 2
x2
E
X 3
C
E
E
C
5
4
9
6
7
8

7

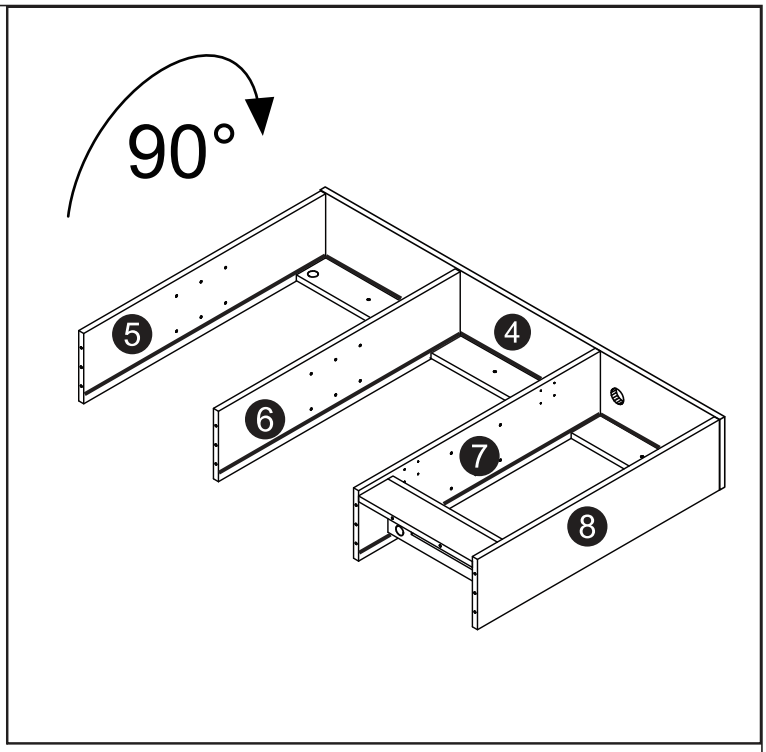

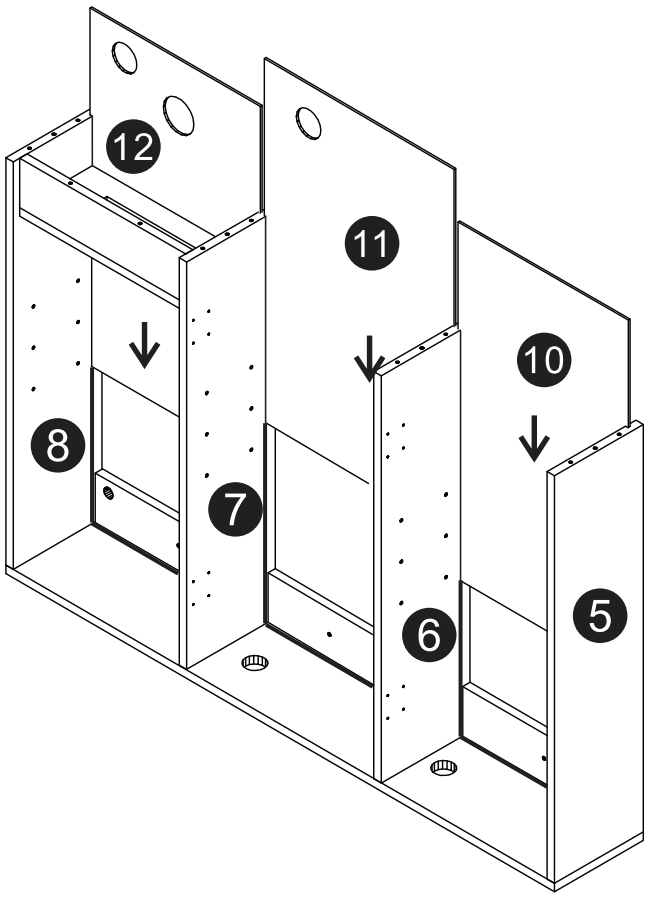


8

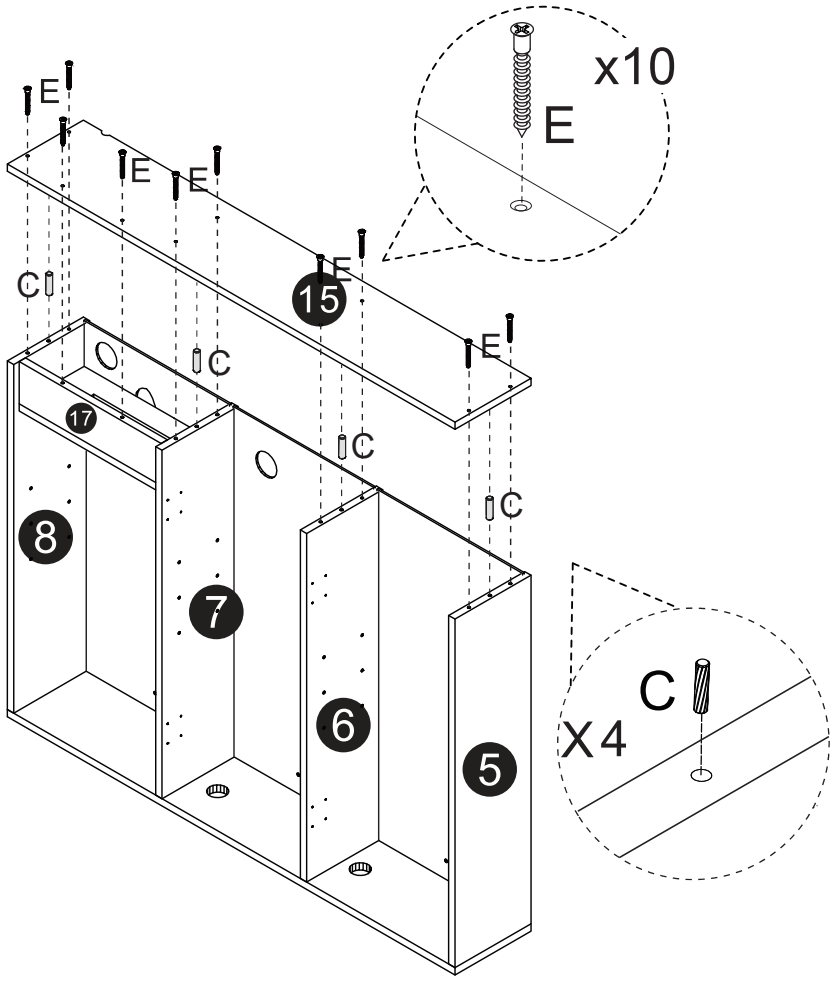

C	x 4


E	x 10


9

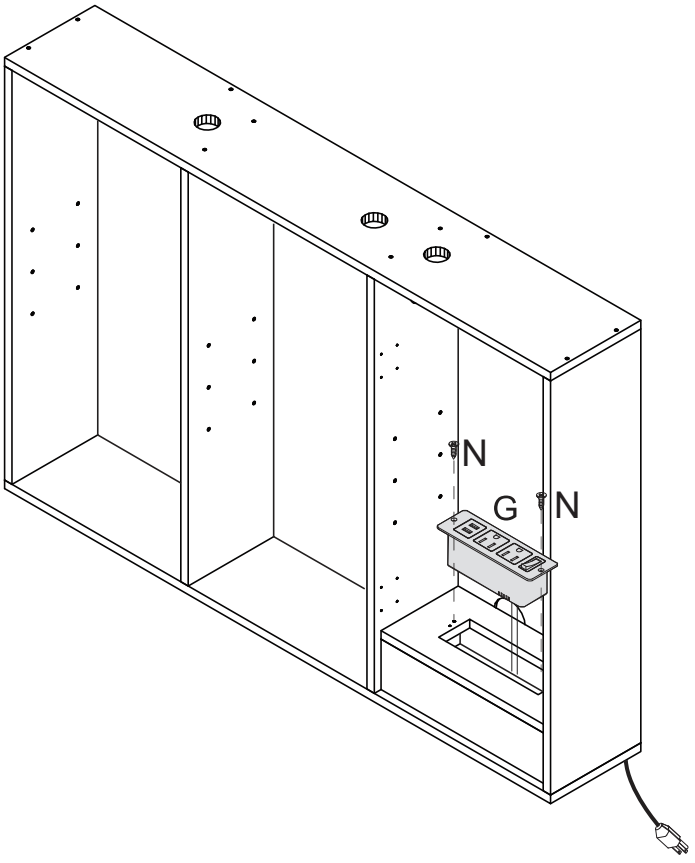


N	x 2

G	x 1

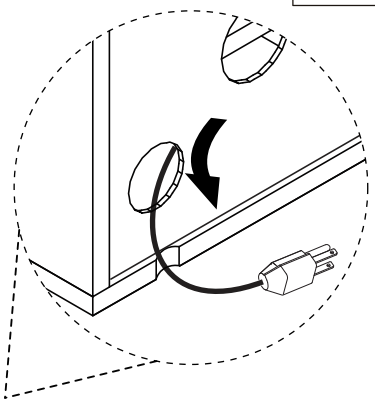


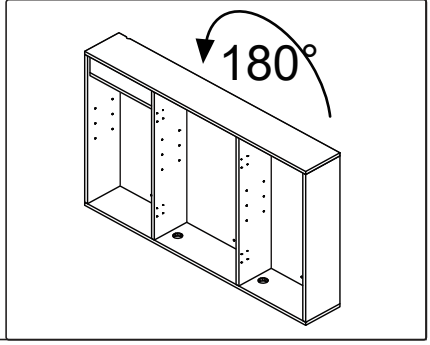


10

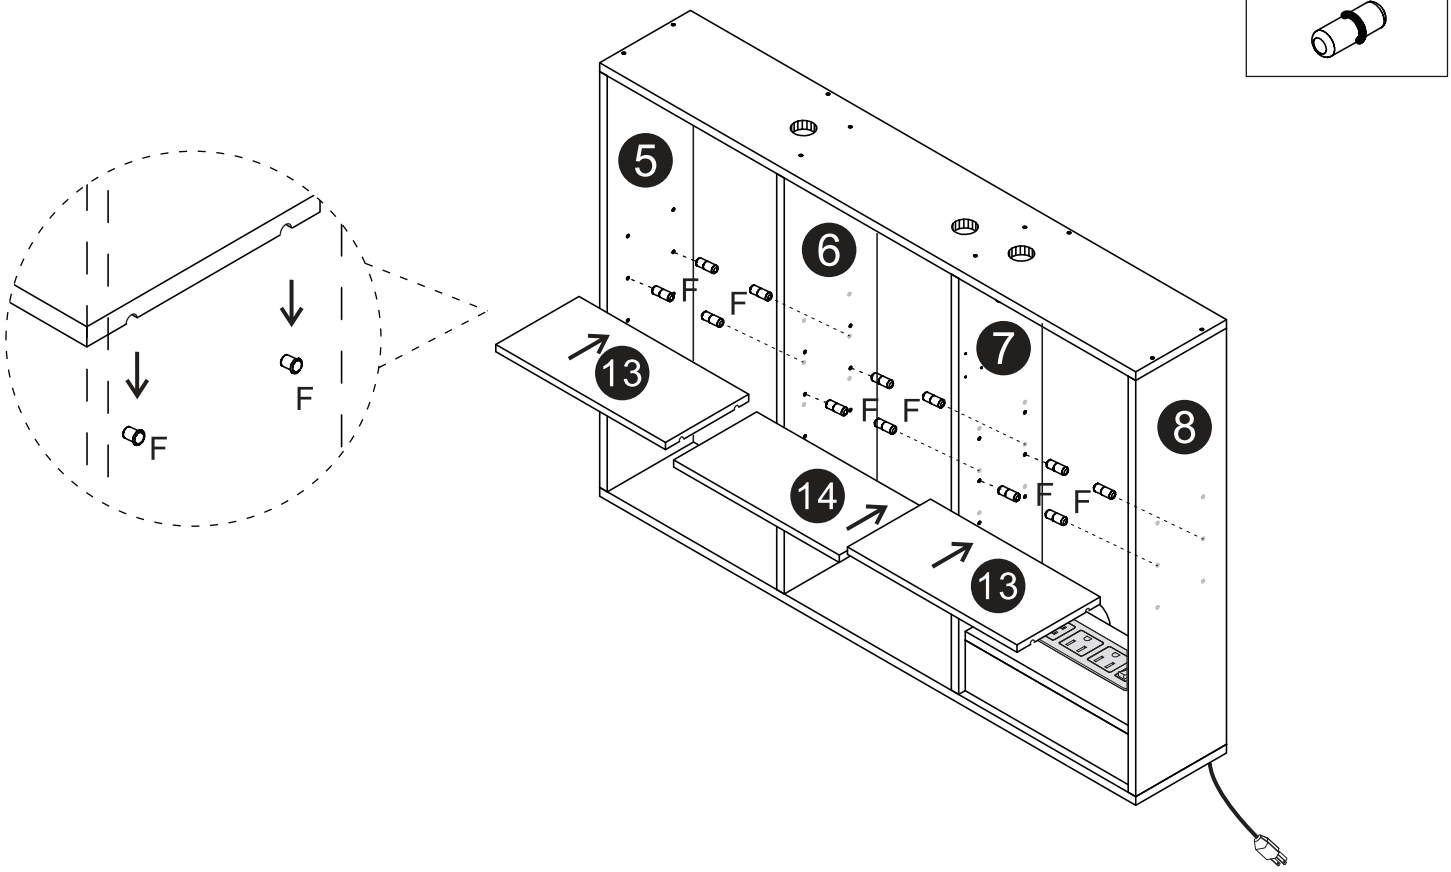



11

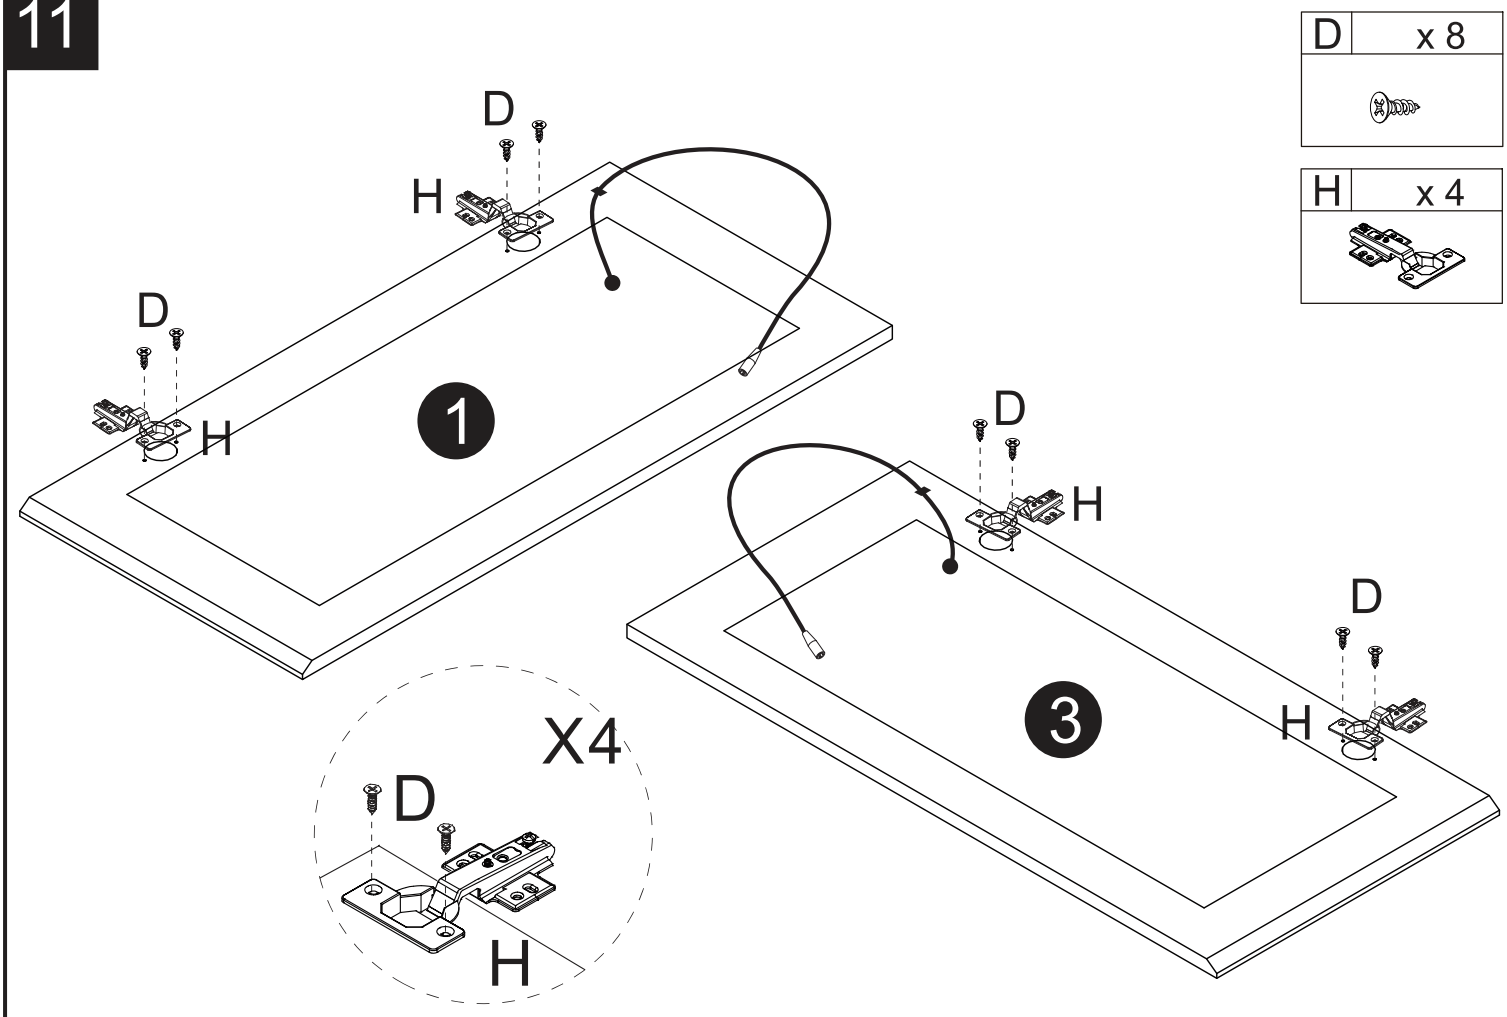


12

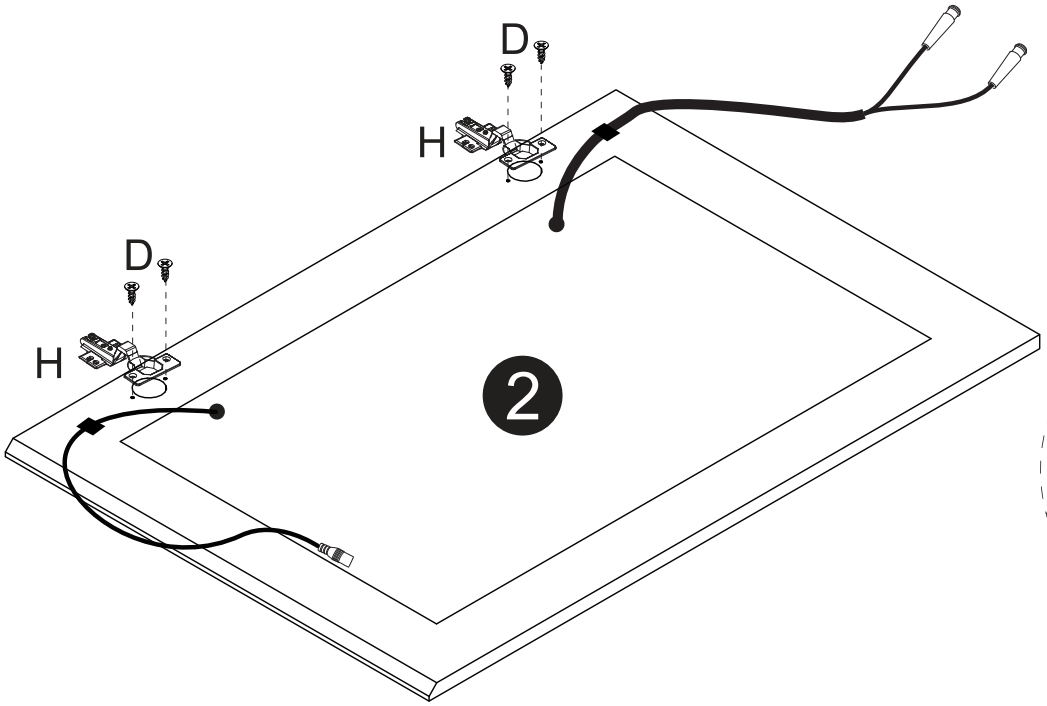







13



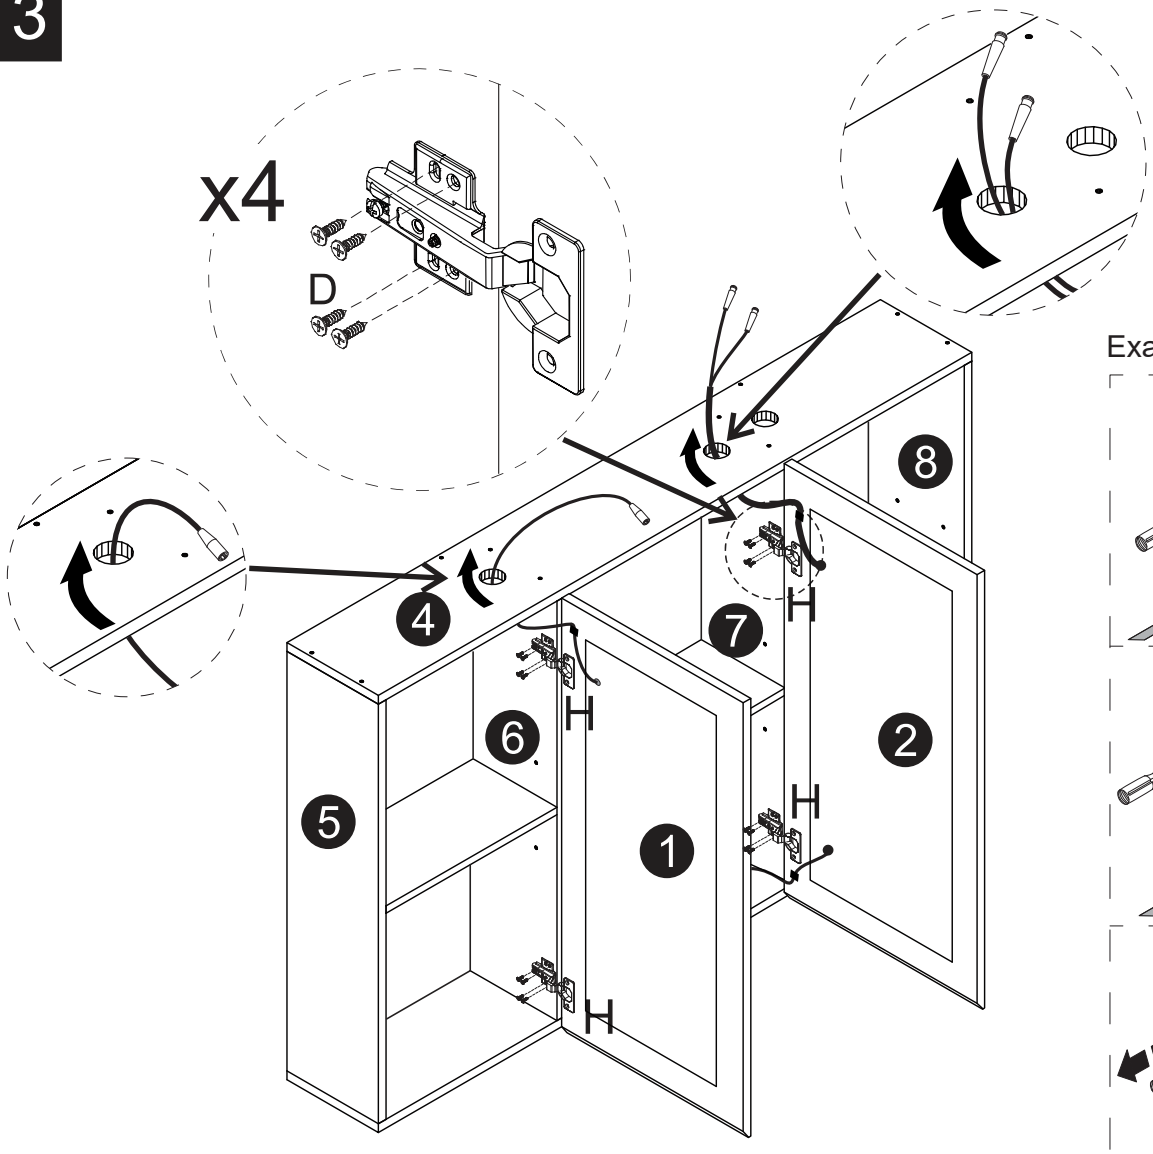


Example

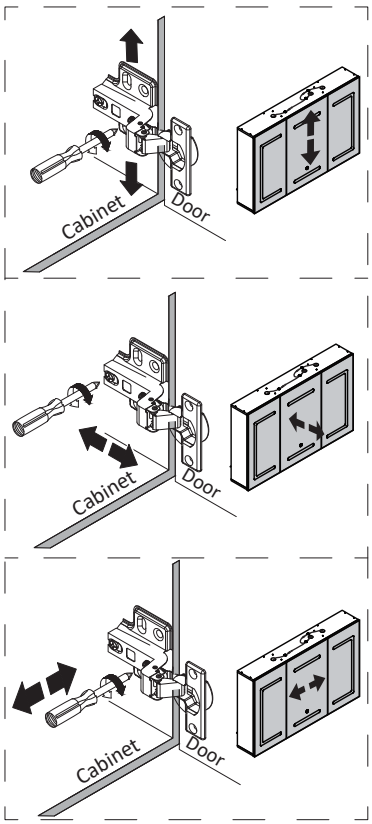


14


D	x 8

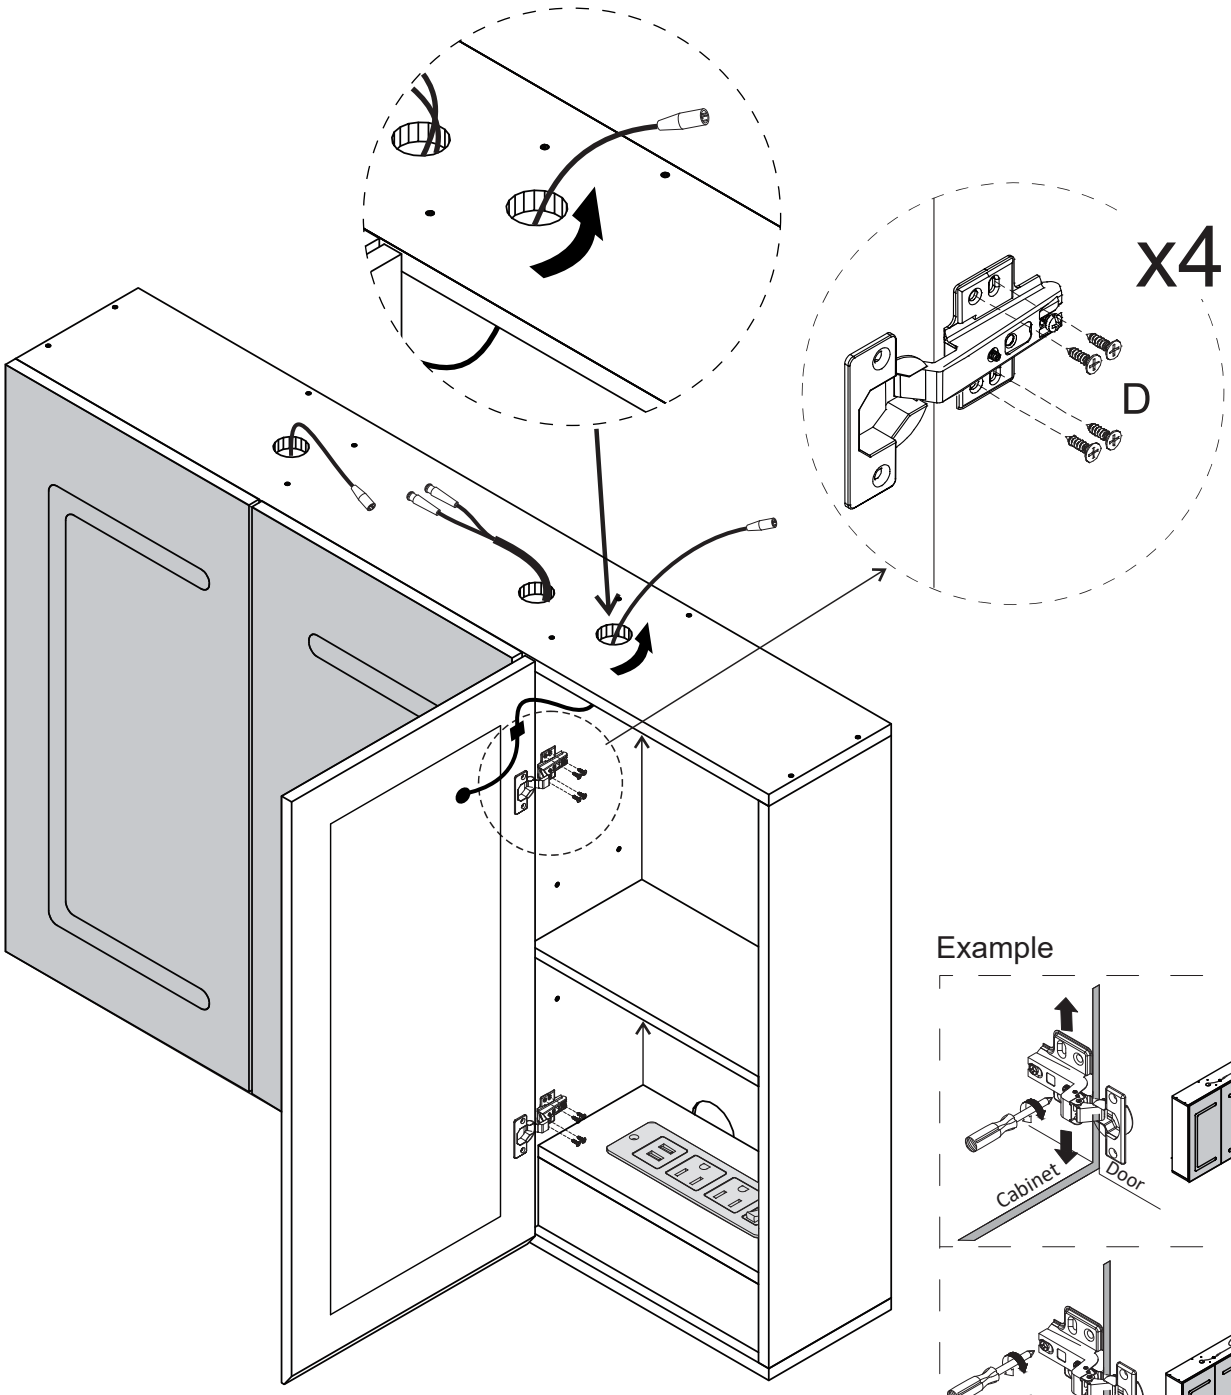


Example

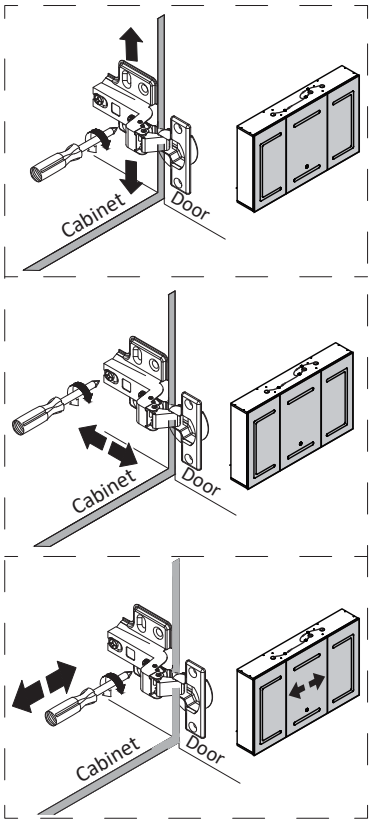


15

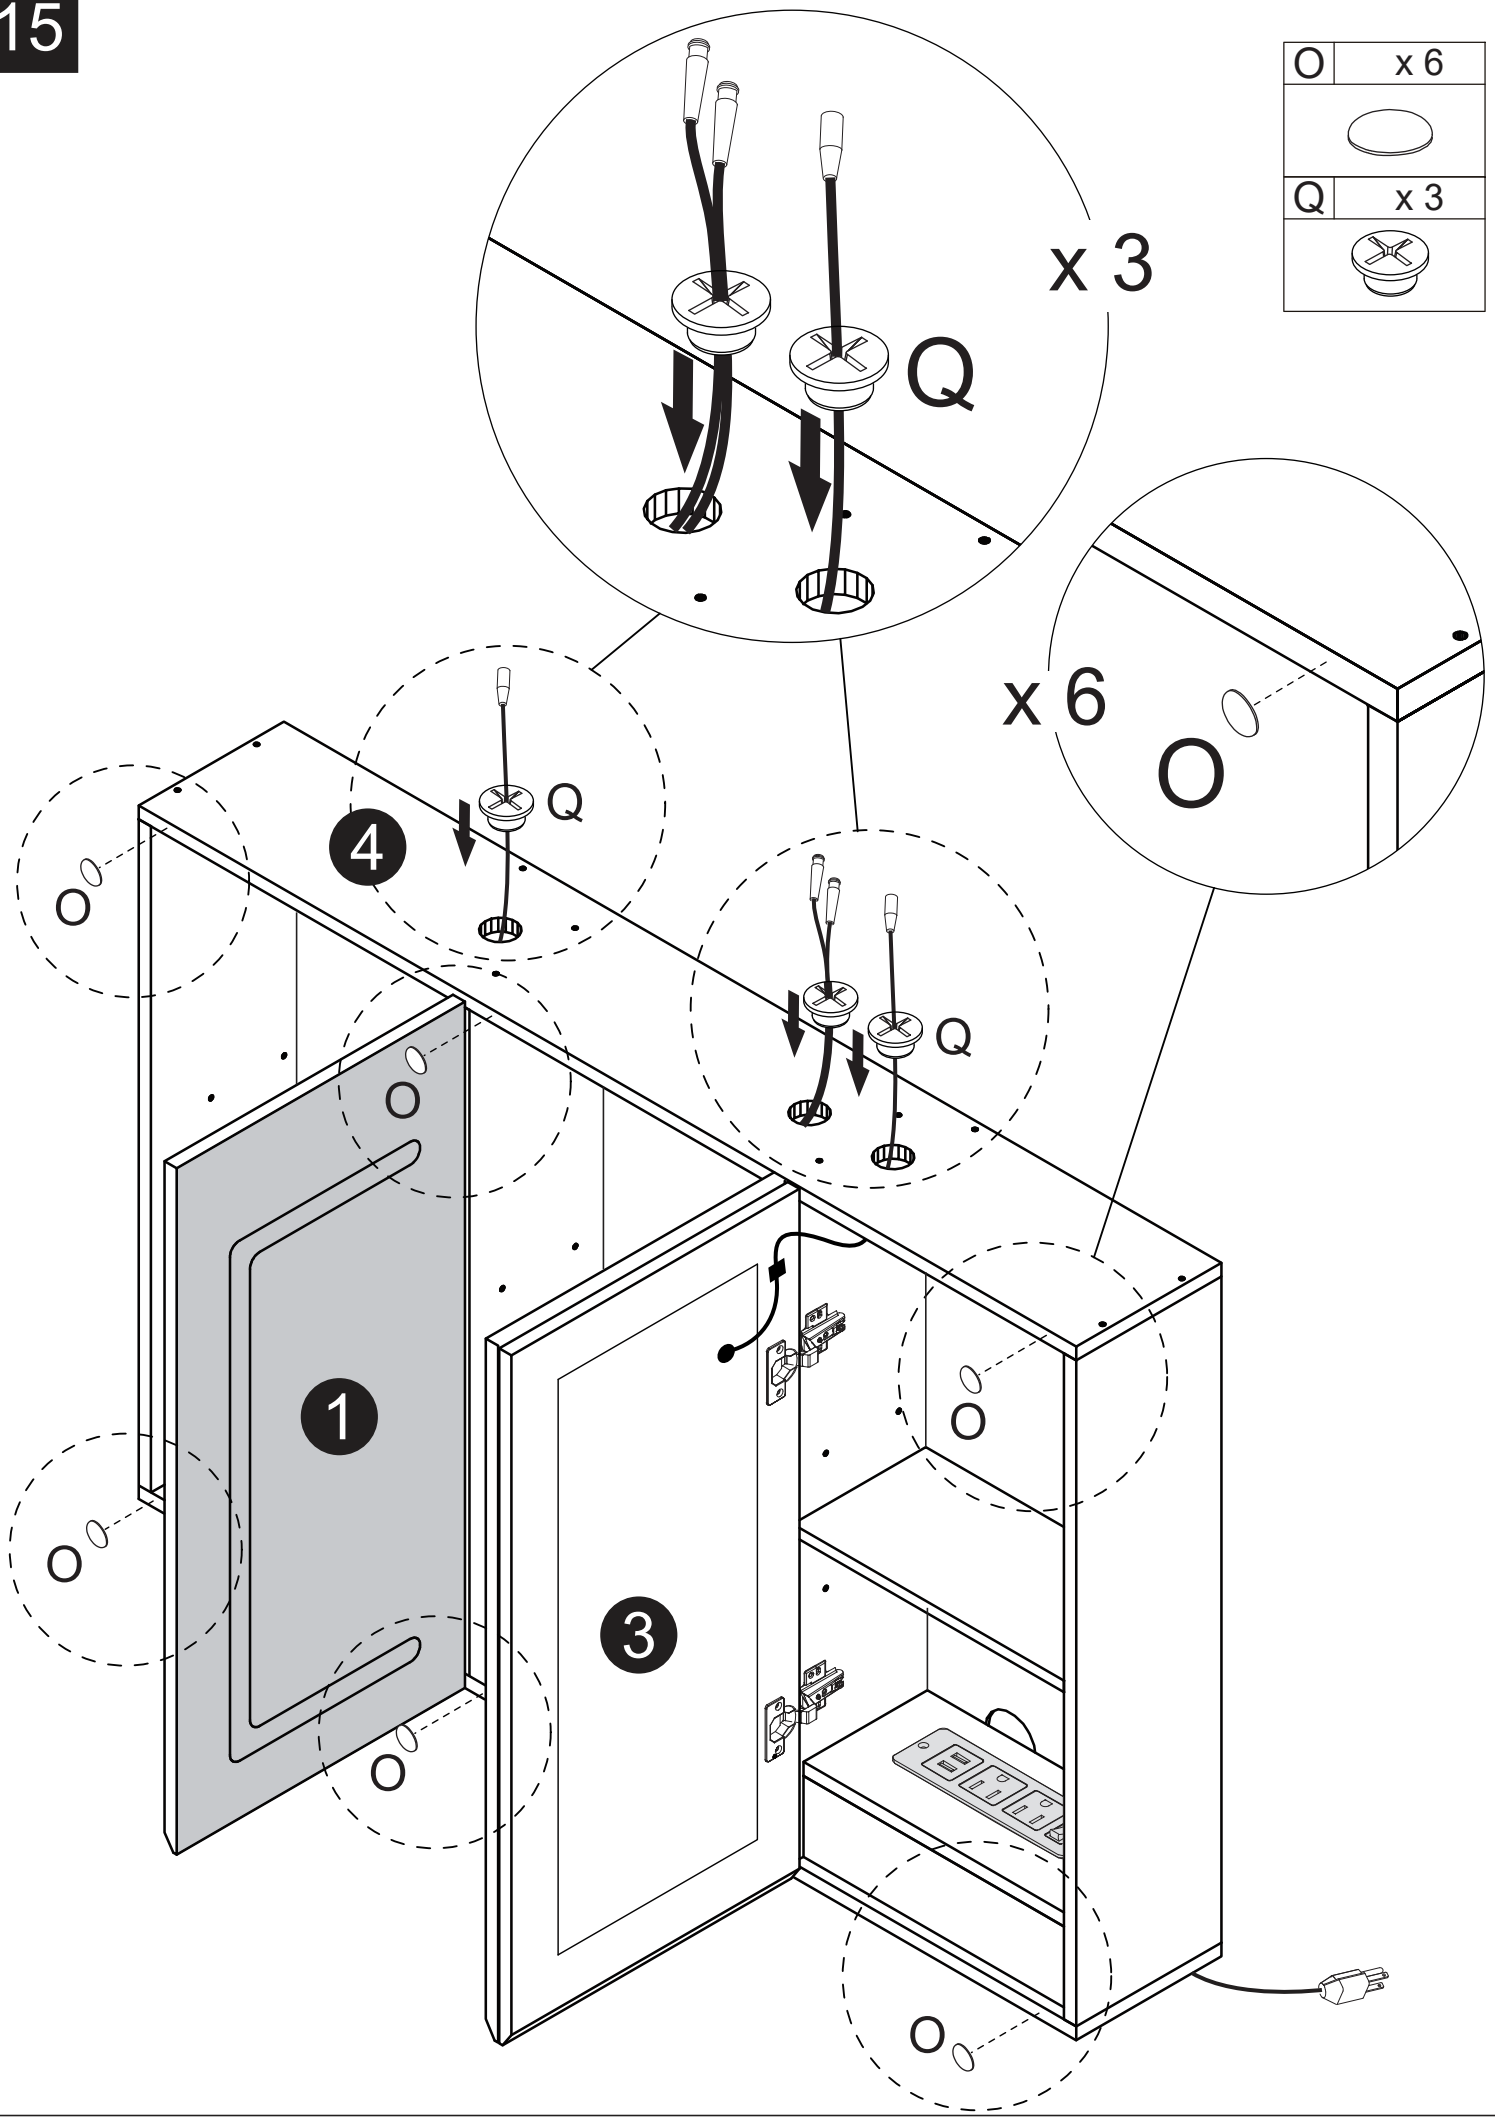


16



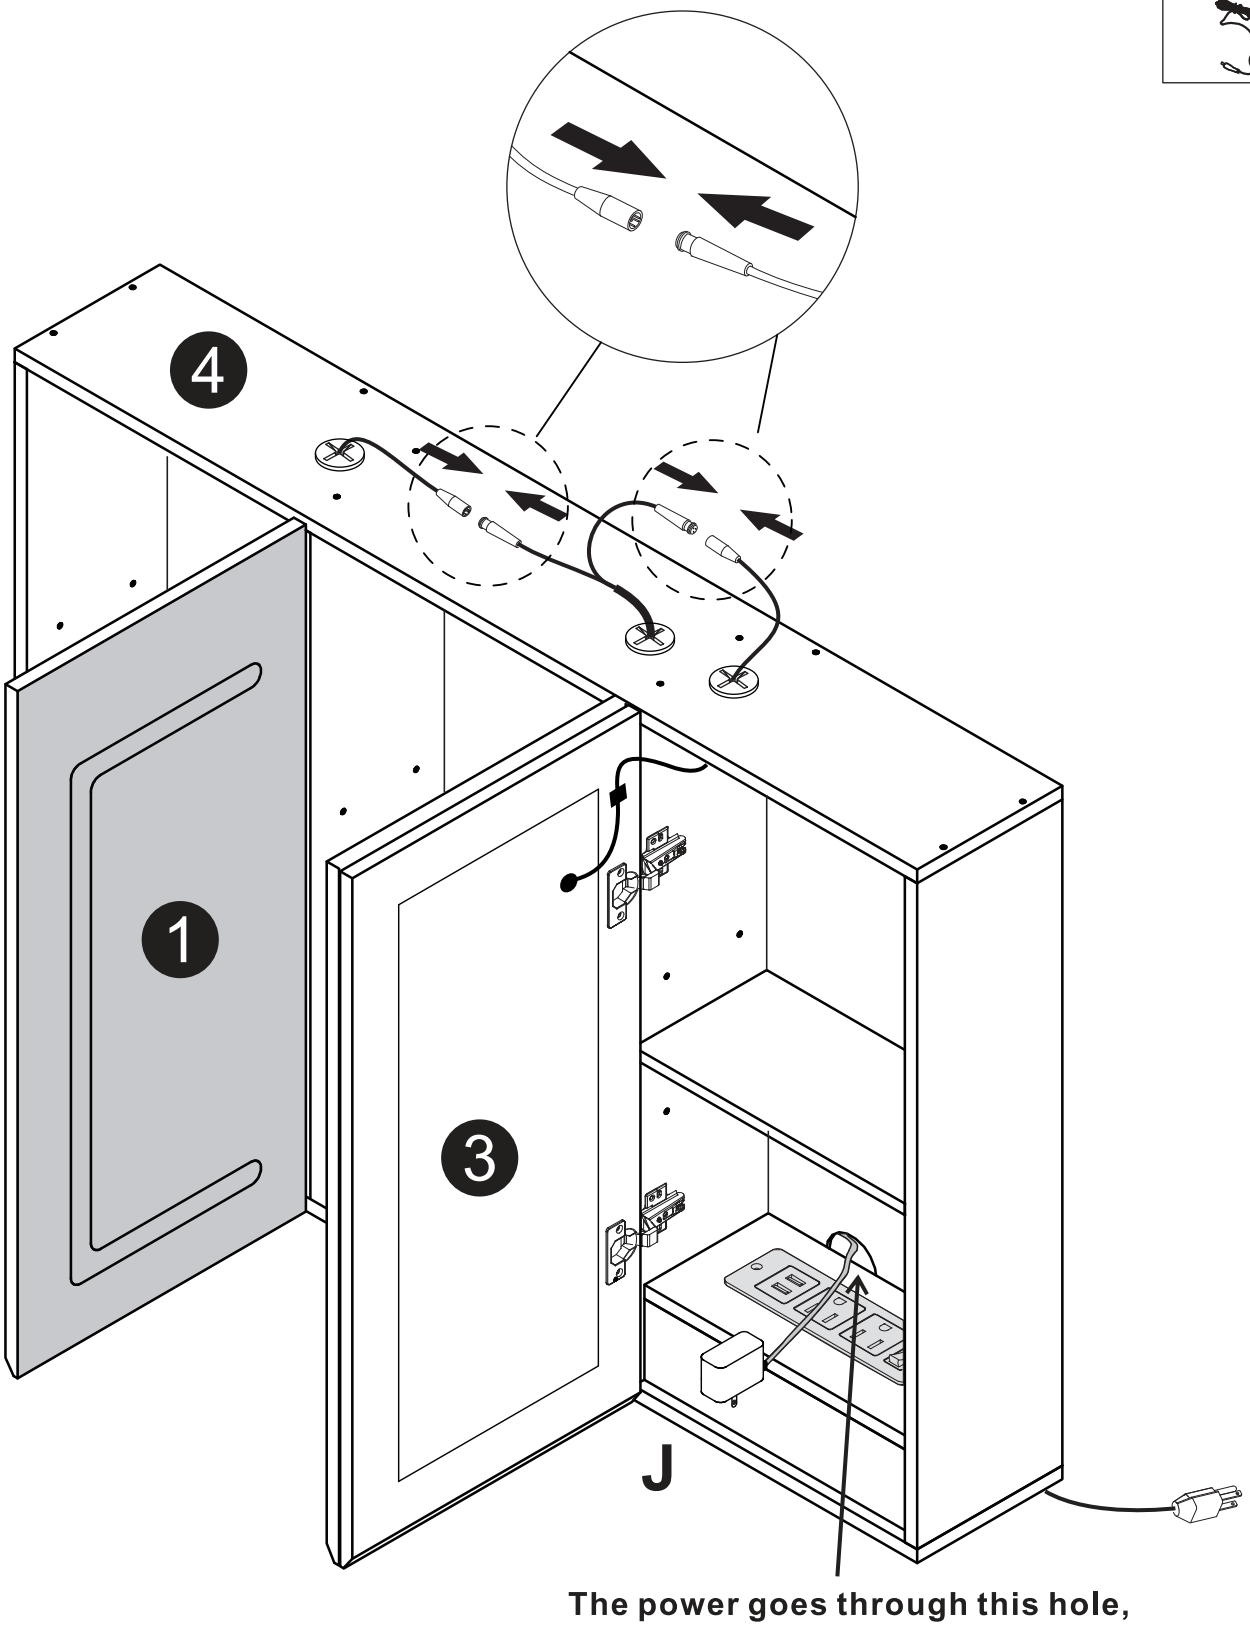


17

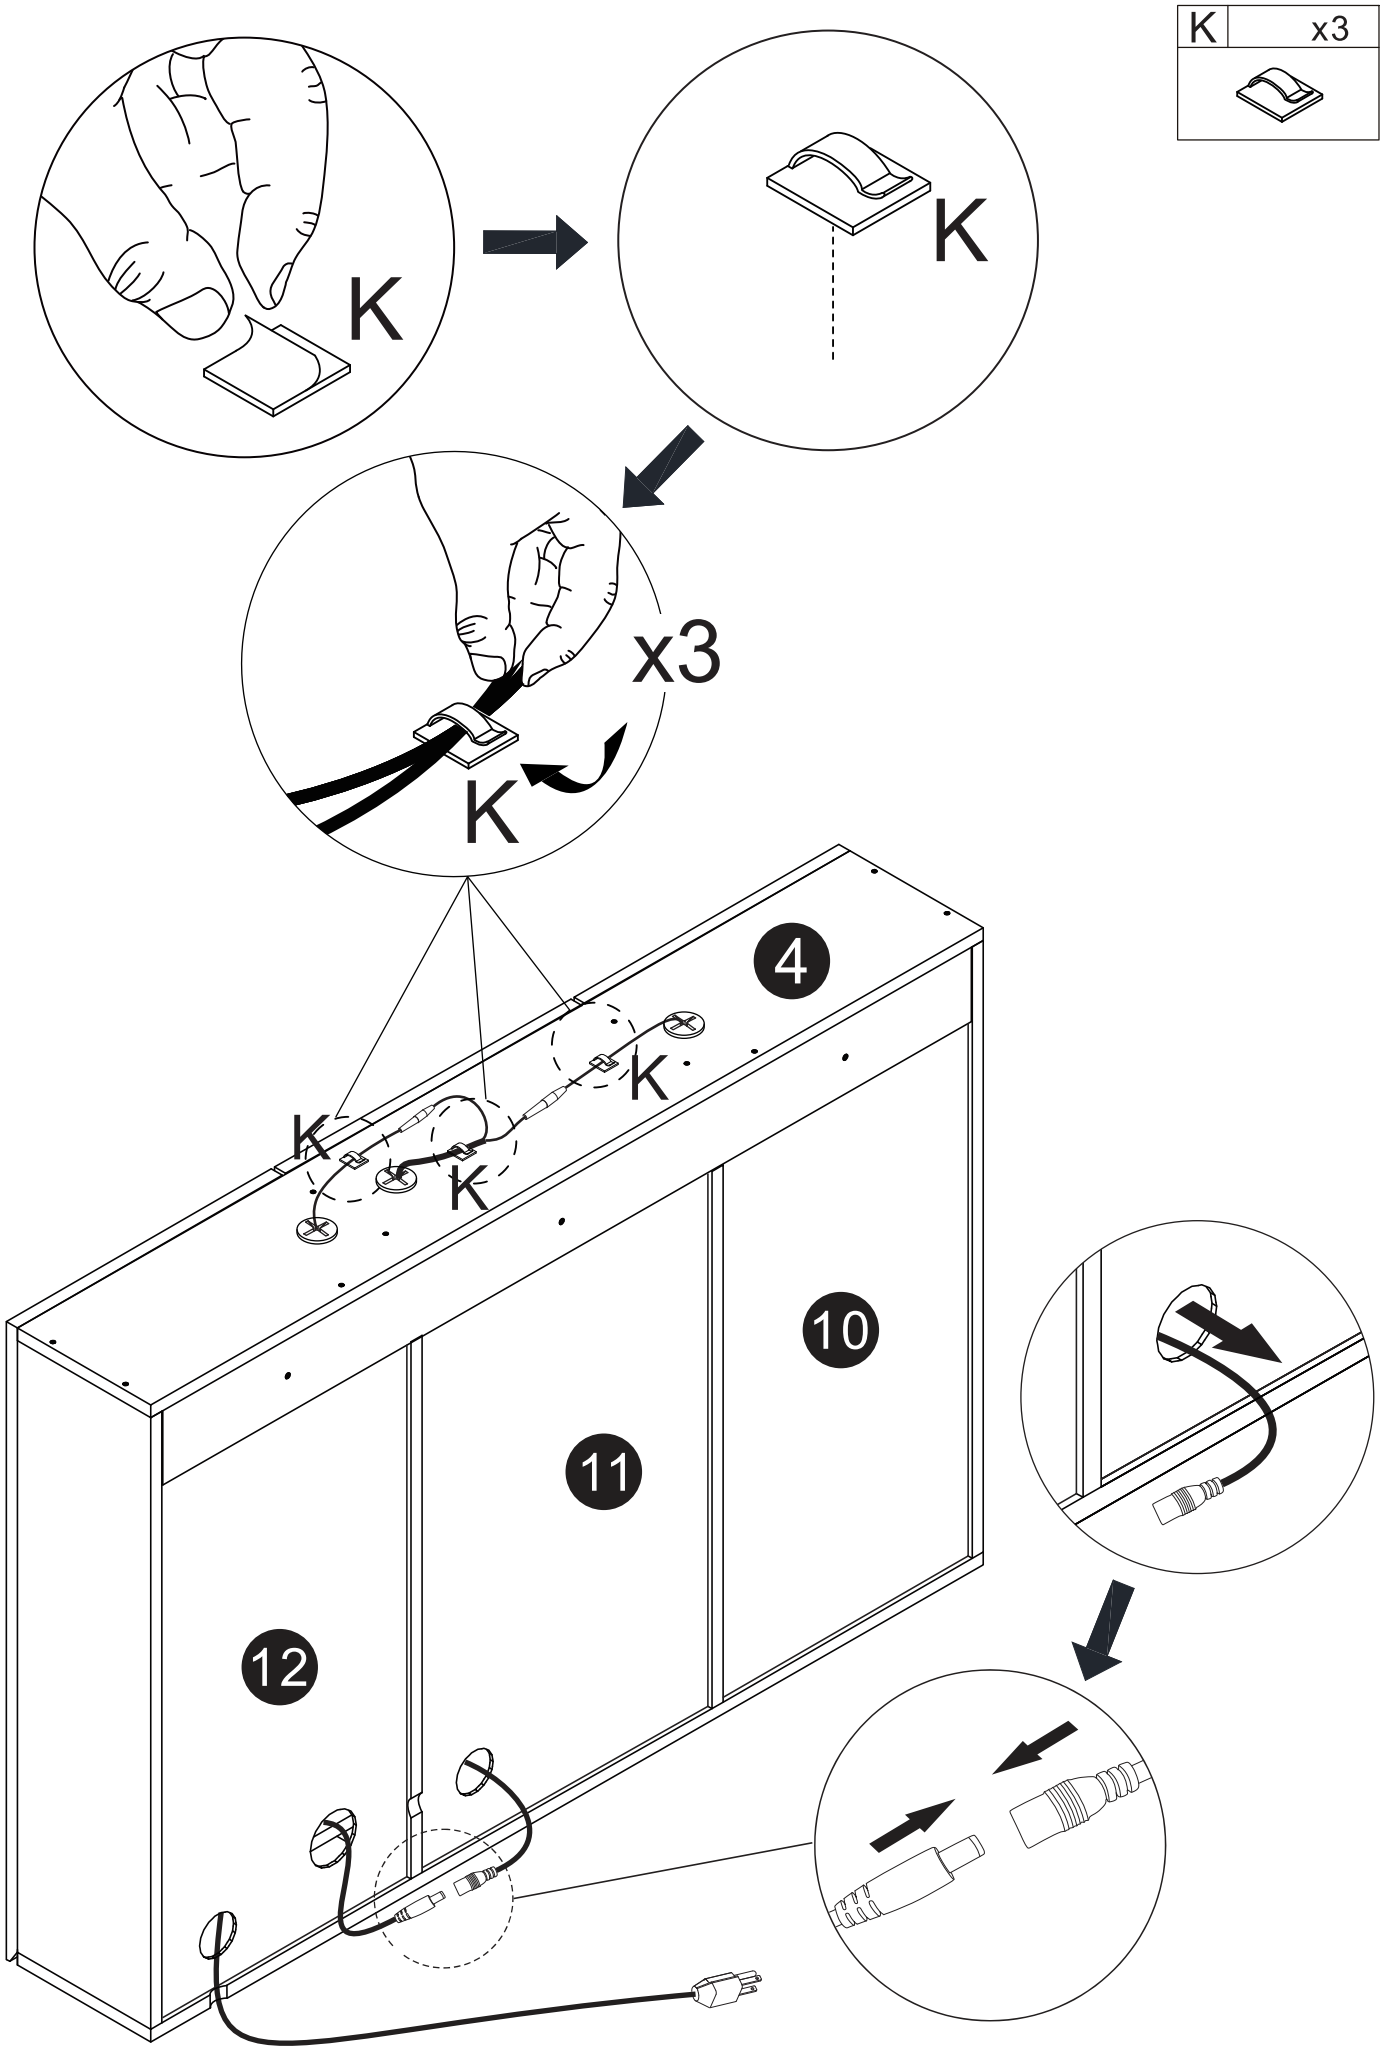


18

M	x 24
P	x 12

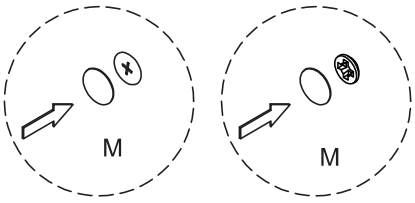


In order to make the product more beautiful,
please pastehardware M on the exposed holes

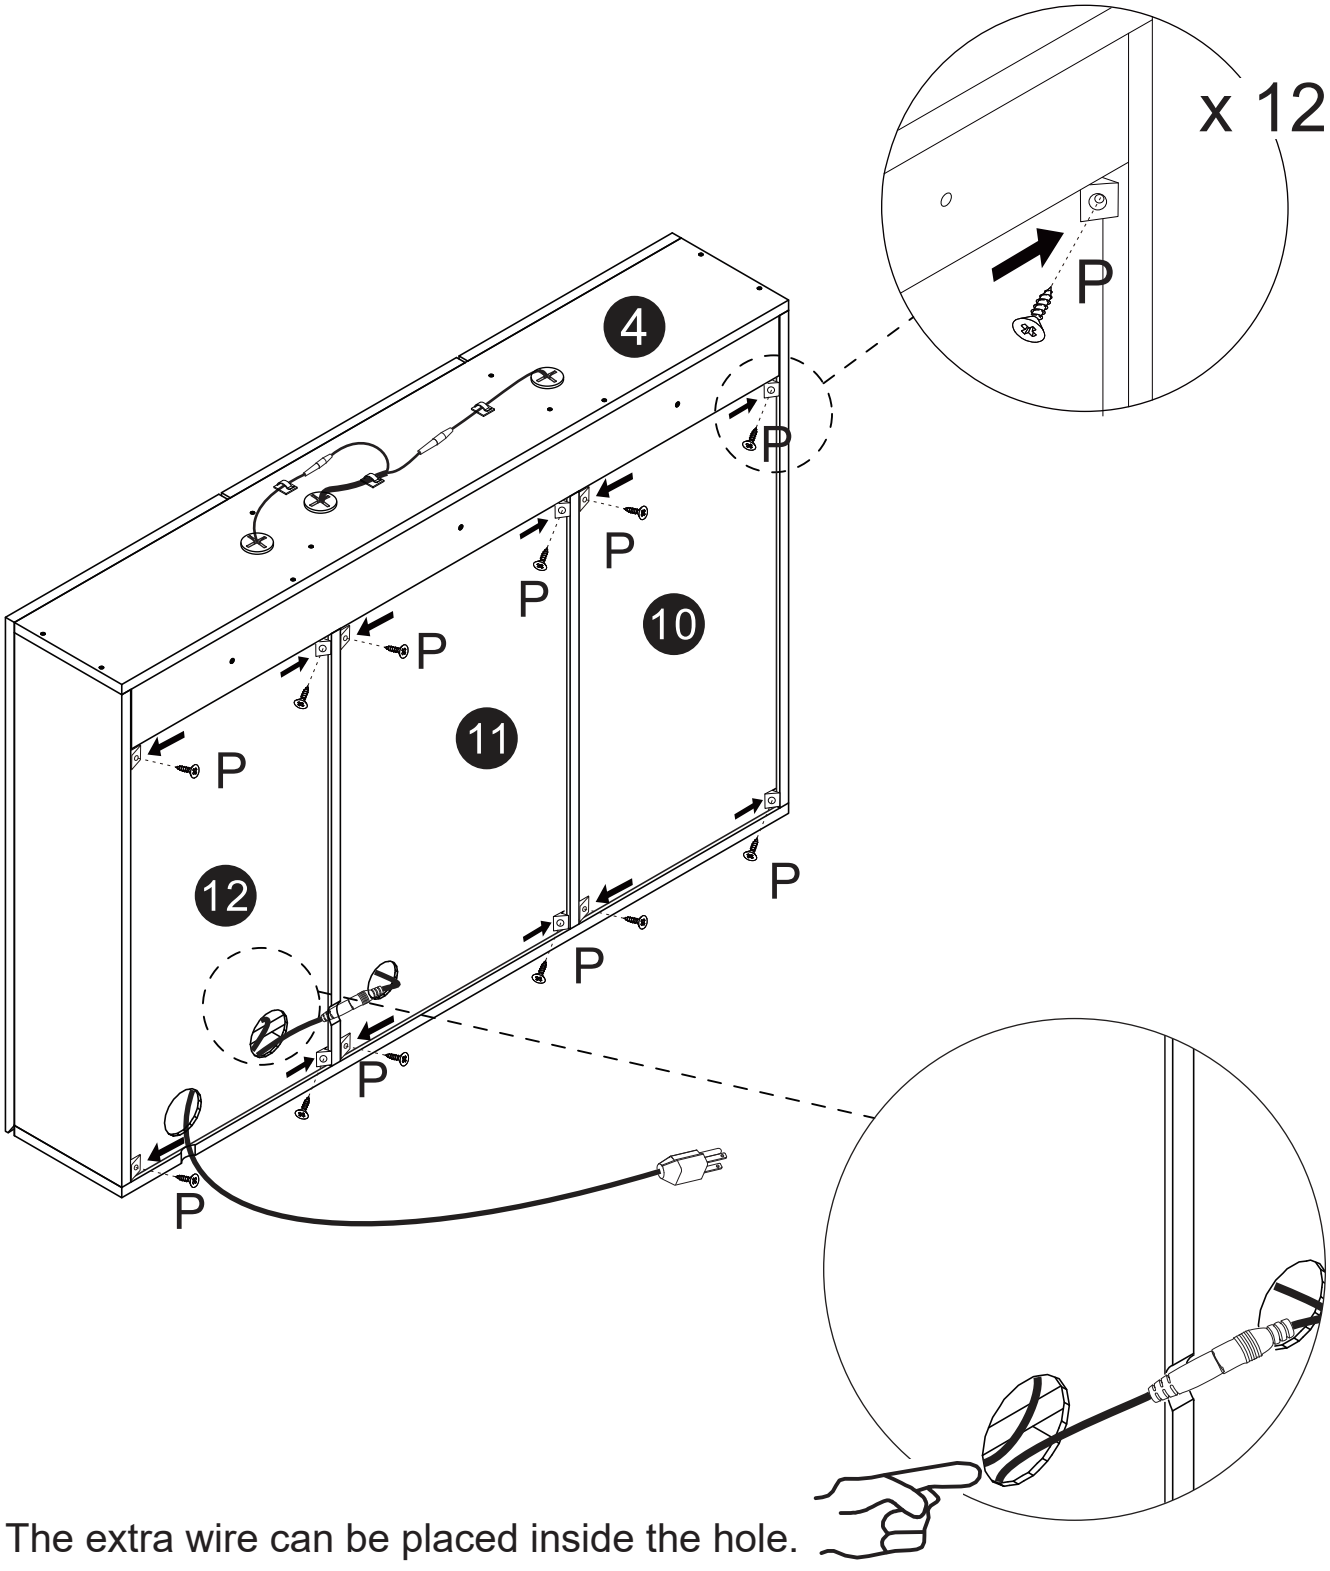


The extra wire can be placed inside the hole.

19

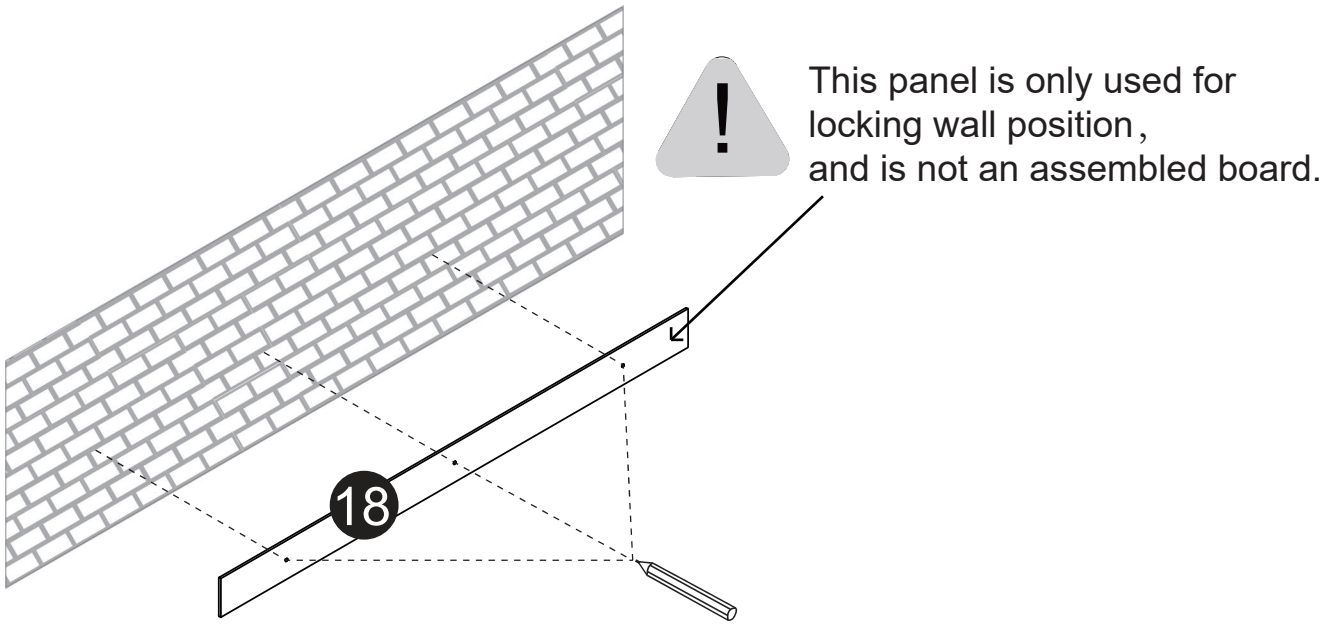

pencil the position of the hole


In order to ensure the horizontal position of the product during installation,
use board No.18 to mark the position that needs to be installed

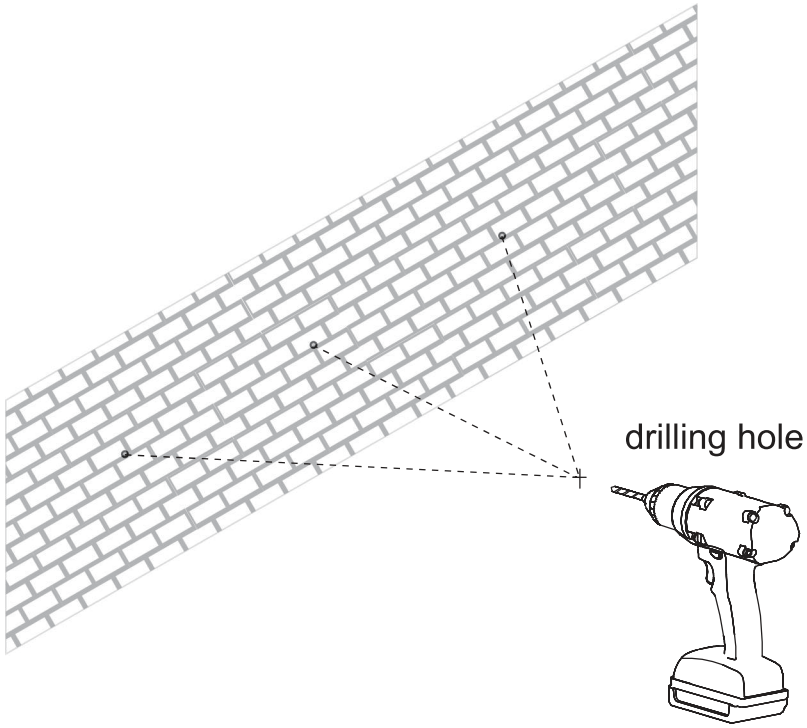

20

Use hardware L to install the cabinet into the drilled holes.

L	x 3

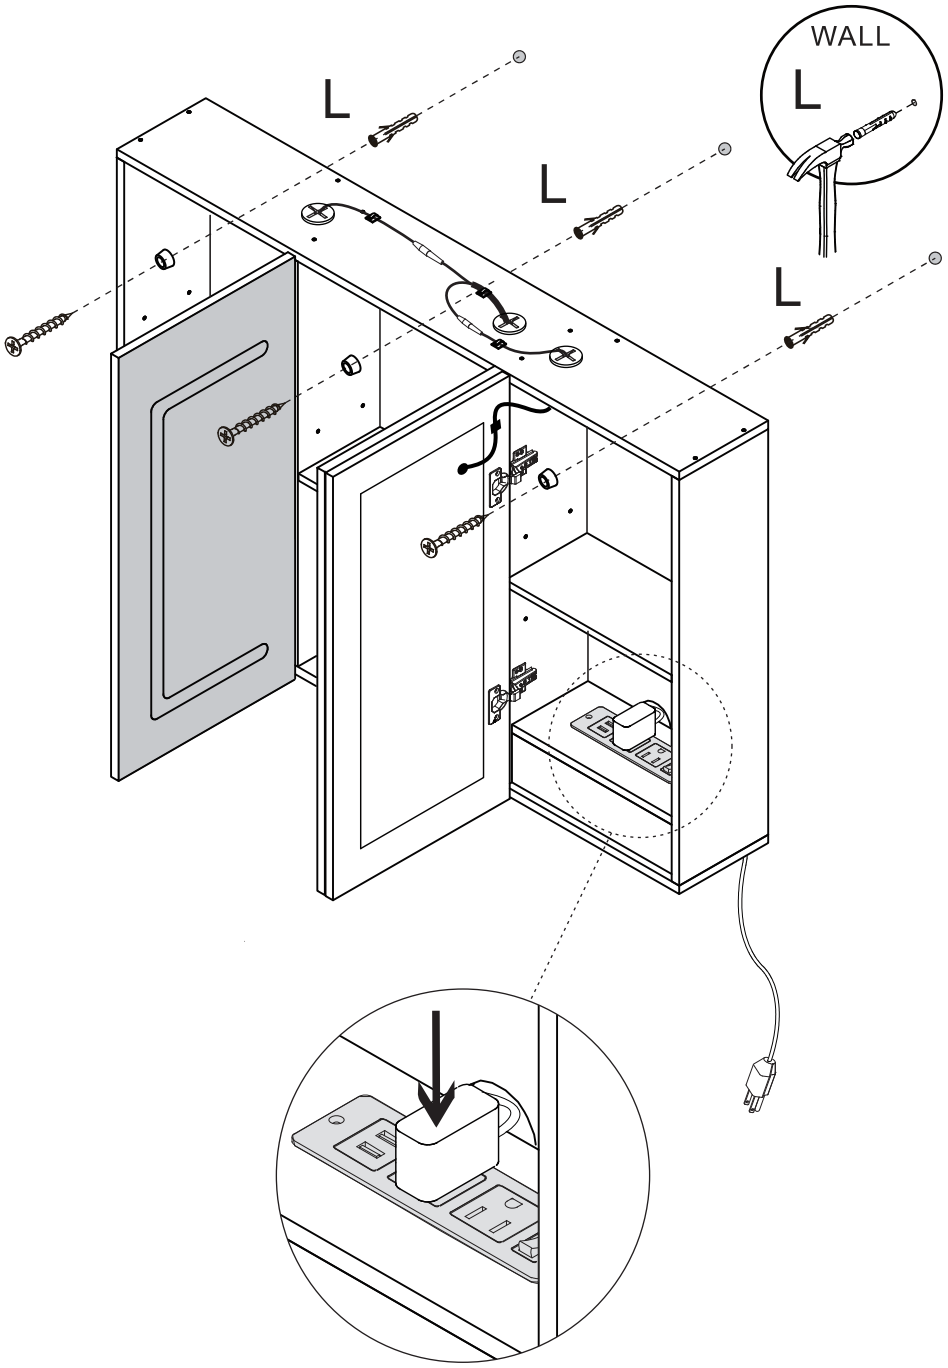

FUNTION:
The switch ⏻ control the light ON/OFF;
Dimmer: Keep pressing the ⏻ switch for over 2 seconds to adjust the brightness from 10% to 100% ;
CCT:Short press the ⏻ switch, the lighting color temperature can be adjust to either 3000K / 4500K /6400K

