
InvisiLED® Pro 3

24V High Output Foldable LED Tape Light

WAC LIGHTING

Responsible Lighting®

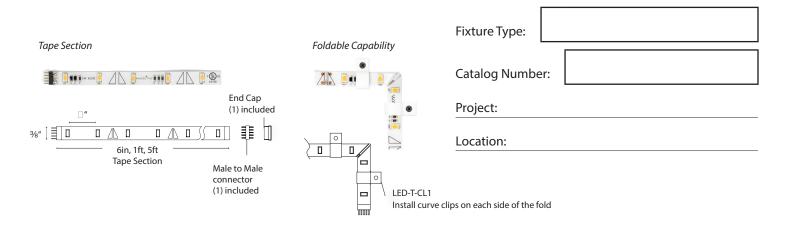

PRODUCT DESCRIPTION

Professional grade white tape light that delivers optimal color consistency and brightness. An ideal system for task or accent lighting applications.

FEATURES

- · Foldable design for lateral pattern creation
- · Install LED-T-CL1 clips with folds
- Ultra thin profile at 1/8". 90° fold height of 3/8"
- · Diodes spaced evenly at 1" on center
- Minimum run length of 1'
- · May be field cut every 6" at the end of a run
- 70,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Flexible, silicone cased tape light. Peel and stick 3M construction adhesive on back. Indicating marks on back for field cutting.

Power Supply: Remote and plug-in electronic Class 2 transformers. 120VAC & 277VAC 50/60Hz input, 24V 60W and 96W output.

Light Source: 12 LEDs per foot. Runs on 24V at 5W per foot.

Dimming: May be dimmed with electronic low voltage (ELV) dimmer.

Operating Temperature: $-4^{\circ}F - 104^{\circ}F$ ($-20^{\circ}C - 40^{\circ}C$), relative humidity 95%.

Standards: UL & CUL Listed for damp locations.

ORDER NUMBER - TAPE SECTIONS

Model #	Watts/ft	Color Temp	CRI Lumens/ft	Length	Qty	Tape Color
LED-TE24	5	27 2700K 30 3000K 35 3500K 45 4500K	95 385 95 395 90 440 90 475	6IN 6 inches 1 1 foot 5 5 feet 1-40 1 foot	1 1 1 40	WT White

LED-TE24___-_-W1
Example: LED-TE2445-6IN-WT

Class 2 Power Supply (Required)

Type		Model	Input	Output	Max Run	Dim	
Remote	Supplier of the control of the contr	EN-2460-RB2-T EN-24100-RB2-T	120VAC 120VAC	24VAC/60W 24VAC/96W	12 feet 20 feet	ELV ELV	Includes a 6 foot lead wire
Plug-in		EN-2460-P-AR-T EN-24100-P-AR-T	120VAC 120VAC	24VAC/60W 24VAC/96W	12 feet 20 feet	ELV ELV	Includes a 6 foot lead wire
Remote 277V		EN-24100-277-RB2-T	277VAC	24VDC/96W	20 feet	0-10V	Includes a 6 foot lead wire

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

InvisiLED® Pro 3

WAC LIGHTING

Responsible Lighting®

24V High Output Foldable LED Tape Light

Indoor Controller



Touch Panel and Motion Sensor

Includes a Touch Panel, an Occupancy Sensor, and a Controller CT-6A-R2 AC/DC input at 12V(60W Max) or 24V(96W Max) Connect on secondary side of driver/transformer

Pro, Pro2, Pro3, LITE, Classic Daylight to Sunset, Palette

Indoor Electrical Accessories

	In Wall Rated Extension Cable	LED-TC-WEXT-144 LED-TC-WEXT-144-WT	Black White	12 ft 12 ft
	Extends distance between a hard wired power supply or a wiring box to a tape section.	LED-TC-WEXT-240 LED-TC-WEXT-240-WT	Black White	20 ft 20 ft
	In Wall Rated Joiner Cable	LED-TC-WIC-144	Black	12 ft
	Constitution of the State of th	LED-TC-WIC-144-WT LED-TC-WIC-240	White Black	12 ft 20 ft
***	Connects tape sections. 2 female ends. 1 male to male connector included	LED-TC-WIC-240-WT	White	20 ft
		LED-TC-P-2	Black	2 ft
The state of the s	Lead Wire	LED-TC-P-2-WT	White	2 ft
		LED-TC-P-12	Black	12 ft
II.	Alternative lengths for plug-in power supplies	LED-TC-P-12-WT	White	12 ft
	Extension Cable	LED-TC-EXT-144 Black		
	Extends distance between a hard wired power supply or a wiring box to a tape section	LED-TC-EXT-144-WT	White	12 ft
	Low Voltage Wiring Box With Feed	LED-TC-B-2 Black		L: 1½ in
	Neatly houses connectos for up to	LED-TC-B-2 LED-TC-B-2-WT	White	W: 3/4 in
	two wires with 12" female feed	LLD IC D 2 WI	vviiite	H: 7/8 in
	Low Voltage Wiring Box			L: 1½ in
0 0 0		LED-T-B		W: ¾ in
	Neatly houses connections for up to two wires			H: 7/8 in
	Wiring Box With Switch			L: 6¼ in
	Use when spanning a large gap in a system layout without leaving	TB-S		W:15/8 in
	exposed wiring. Optional switch included			H: 1¼ in

Compatible with Pro, Pro2, Pro3, LITE, Classic

	Connects tape sections	LED-TC-IC36 LED-TC-IC36-WT	Black White	36 in 36 in
		LED-TC-IC36	Black	36 in
		LED-TC-IC12-WT	White	12 in
	Joiner Cable			
		LED-TC-IC12	Black	12 in
		LED-TC-IC6-WT	White	6in
		LED-TC-IC6	Black	6 in
		LED-TC-IC2 LED-TC-IC2-WT	Black White	2 in 2 in

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette. Change directionality of tape runs and reuse cut ends of tape.

	3-Way "Y" Connector	LED-TC-Y LED-TC-Y-WT	Black White	
0	Connects tape sections			
Y	4-Way "X" Connector	LED-TC-X	Black	
	Connects tape sections	LED-TC-X-WT	White	
	"L" Connector	LED-TC-L	Black	
	Connects tape sections	LED-TC-L-WT	White	
	End cap	LED-TC-EC	Black	
	1 cut and 1 male end cap	LED-TC-EC-WT	White	


Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

InvisiLED® Pro 3

Indoor Aluminum Channels

WAC LIGHTING

Responsible Lighting®



Diffuses light from InvisiLED tape Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette See pages 1-6,191-194 for recessed channels



Deep Aluminum Channel Additional End Cap

LED-T-CH1 LED-T-CH1-EC 5 feet 2 pcs

Eliminates visible hot spots Includes a diffuser, two end caps, and five screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette See pages 1-6,191-194 for recessed channels



Includes a diffuser, two end caps, and ten screws Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette See pages 1-6,191-194 for recessed channels



Fixed Angle LED-T-CL3-PT Channel Clip



Adjustable Channel Clip

LED-T-CL2-PT

Includes 2 pieces, 4 screws. Use to mount Aluminum Channel, Deep Aluminum Channel, 45° Angled Aluminum Channel

INDOOR MOUNTING ACCESSORIES



Aluminum Retrofit Channel

LED-T-RC 3 feet

Clear Channel

LED-TO24-CH5

5 feet

Can be bent to create fixed curves or used as a glare shield

Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette

Includes a diffuser, two end caps, and five screws Provides a clean mounting surface for 3M adhesive



Clip For surfaces that are difficult to adhere

LED-T-CL

10 pcs 10 Screws



Curve Clip Secures on one edge

LED-T-CL1

10 pcs 10 Screws

Clips to hold indoor InvisiLED tapes sections Compatible with Pro, Pro2, Pro3, LITE, Classic, Palette