


1. Carefully remove all parts from box and remove all plastic covering from lamp parts.
2. Place the LAMP BODY(A) on table.
3. Screw Light tripod(B) onto LAMP BODY(A)
4. Screw the screw (C) to the central pipe (B) and (A), taking care not to screw the power cord, tighten it.
5. Place HARP(E) onto SADDLE(D).
6. Place SHADE(F) onto HARP(E) and tighten it with the FINIAL(G).

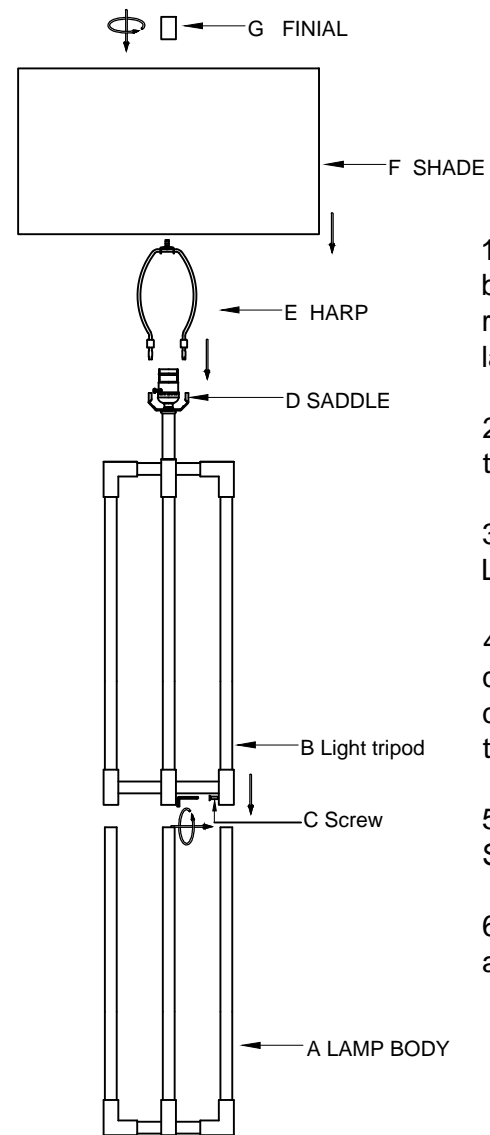

1. Carefully remove all parts from box and remove all plastic covering from lamp parts.
2. Place the LAMP BODY(A) on table.
3. Screw Light tripod(B) onto LAMP BODY(A)
4. Screw the screw (C) to the central pipe (B) and (A), taking care not to screw the power cord, tighten it.
5. Place HARP(E) onto SADDLE(D).
6. Place SHADE(F) onto HARP(E) and tighten it with the FINIAL(G).