



# Devonshire® | K-1184-W1

60" x 32" drop-in bath with Bask® heated surface and reversible drain

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- Integral lumbar support and armrests offer extra comfort while bathing
- Textured bottom surface
- Coordinates with other products in the Devonshire collection



DISCONTINUED



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 19:08 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
cUL Listed  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                              |
|------------------------|------------------------------|
| Drain Location:        | Reversible                   |
| Minimum Flat for Door: | 2-1/2" (64 mm)               |
| Basin Area, Bottom:    | 42" x 20" (1067 mm x 508 mm) |
| Basin Area, Top:       | 51" x 24" (1295 mm x 610 mm) |
| Water Depth:           | 14" (356 mm)                 |
| Water Capacity:        | 60 gal (227.1 L)             |
| Minimum Floor Load:    | 41 lbs/ft <sup>2</sup>       |
| Weight:                | 80 lbs (36.3 kg)             |

## Material

- Acrylic

## Recommended Products/Accessories

K-1177 Tiling-in bead, 144" length  
K-1491 Bath/whirlpool pillow, removable  
K-1601 Bath/whirlpool footstop, removable  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner  
K-7213 Cable bath drain with PVC tubing  
K-7214 Cable bath drain, less PVC tubing  
K-7259 Brass toe tap bath drain  
K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
K-706003-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass  
K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass

## Required Products/Accessories

- K-T37392 Rotary-turn bath drain trim
  - K-T37391 Rotary-turn bath drain trim
- or
- K-78438 30" cable bath drain
  - K-37383 Rough-in cable bath drain, PVC, 30" cable with tubing
- or
- K-78439 45" cable bath drain
  - K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube



---

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated surface: 120 V, 15 A

## Electrical Component Ratings

Heated surface: 120 V, 0.5 A, 60 Hz, 65 W


---

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Receptors Lifetime Limited  
Warranty|KOHLER® Hydrotherapy Components Five-Year  
Limited Warranty



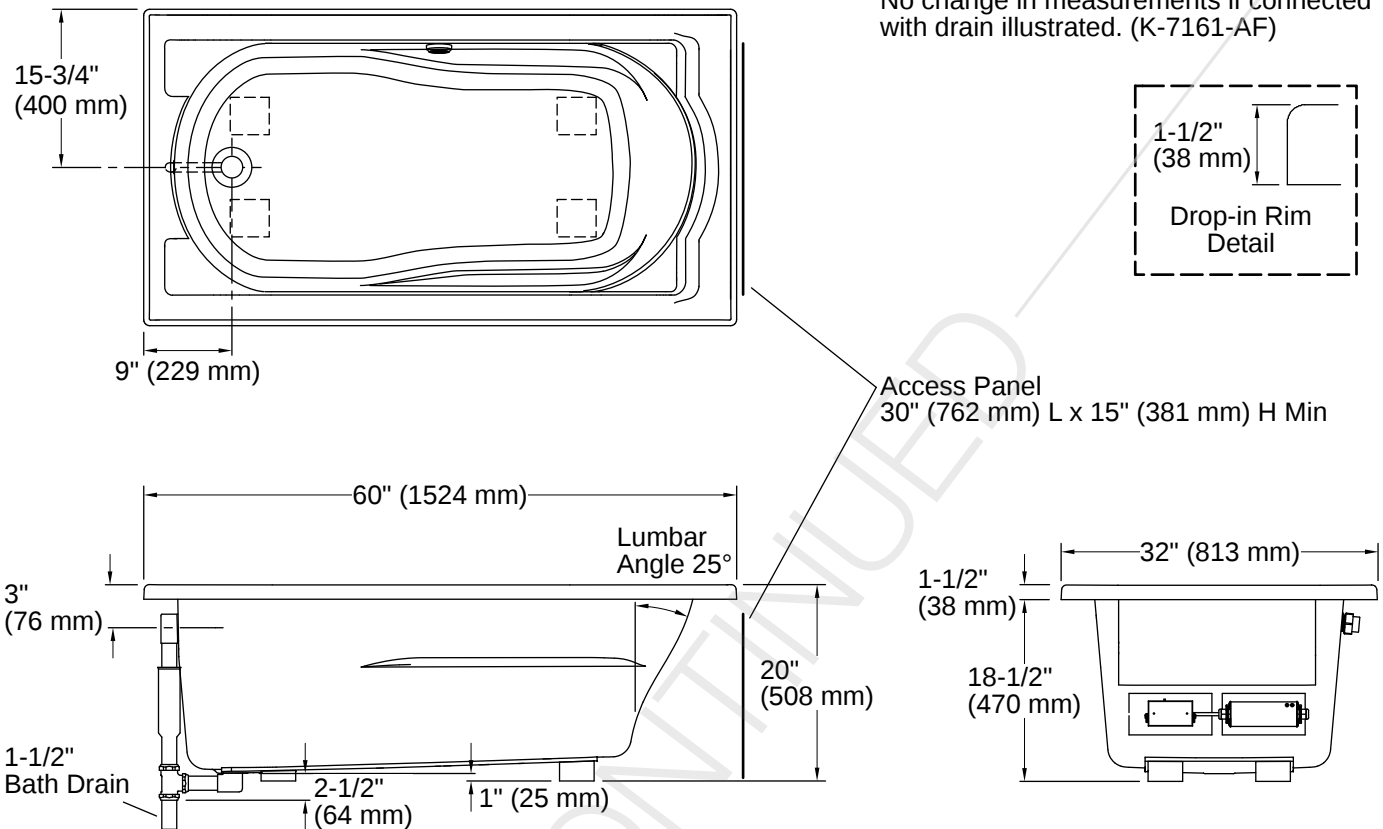

## Installation

- Reversible drain
- Drop-in

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-29-2026 19:08 - US-CA