

WAC LIGHTING

Interlok

Bath & Wall Light 4CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-77424 24"	2700K	BN Brushed Nickel	18 W	2542	1398
	3000K		18 W	2542	1398
	3500K		18 W	2542	1398
	4000K		18 W	2542	1398

Example: **WS-77424-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Smoothly opulent. Thick-walled shades offer beautifully diffuse illumination. The frame's elegant lines draw attention to its glass blocks, fashioning a statement of luxury for yourbath.

FEATURES

- Thick walled glass diffusers
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Extruded aluminum body with glass diffuser

REPLACEMENT PARTS

RPL-GLA-77424 - RPL Glass for WS-77424/36




FINISHES:



Brushed
Nickel

LINE DRAWING:

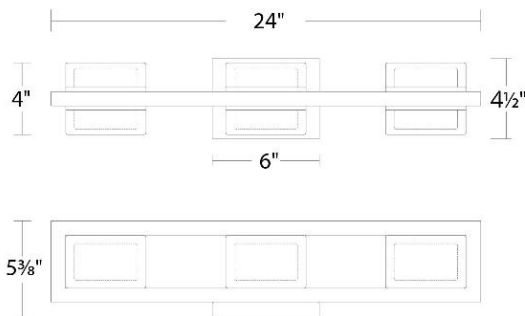

WS-77424

WAC LIGHTING

WAC LIGHTING

Interlok

Bath & Wall Light 4CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-77436 36"	2700K	BN Brushed Nickel	25 W	3438	1891
	3000K		25 W	3438	1891
	3500K		25 W	3438	1891
	4000K		25 W	3438	1891

Example: **WS-77436-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Smoothly opulent. Thick-walled shades offer beautifully diffuse illumination. The frame's elegant lines draw attention to its glass blocks, fashioning a statement of luxury for yourbath.

FEATURES

- Thick walled glass diffusers
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	3500K,3000K,4000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Extruded aluminum body with glass diffuser

REPLACEMENT PARTS

RPL-GLA-77424 - RPL Glass for WS-77424/36




FINISHES:



Brushed
Nickel

LINE DRAWING:

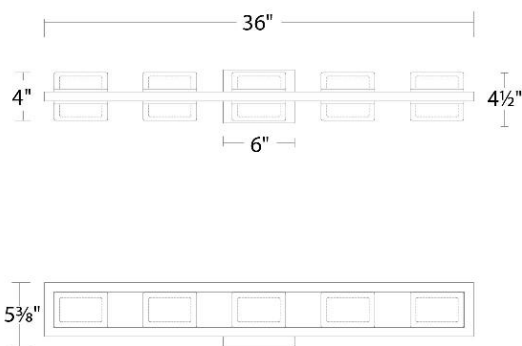

WS-77436

WAC LIGHTING