


84040A Product Installation Instructions

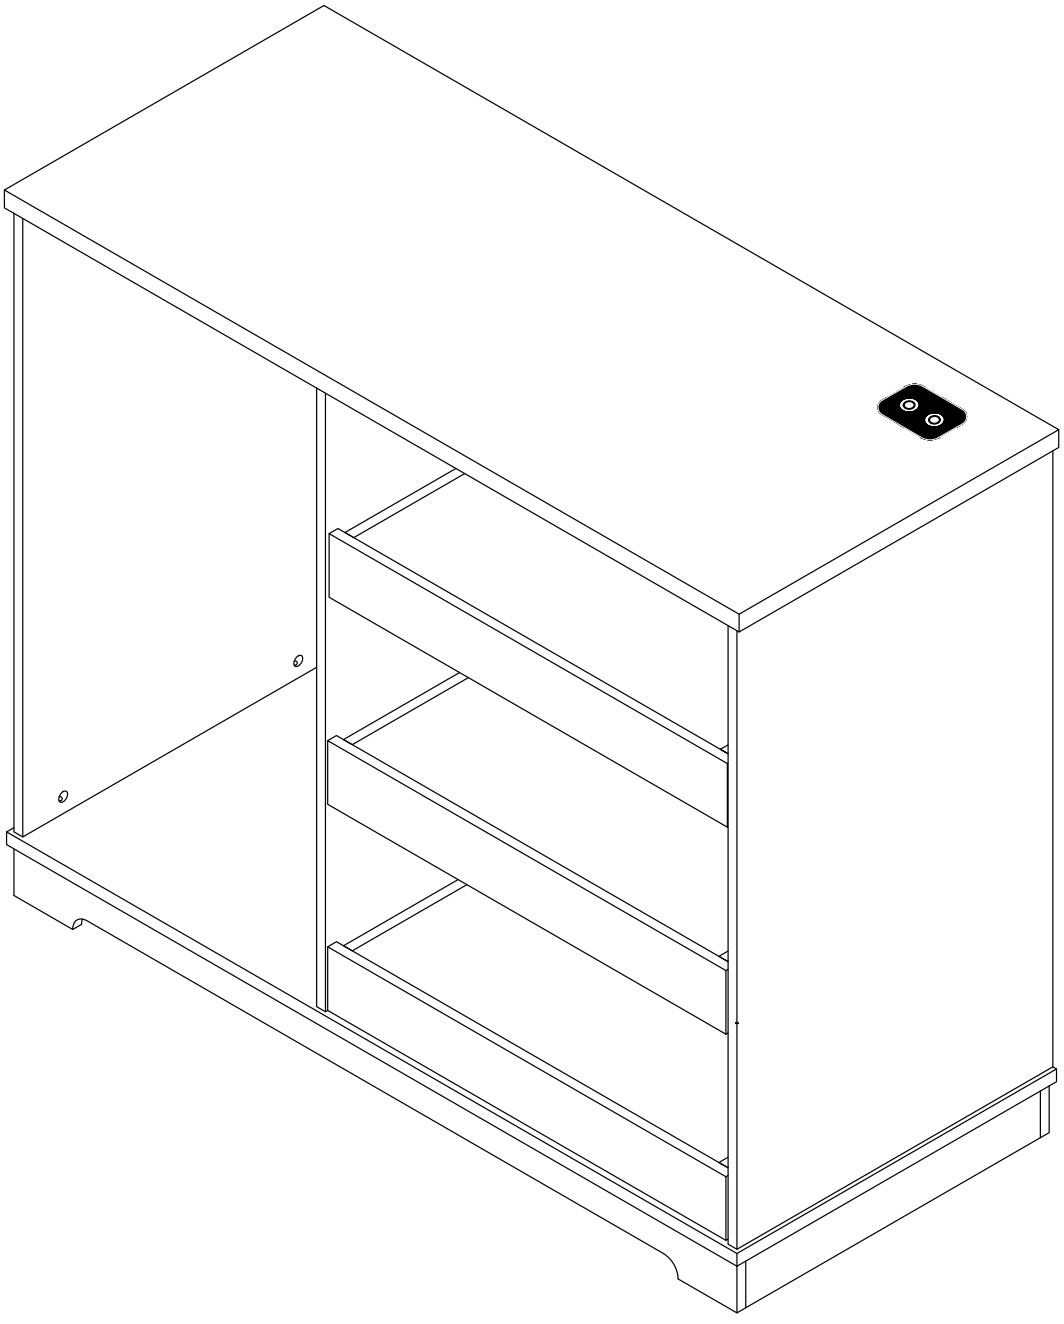





1 x3




2 x6




3 x3




4 x3




5 x1




6 x2




7 x1




8 x1




9 x1




10 x1




11 x1




12 x2




13 x1




14 x1




15 x1



16 x1










17 x1




18 x1

Accessories list

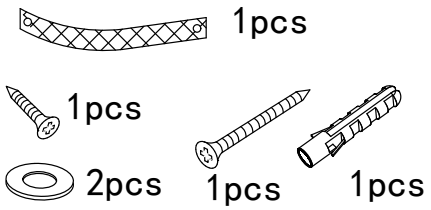A		Two In One Screw (6x28mm)	75pcs +7pcs
B		Two In One Nut (10x12mm)	75pcs +7pcs
C		Wood Chipping (6x30mm)	12pcs +2pcs
D		Guide rails & screws (3x12mm) 29cm	30pcs +6pcs 6pcs
E		Non-slip pads (50x2mm)	6pcs +1pcs
F		Fixing Clip & Screw (3x16mm)	12pcs +1pcs
G		anti-tipping tape Screw & gasket (3.5x12mm) Screw (4x45mm)	1pcs
H		Double end connecting line	1pcs
I		Wire clamp	4pcs +2pcs
		AC/DC Adapter (12V⎓2.0A)	1pcs




1pcs




Double-head screwdriver, use as required

Product structure decomposition

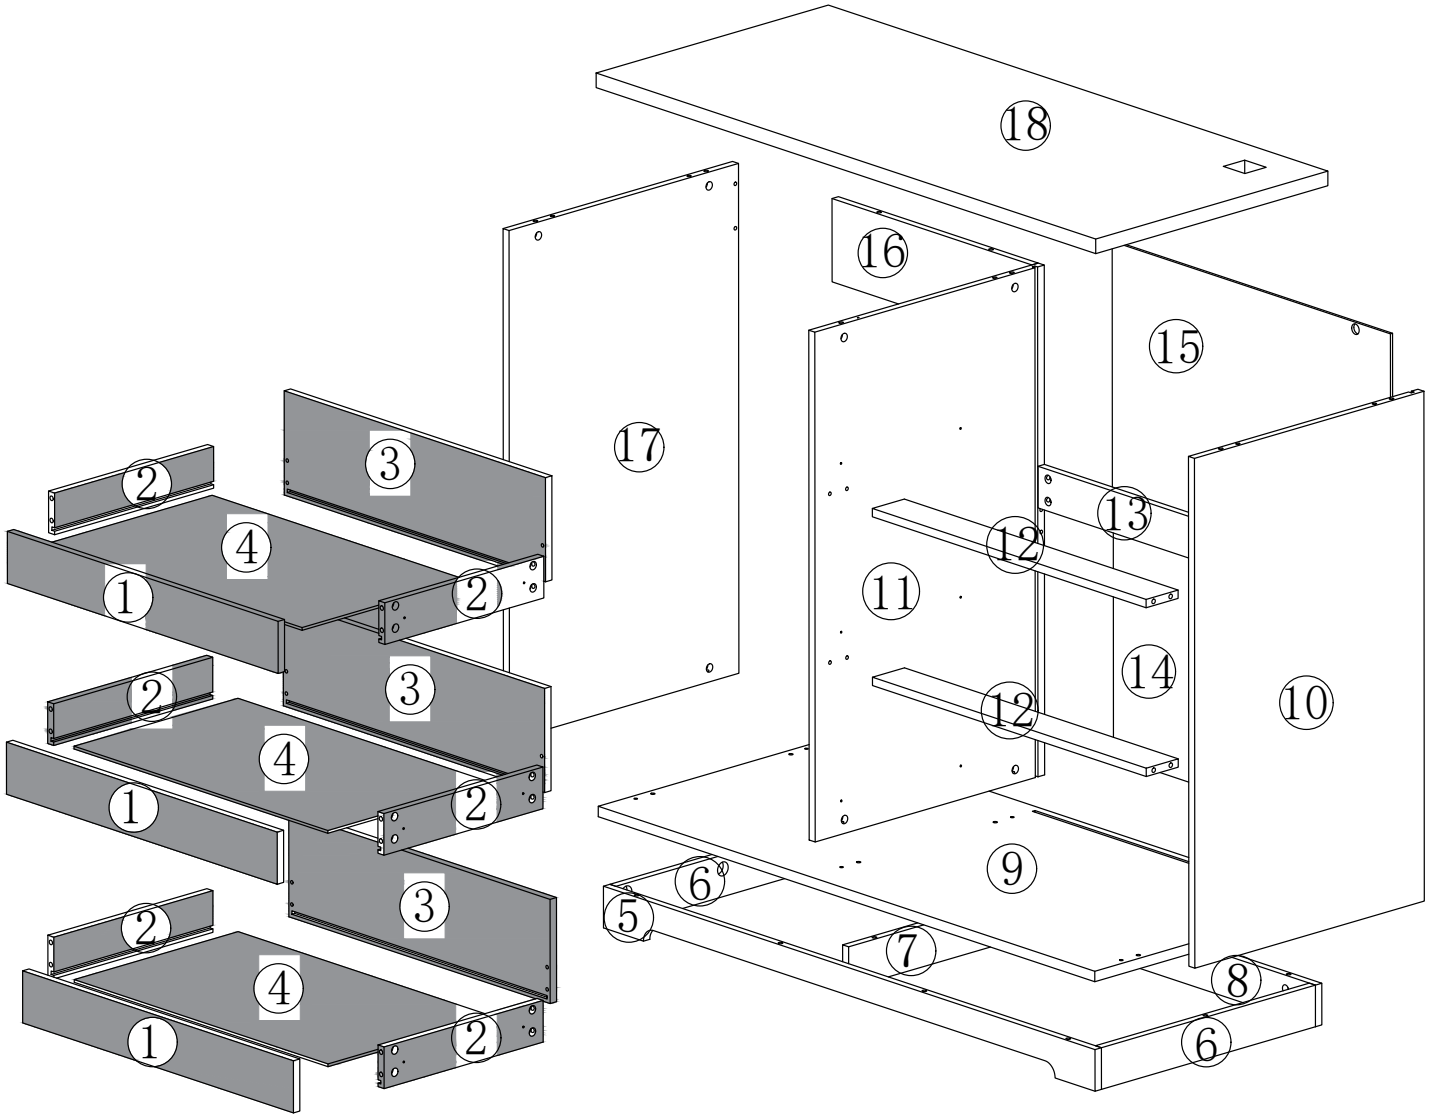


Use parts ① and ②


Step1

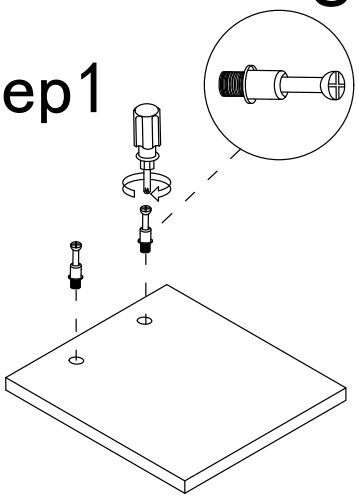


Step2

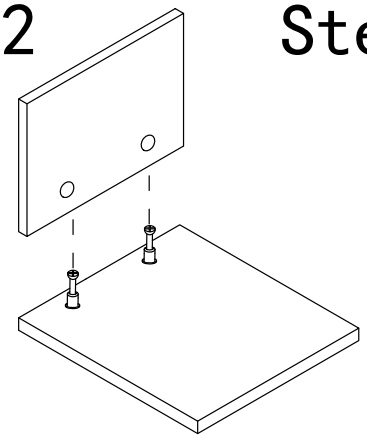


Step3

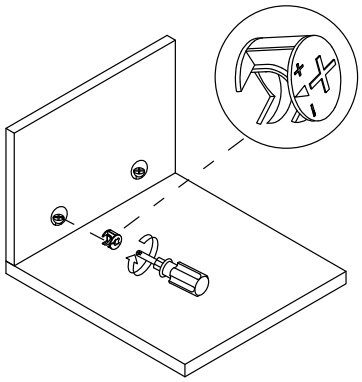

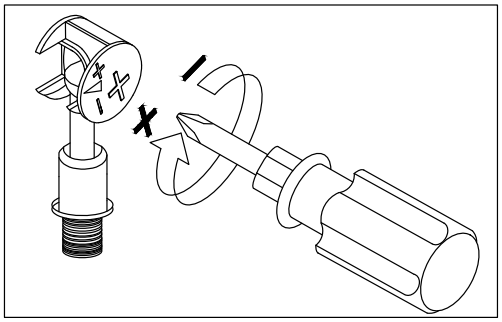



Use a screwdriver to lock in the direction of the "+" sign

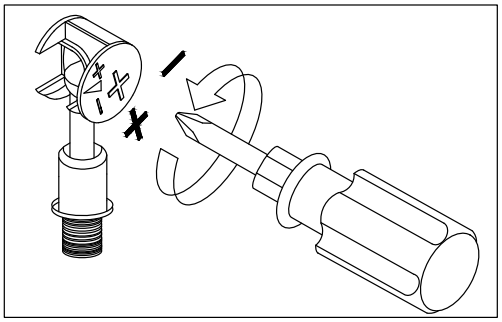


Disassemble along the direction of "-" sign

Step 1




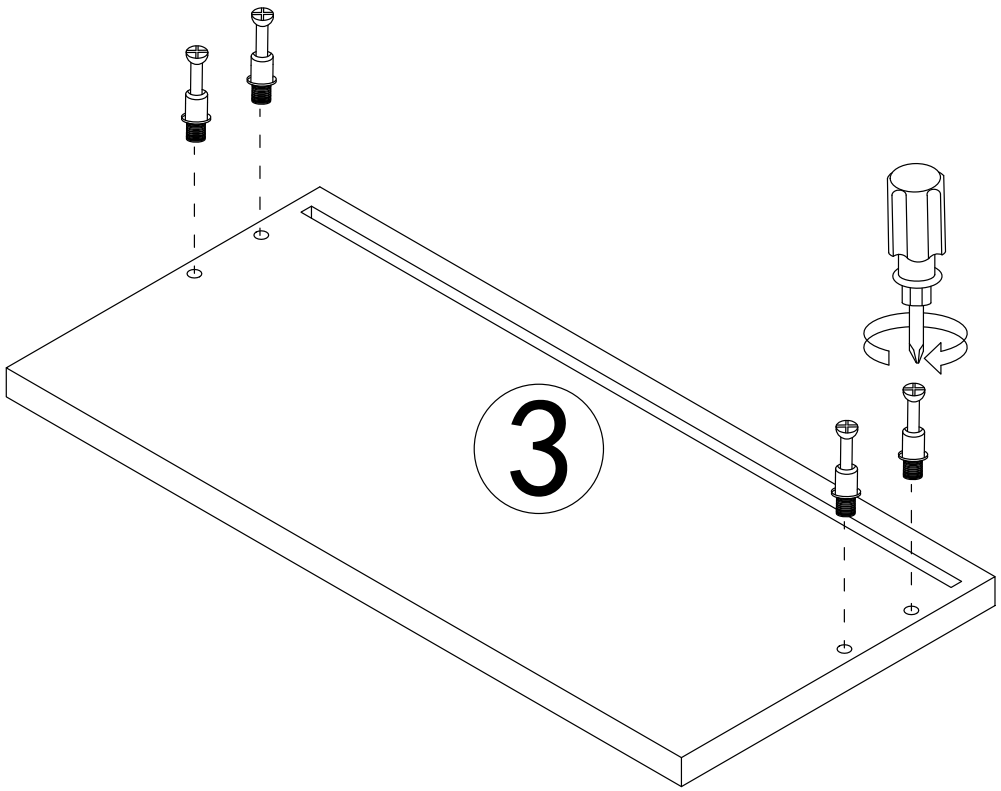


Step 2

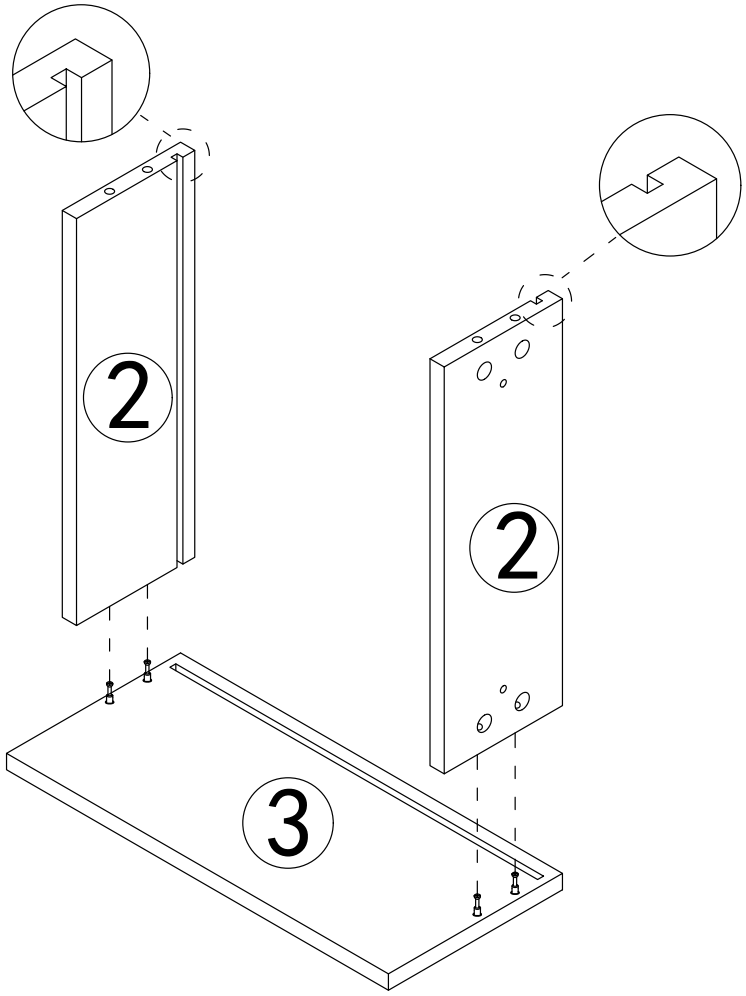


Step 3

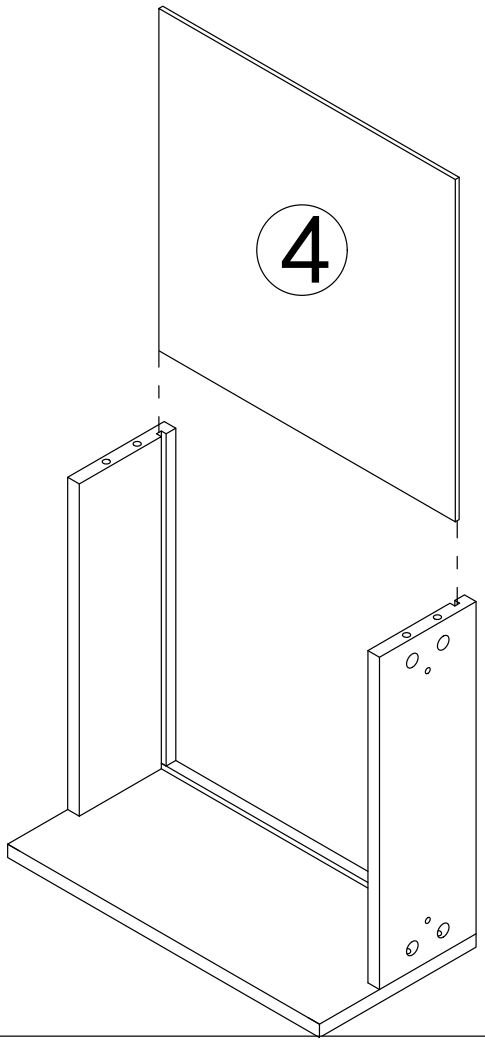

Step 4

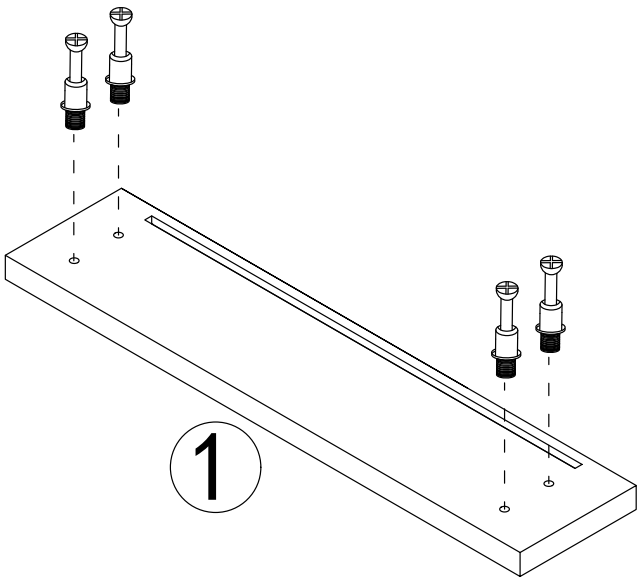


A



x4

Step 5

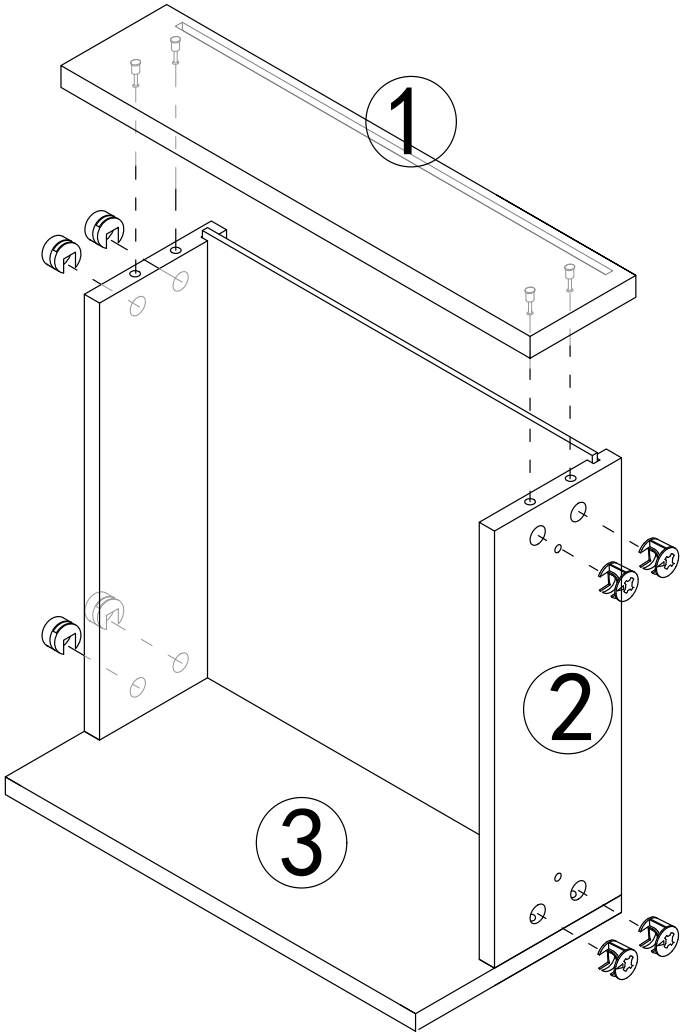


B



x8


Use parts D

Drawer rail breakdown diagram

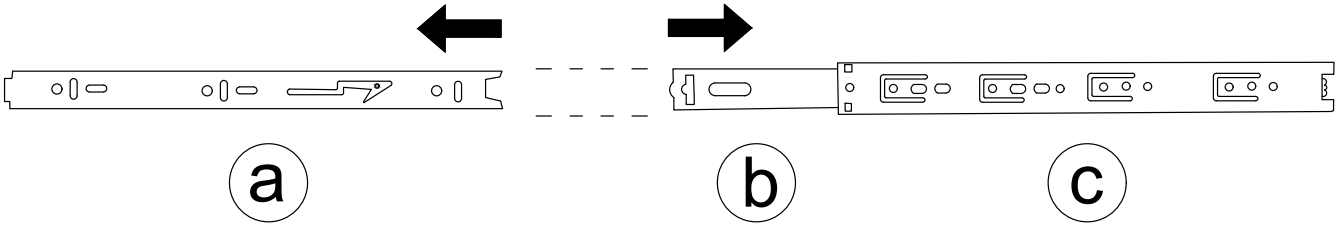


① Dismantle the schematic diagram


Step 1 : Pull the rails apart

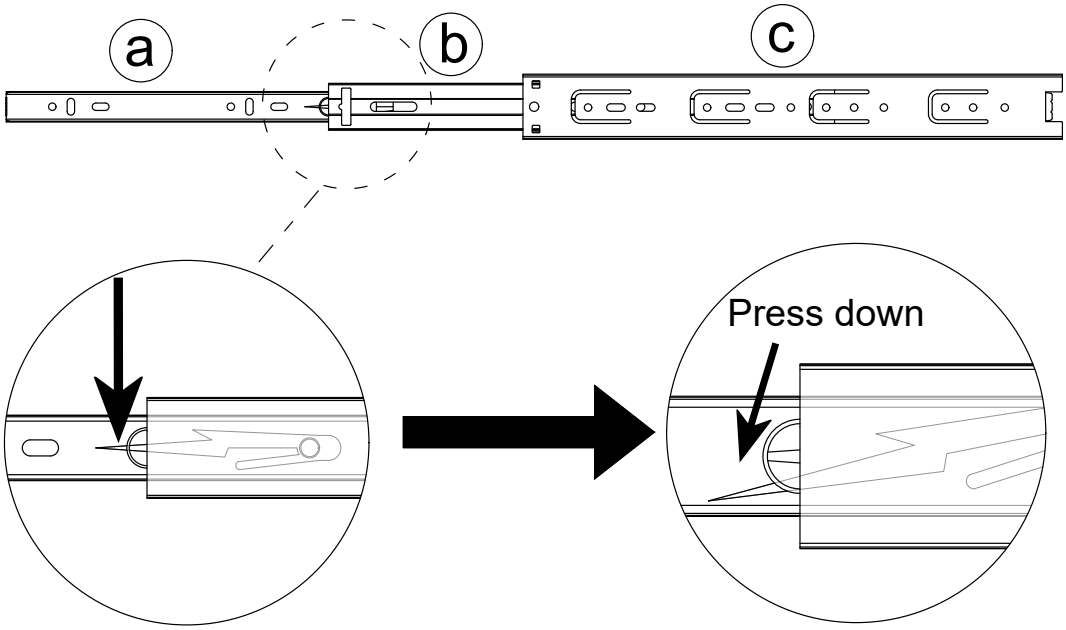


Step 2 : Press the nylon button and pull out ⓐ.


Drawer rail decomposition completed schematic diagram

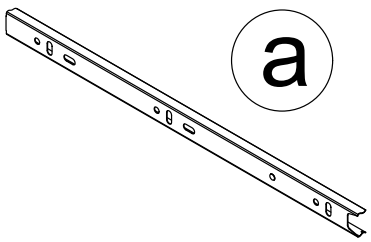

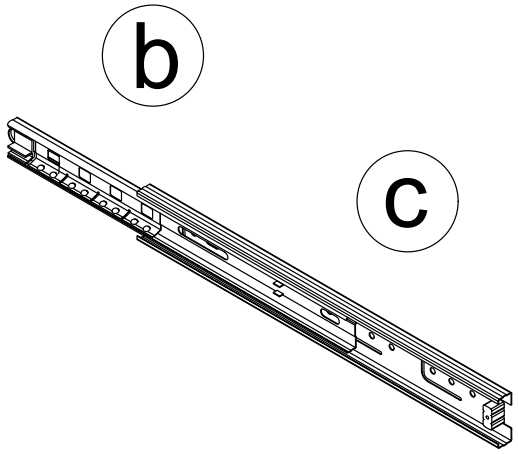


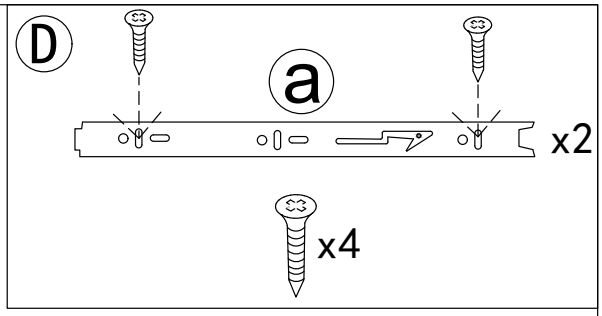

Step 6

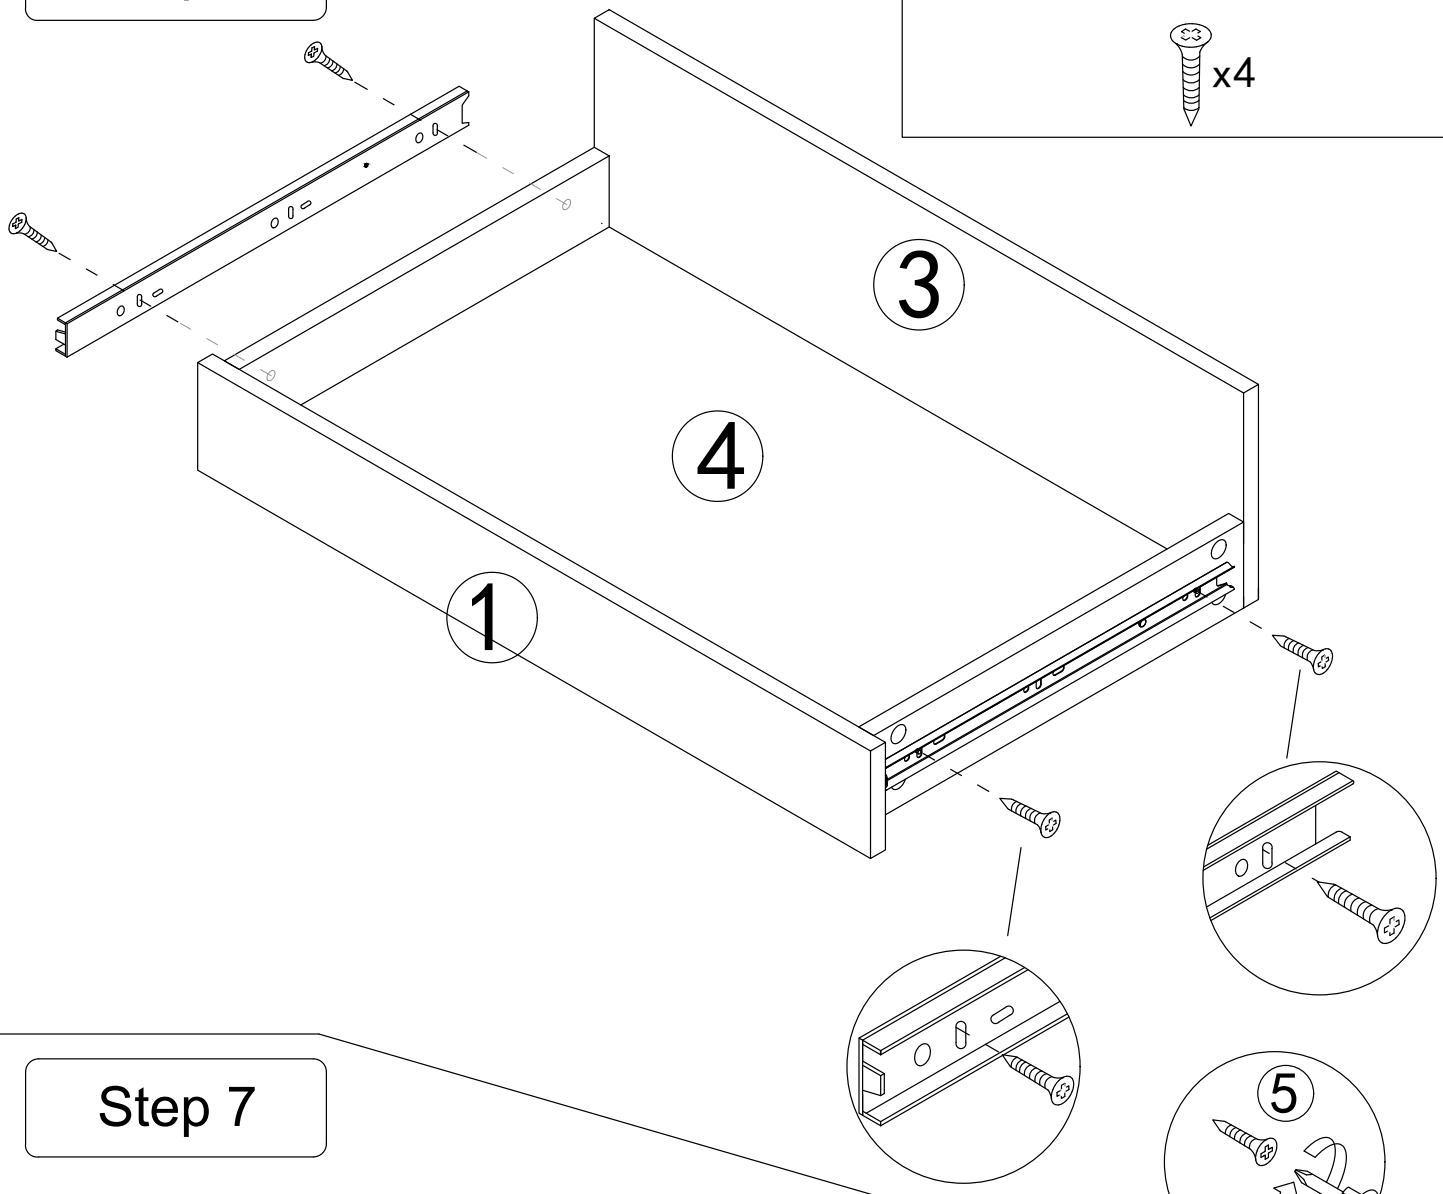


Step 7

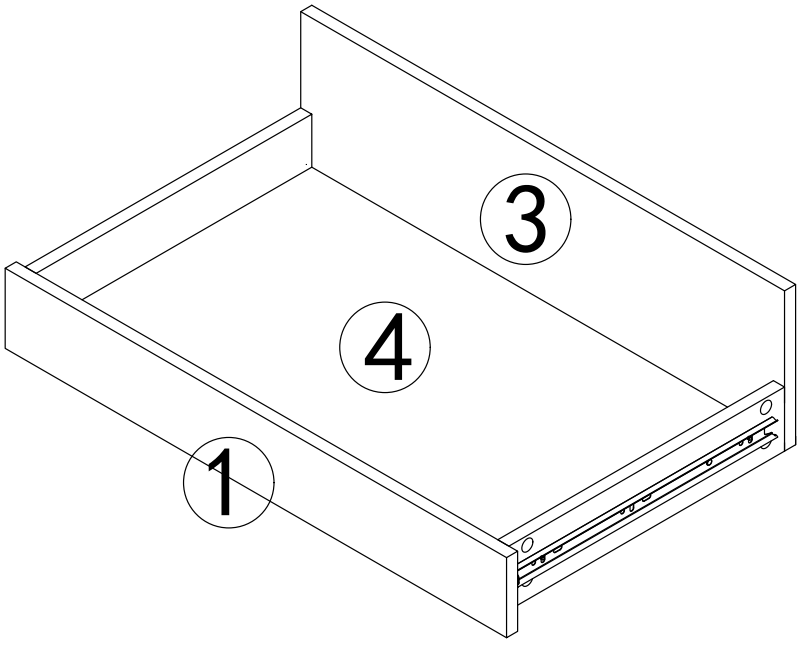

x3


You can repeat the previous steps to obtain 3 identical drawers.

Product structure decomposition

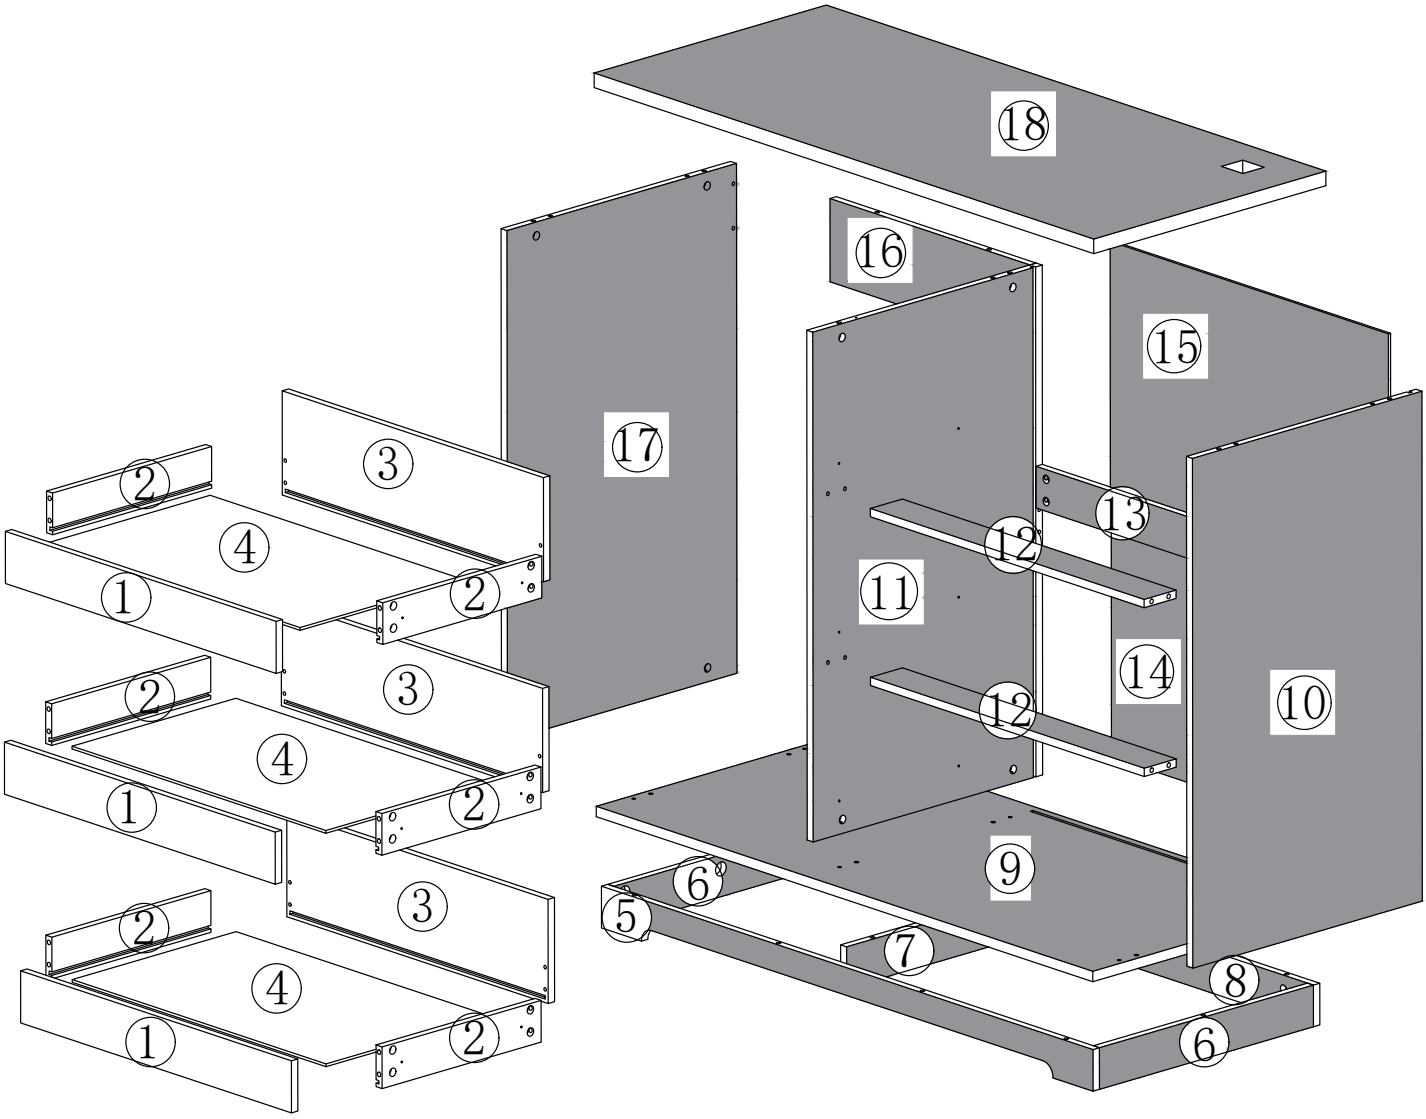


Step 8

A x8

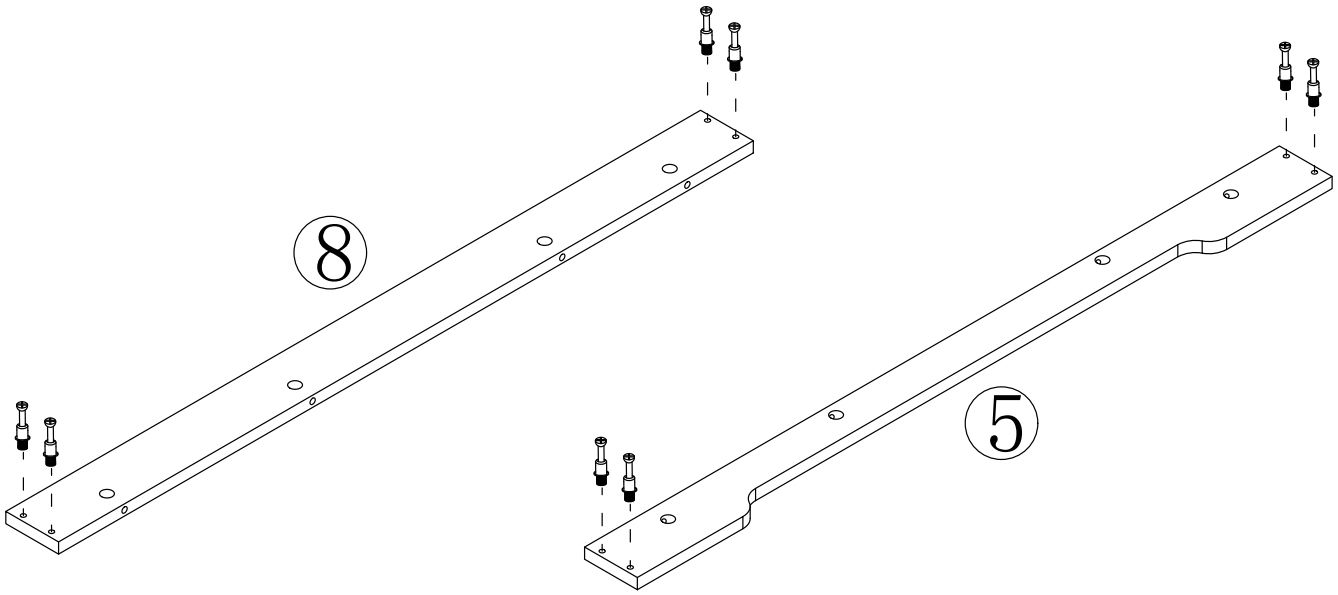


Step 9

B x8

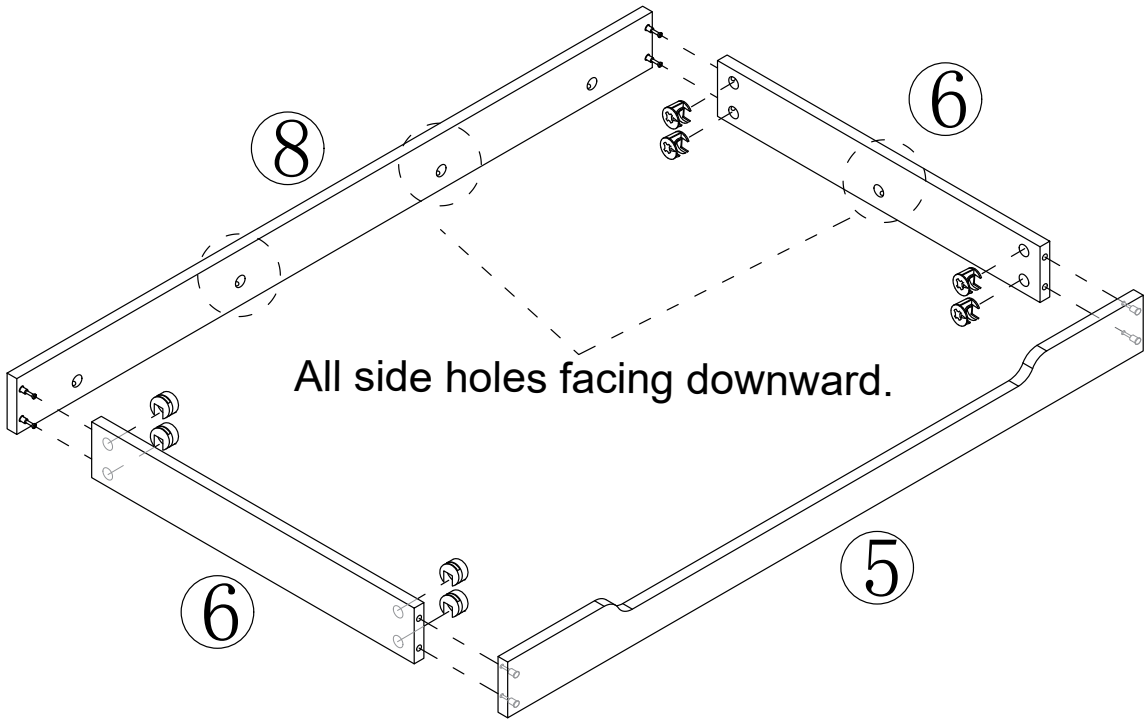


Step 10

A x13

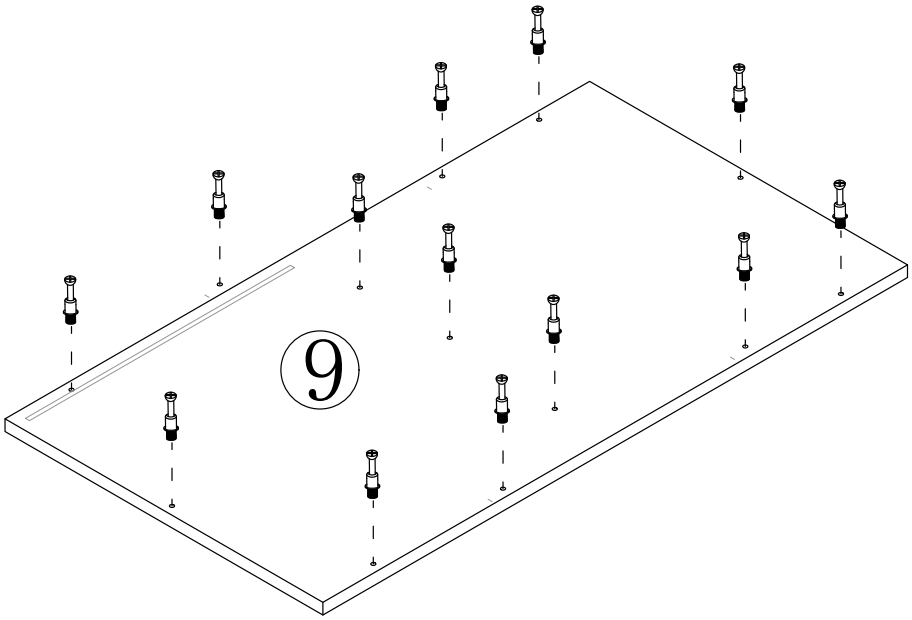

Step 11


B x10

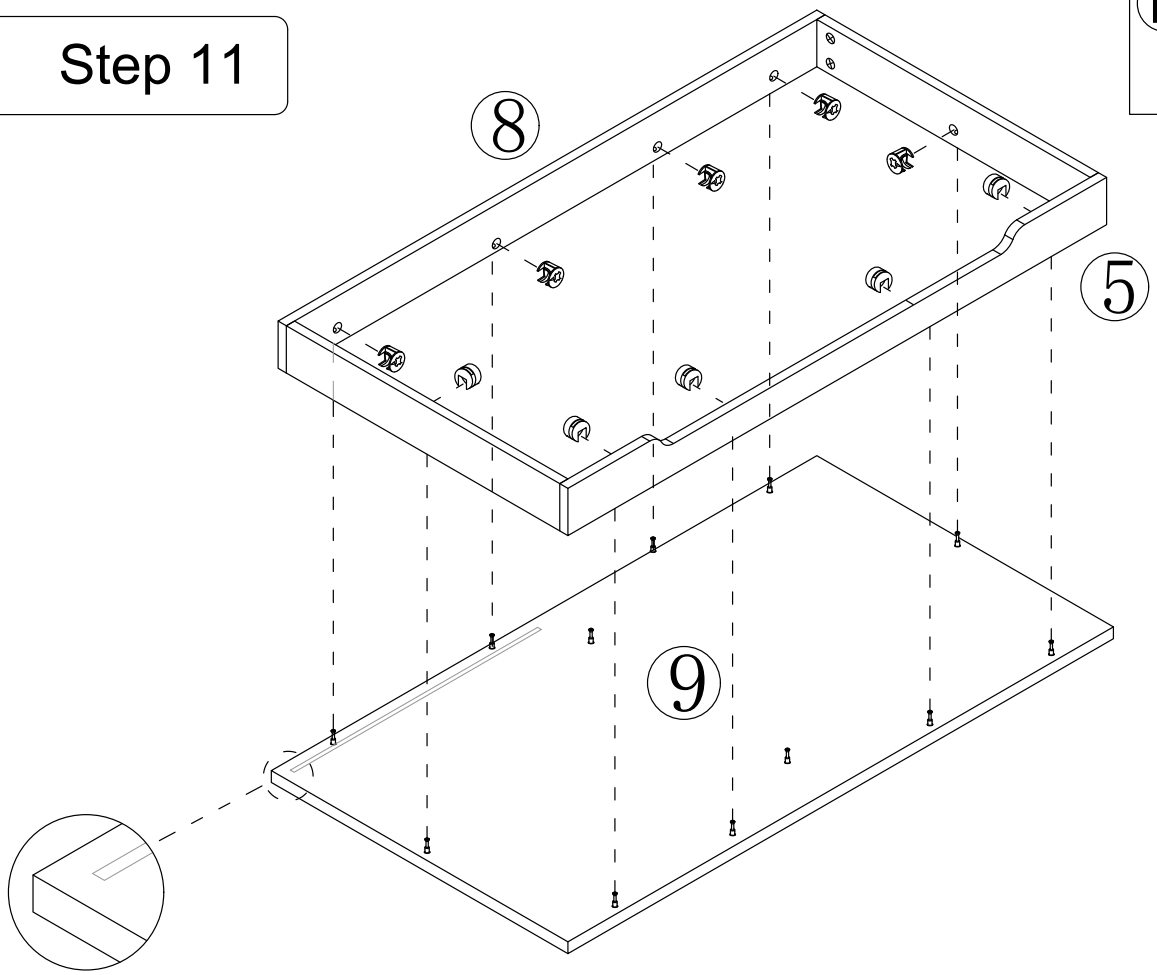

Note: When installing the F board to the H board,
note that there is a groove under the H board.

Step 12


B x3

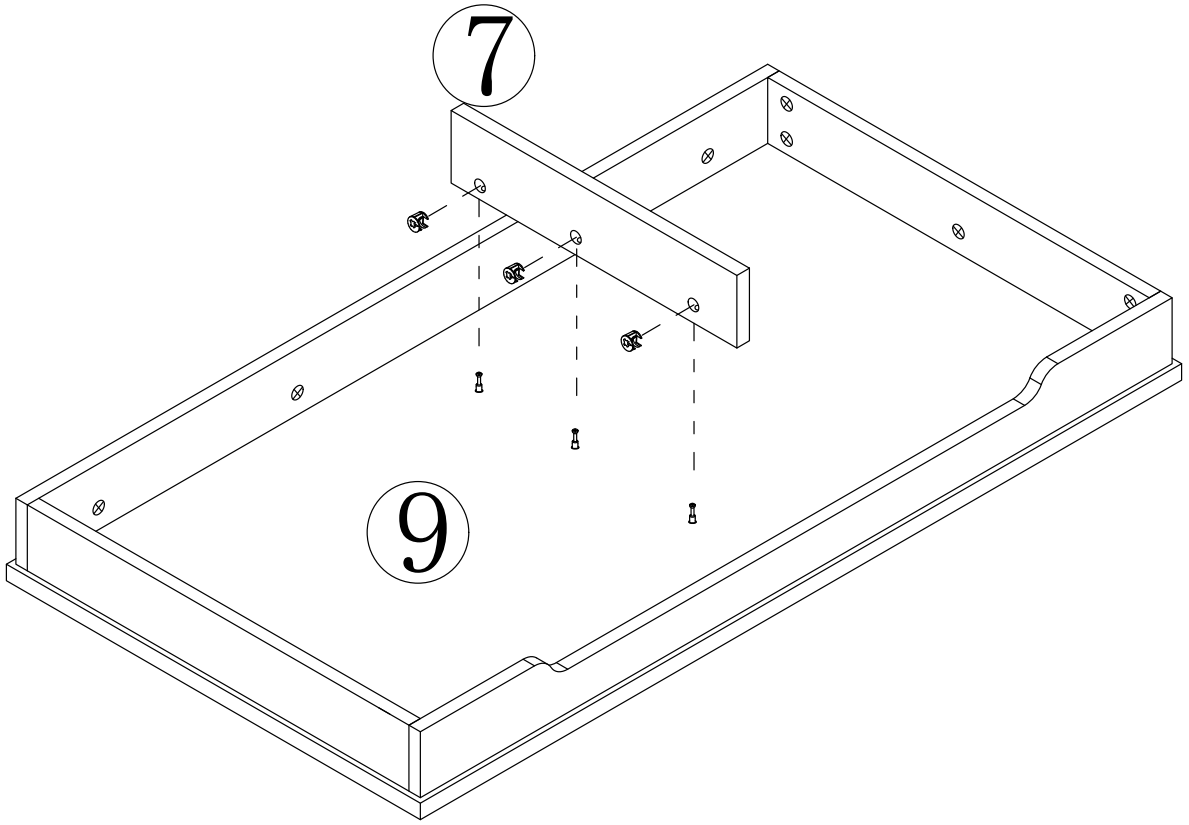


Step 13

E x6


Tear off release paper and stick the black foot pad on the board

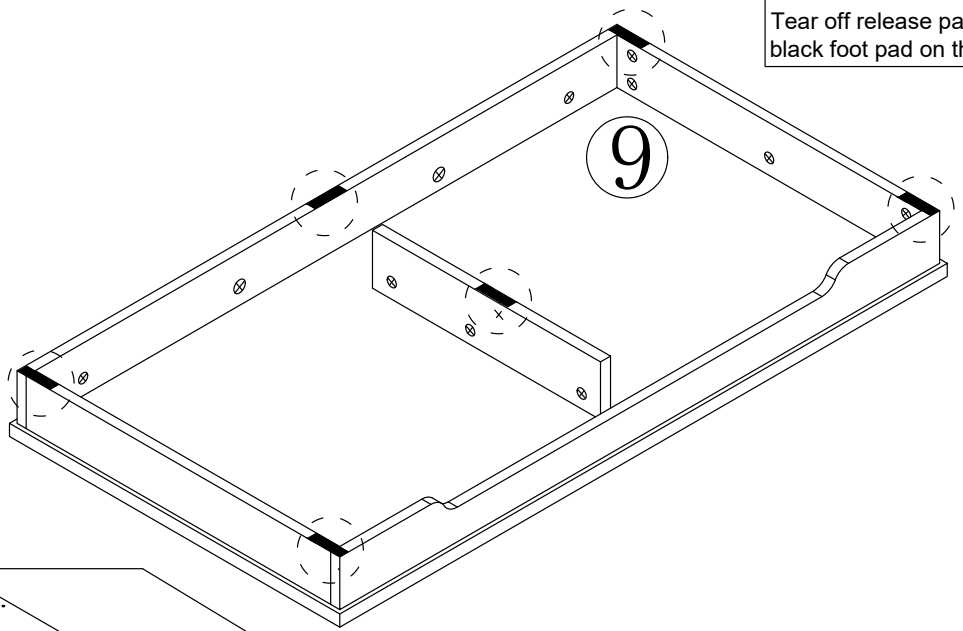


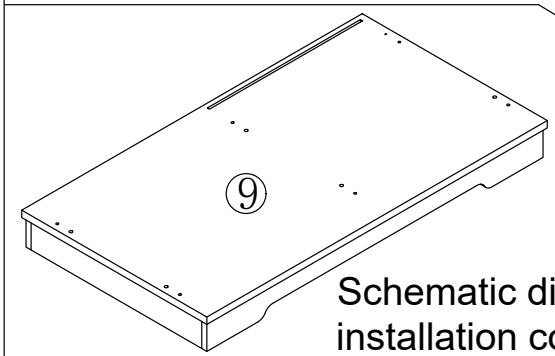


Schematic diagram of installation completion

Step 14

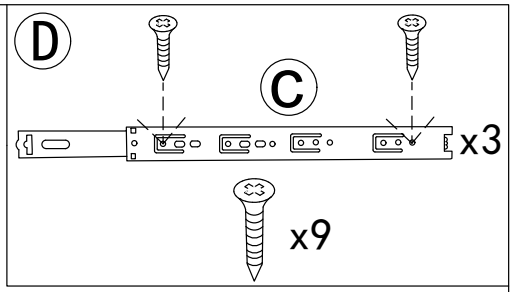


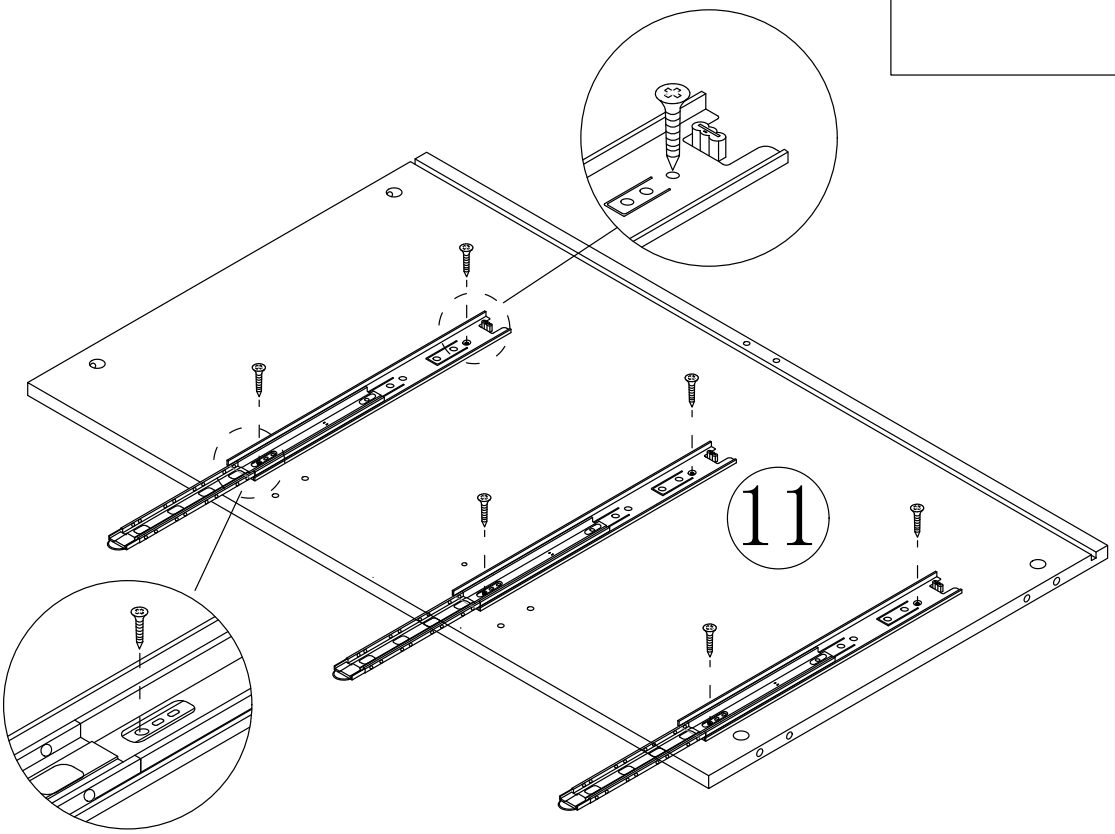


Step 15

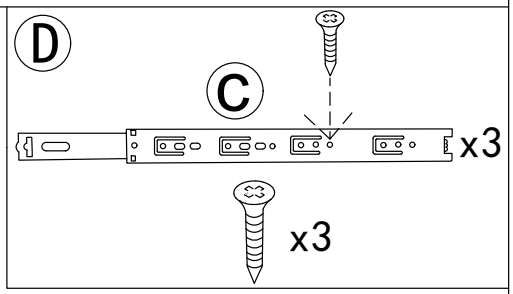


This hole is a reinforced fixing hole which can be installed as required

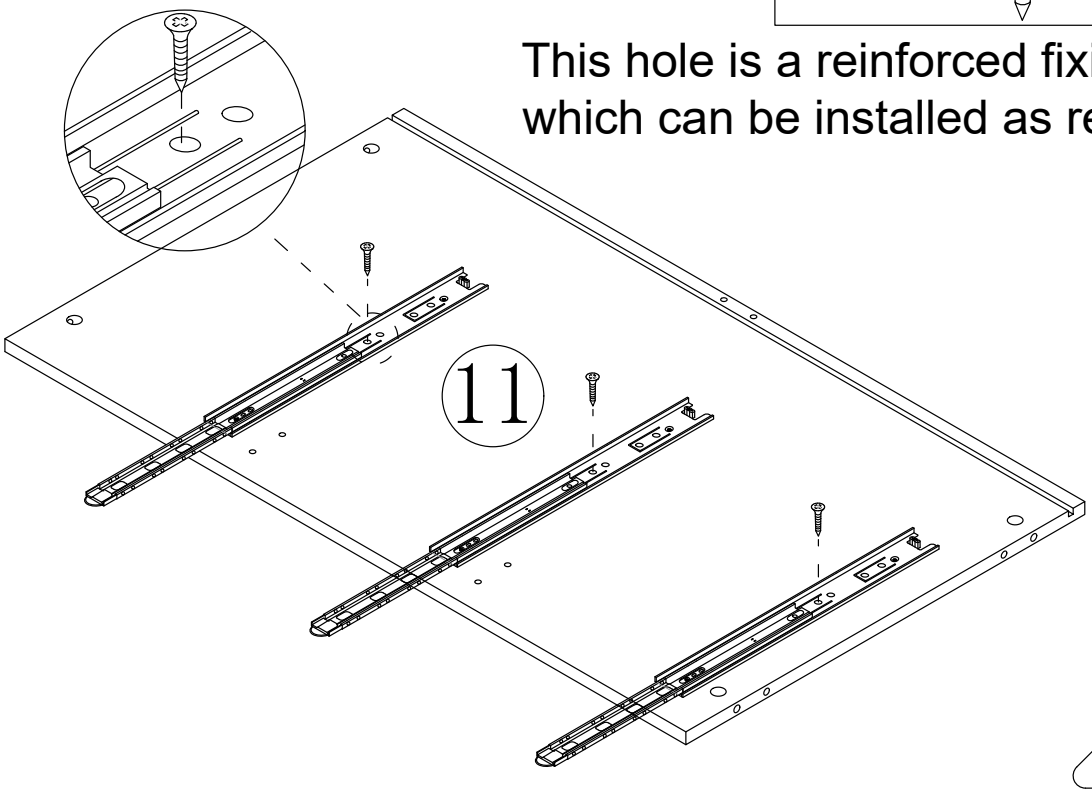



Step 16



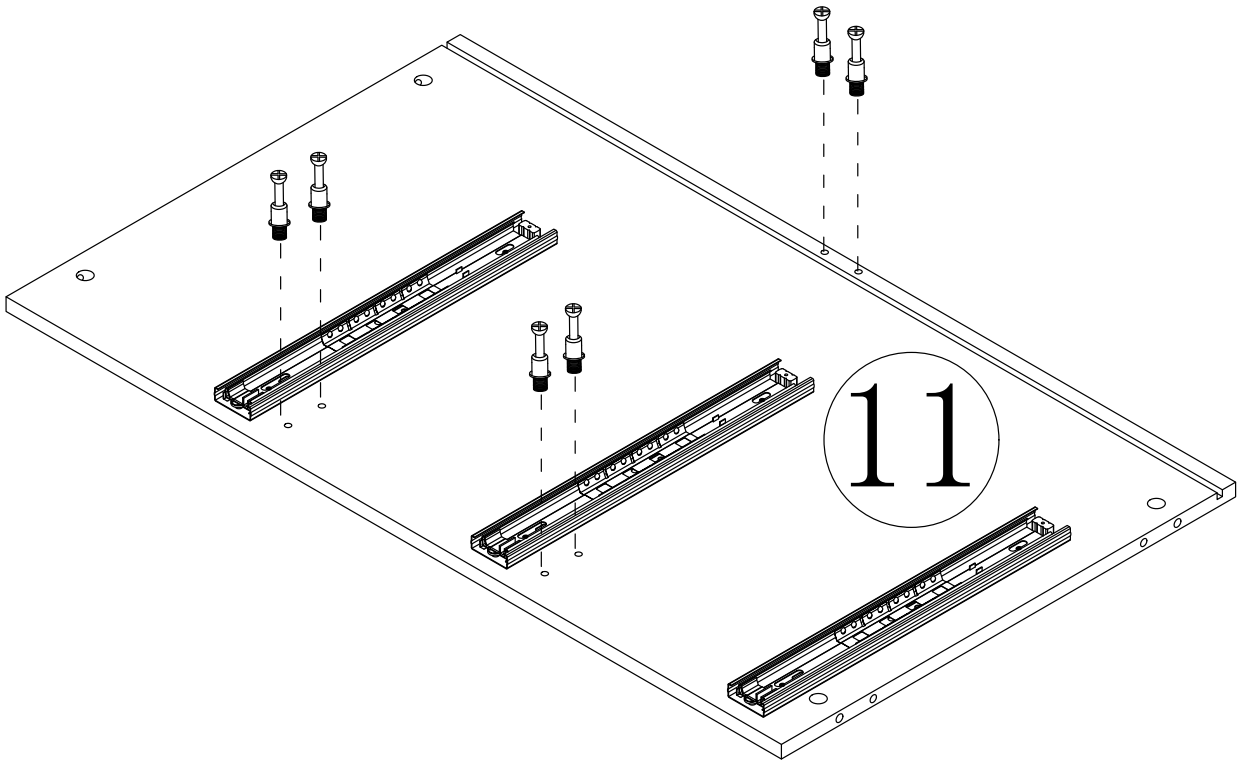


Step 17

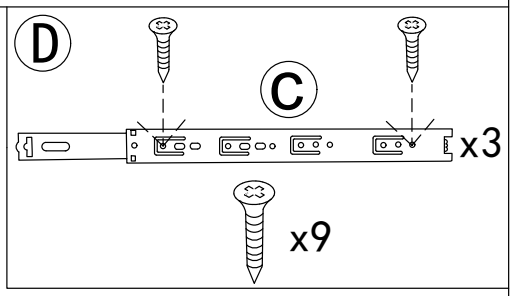


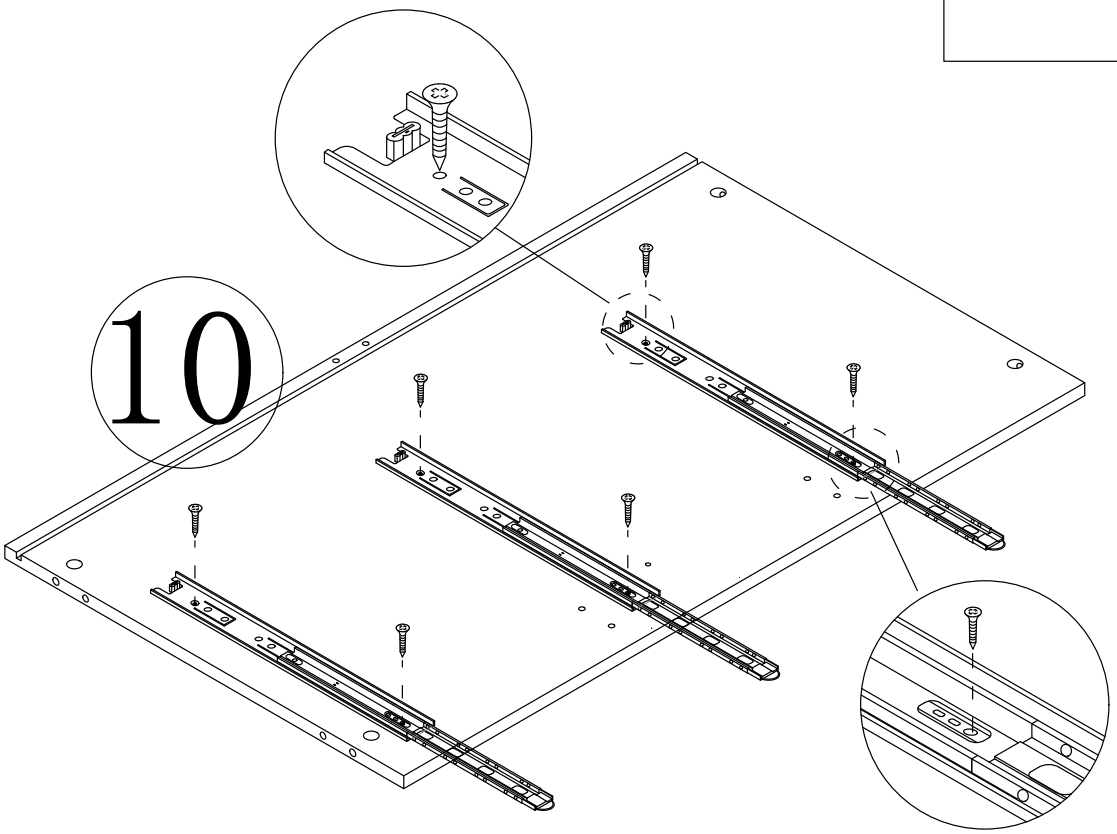


Step 18


This hole is a reinforced fixing hole which can be installed as required

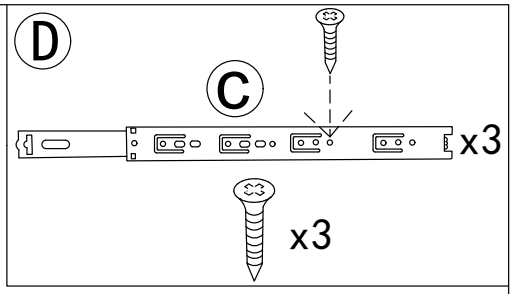

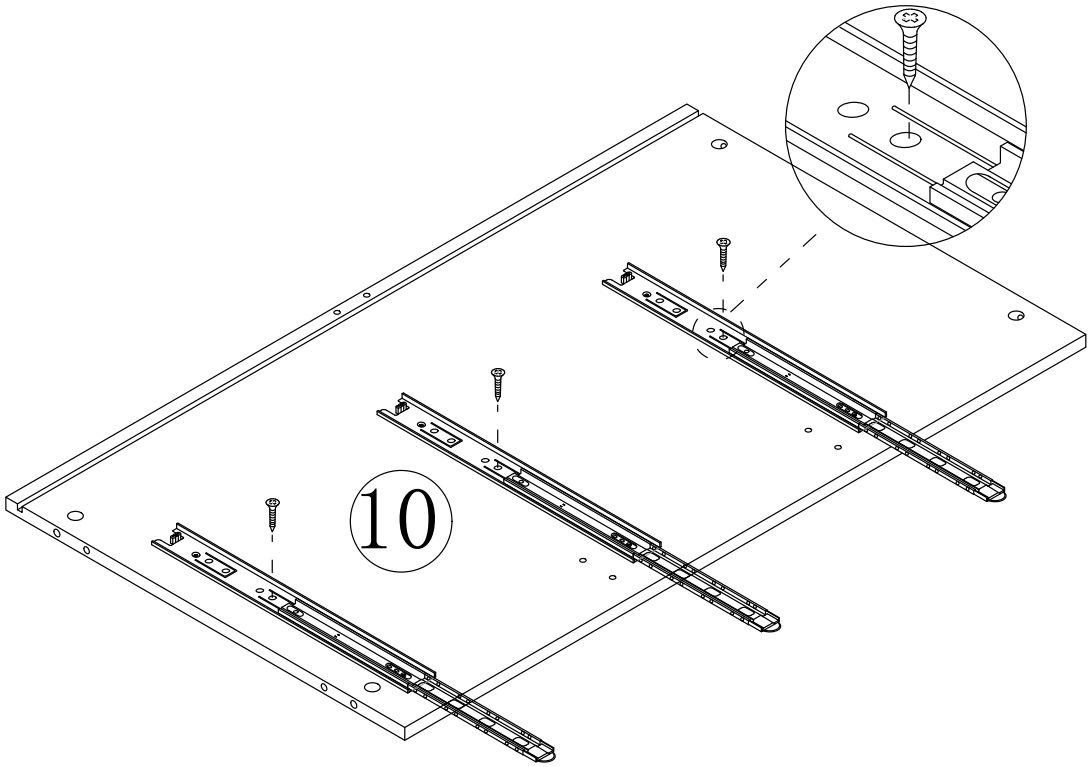


Step 19



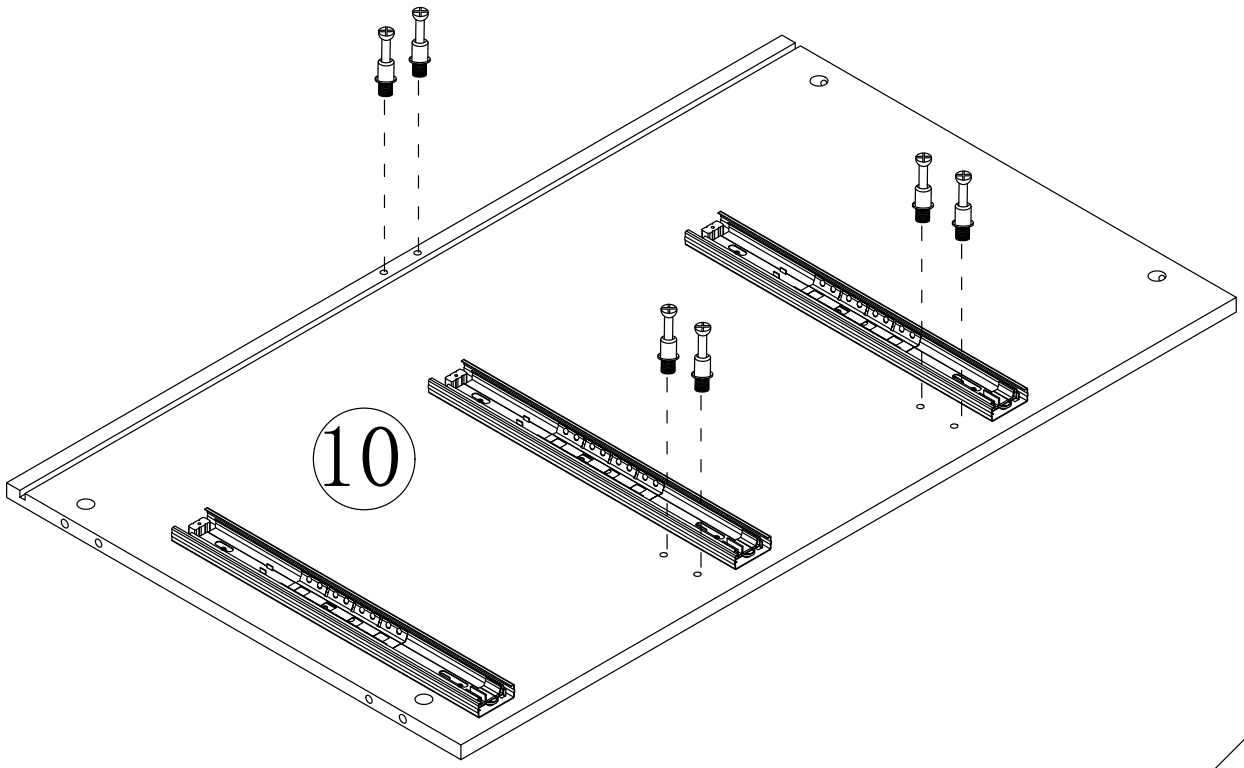


Step 20


B x6

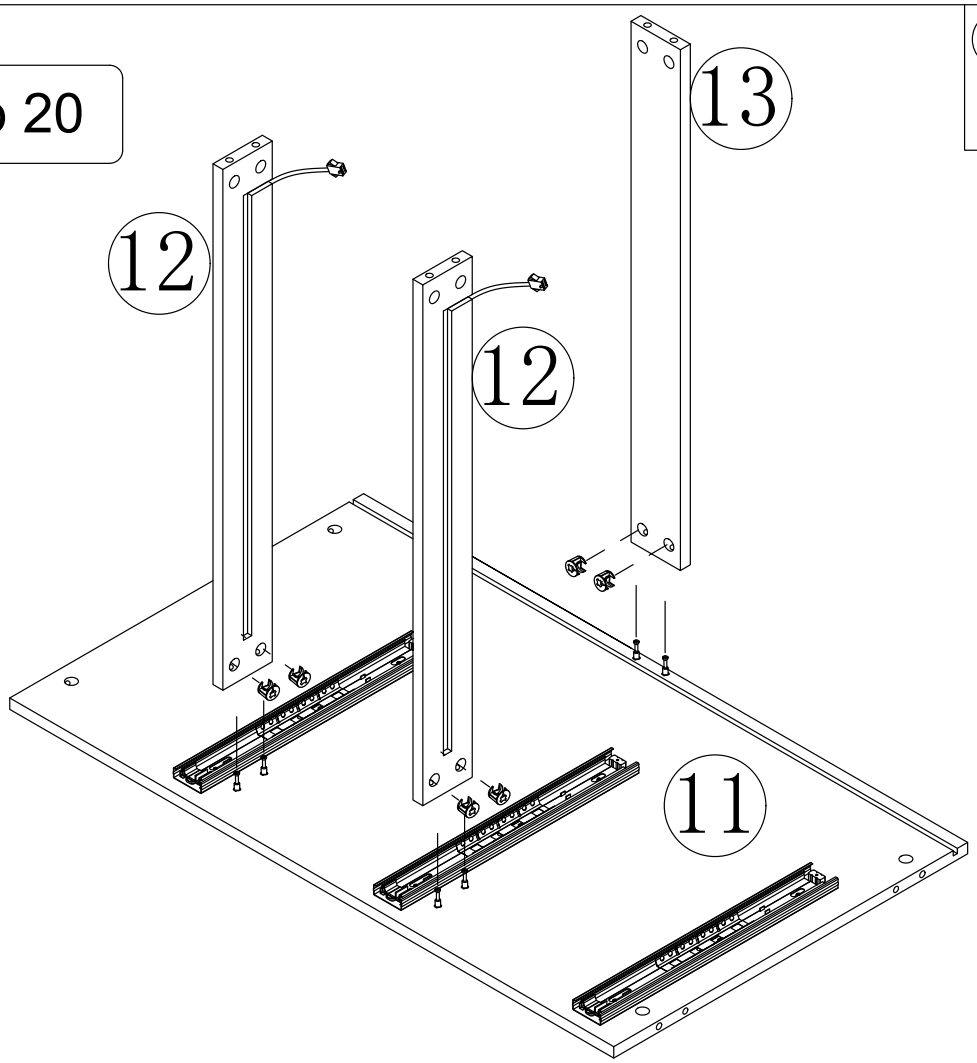

Step 21

B x6

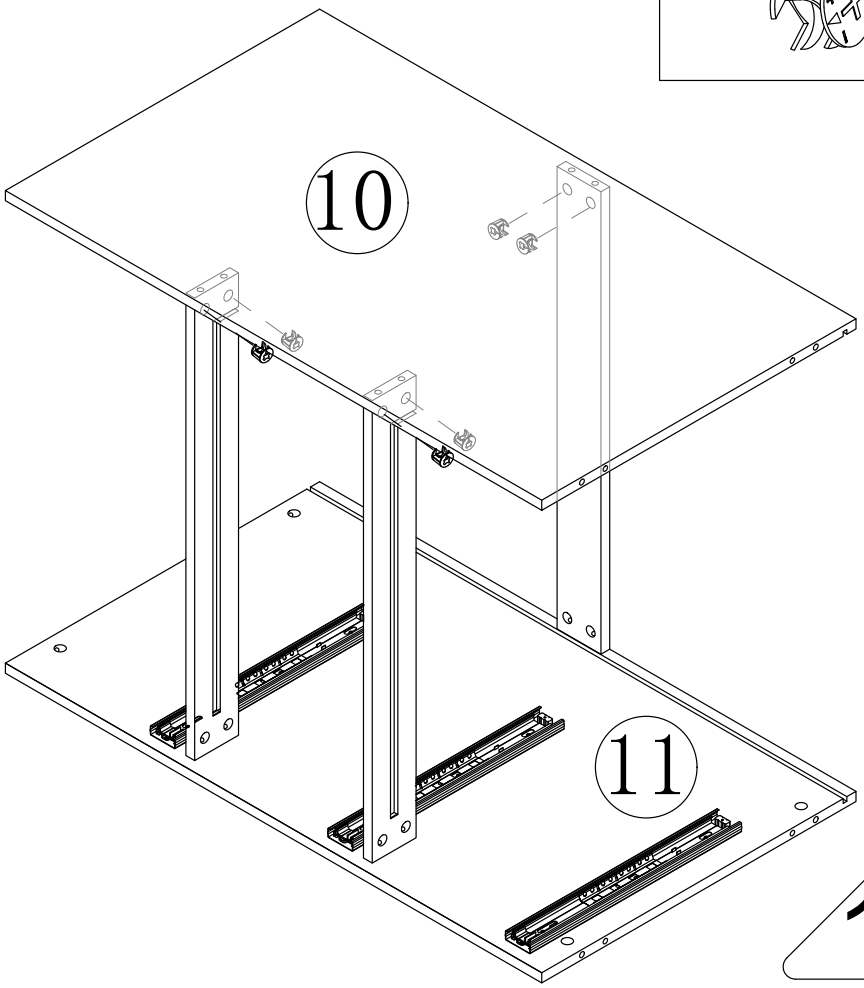


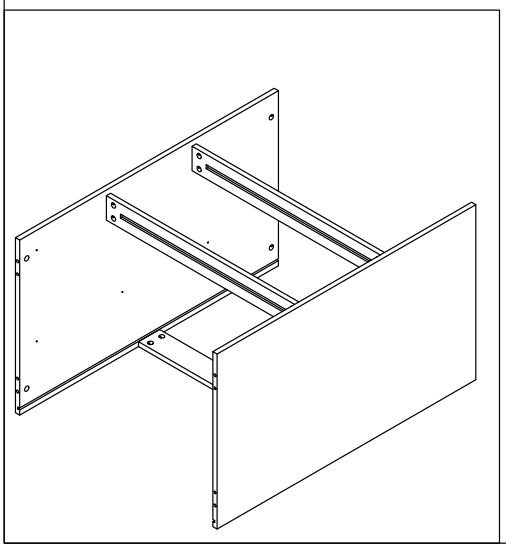

Step 22


A x6

C x6

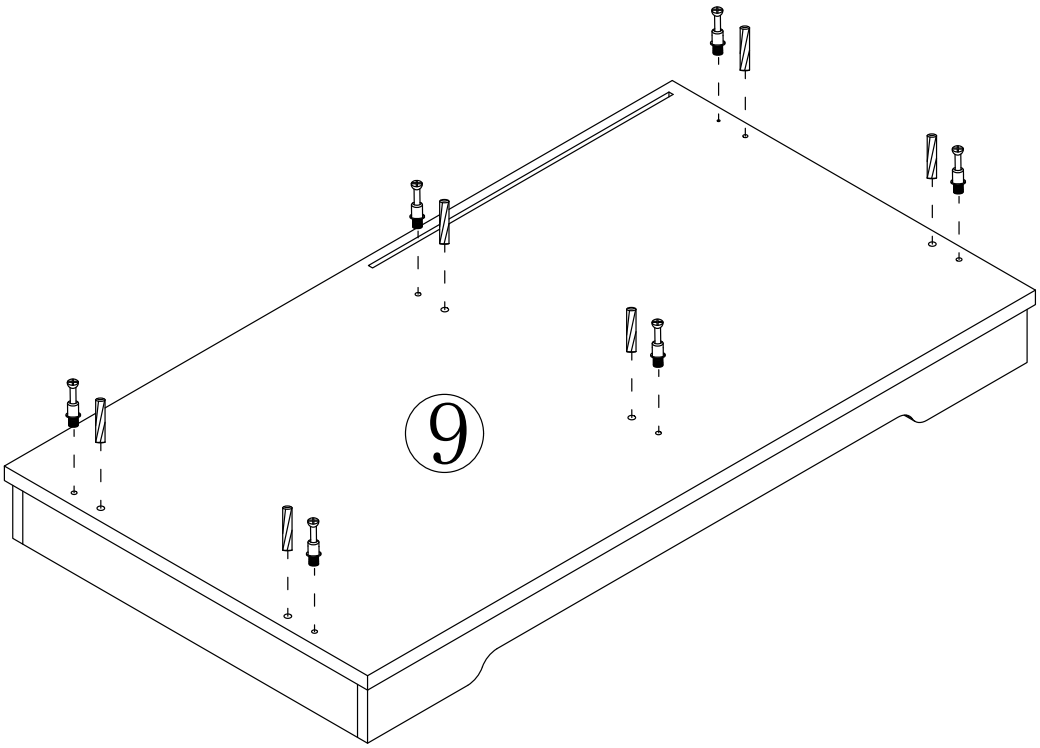

Step 23


B x4

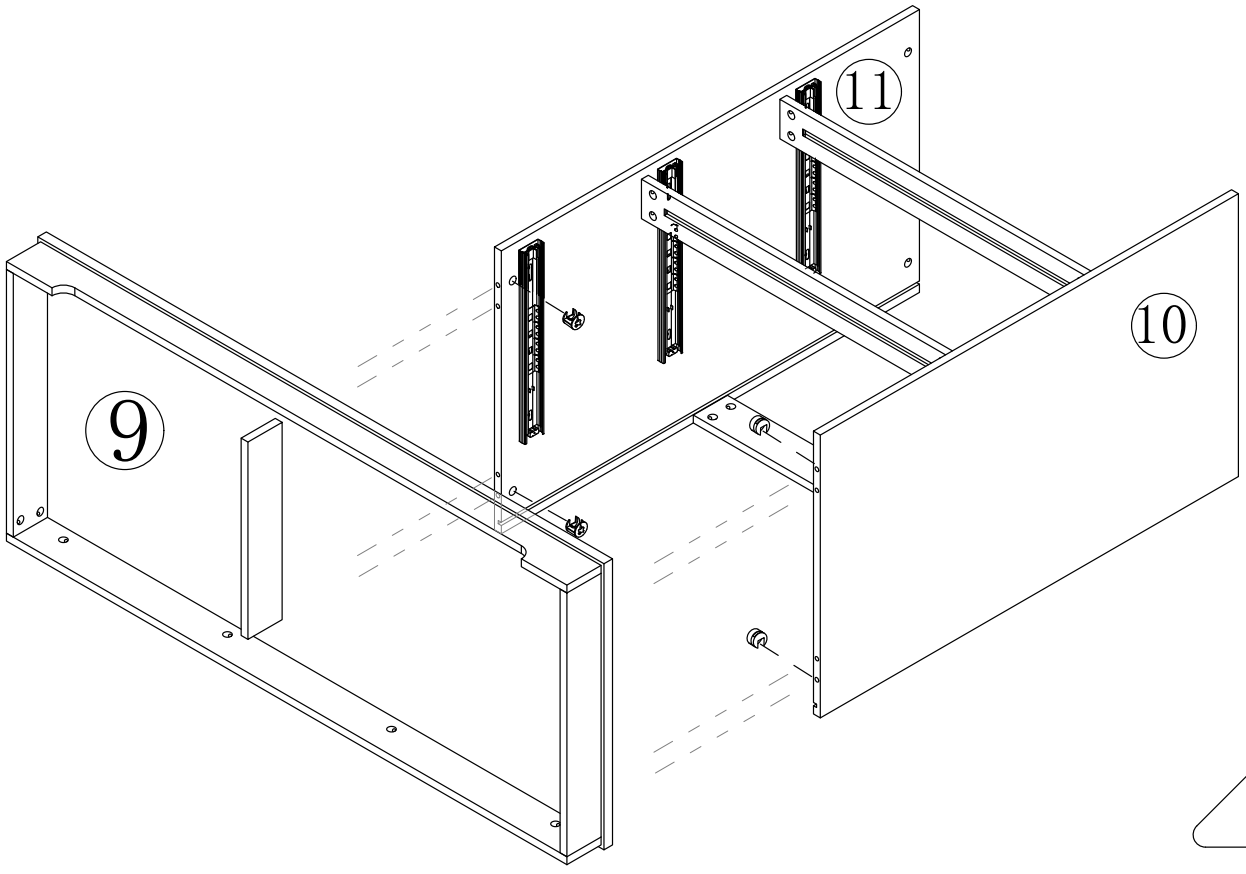

Pay attention to the position of the hole


A x2

Step 24

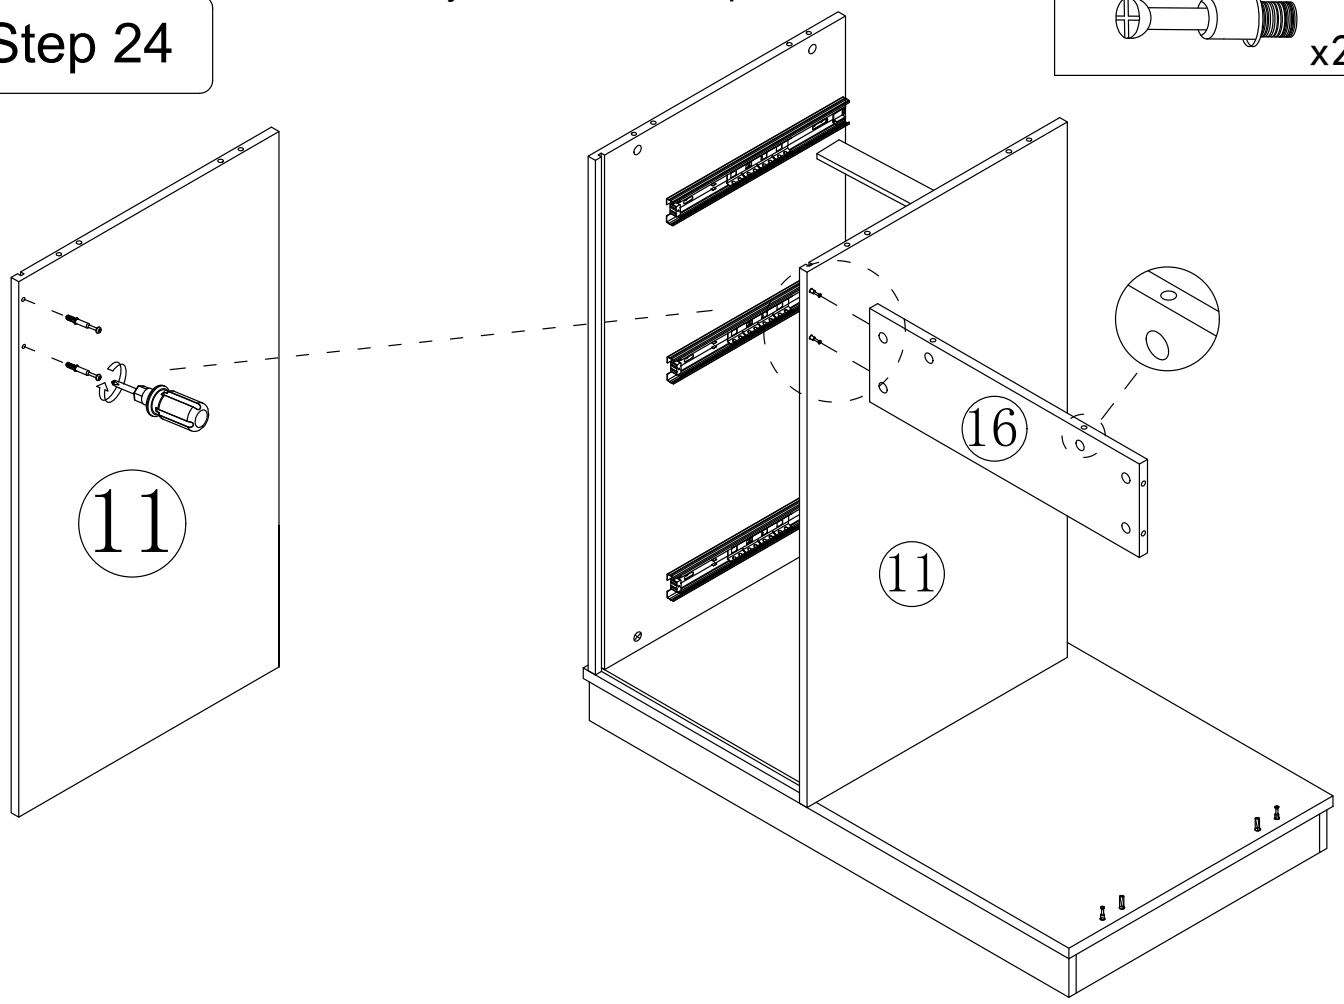

A x2

Step 25

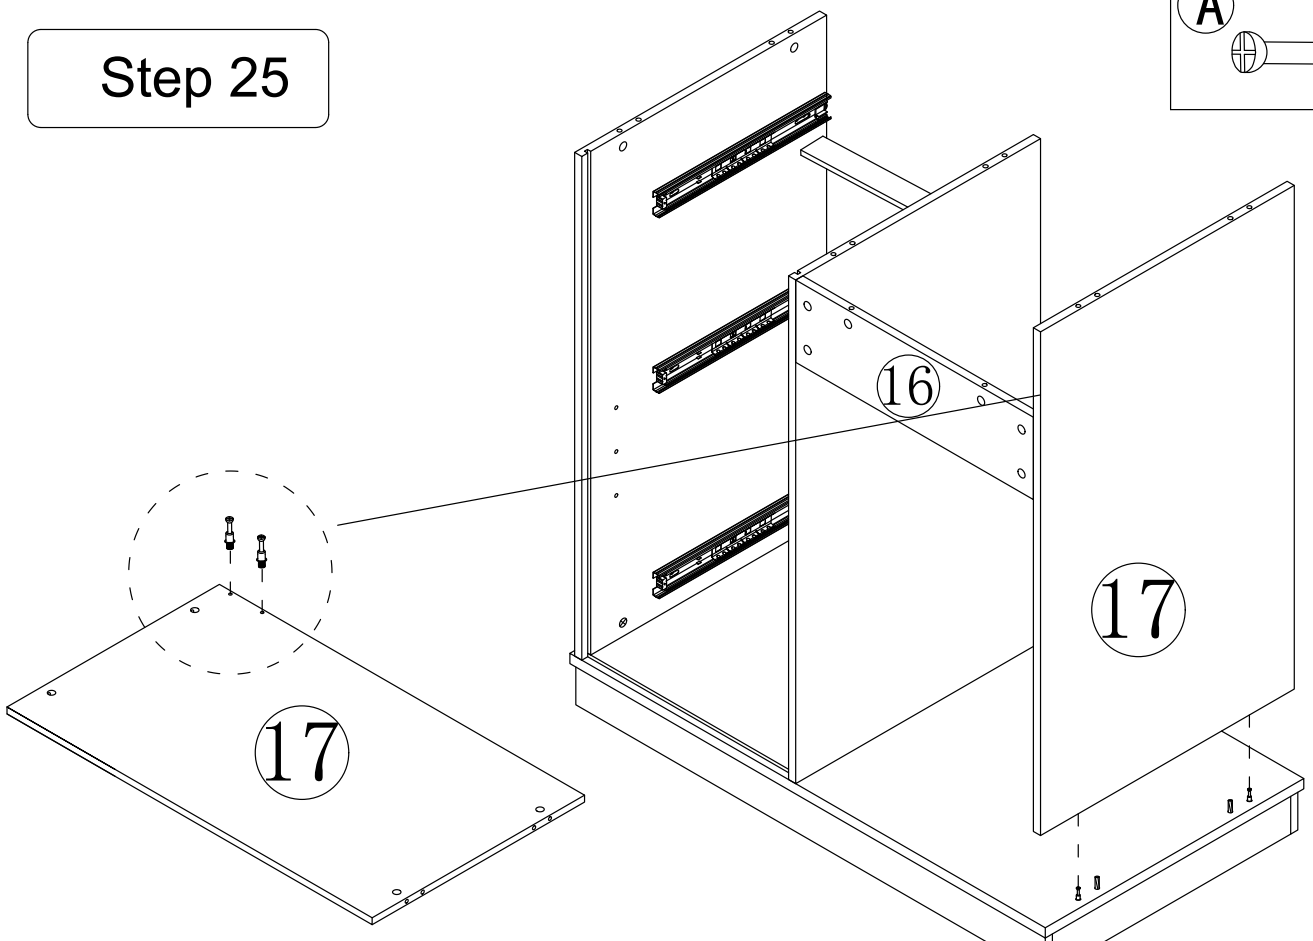


Insert Panel （17） into Panel（9）, but do not tighten it to facilitate subsequent installation.

Step 26


B x4

Bend the (17) plate a little outward to facilitate the installation of the (16) plate

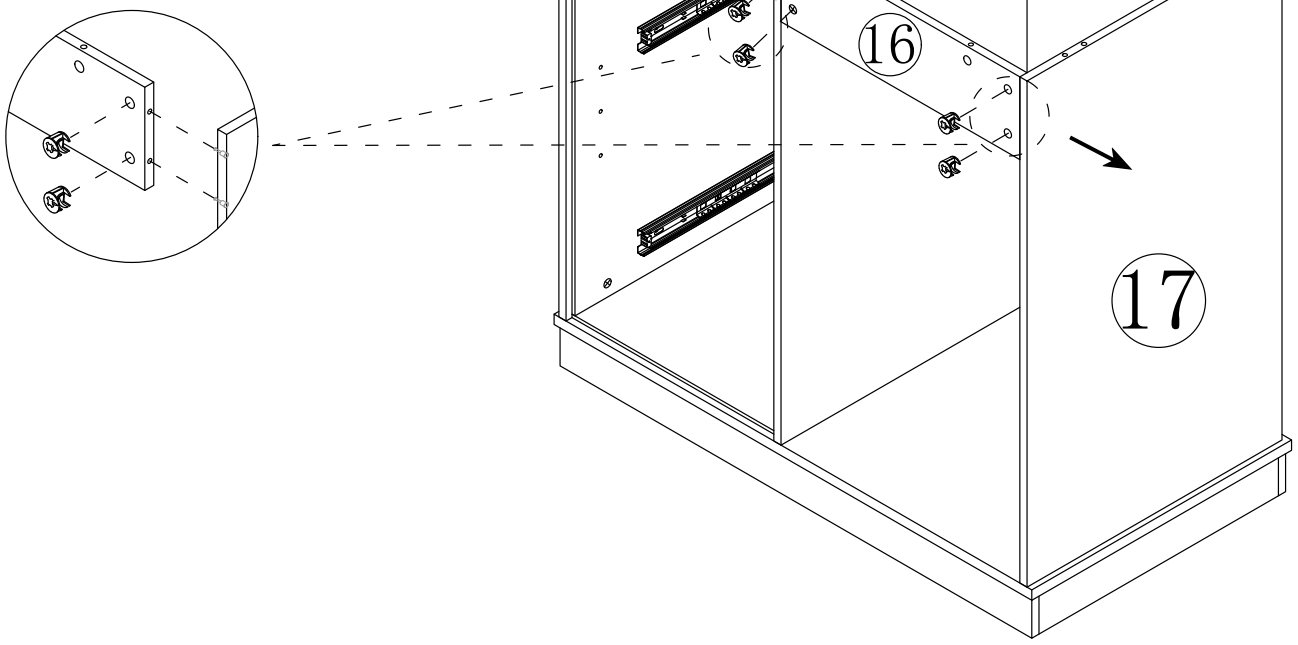


Step 27

B x2

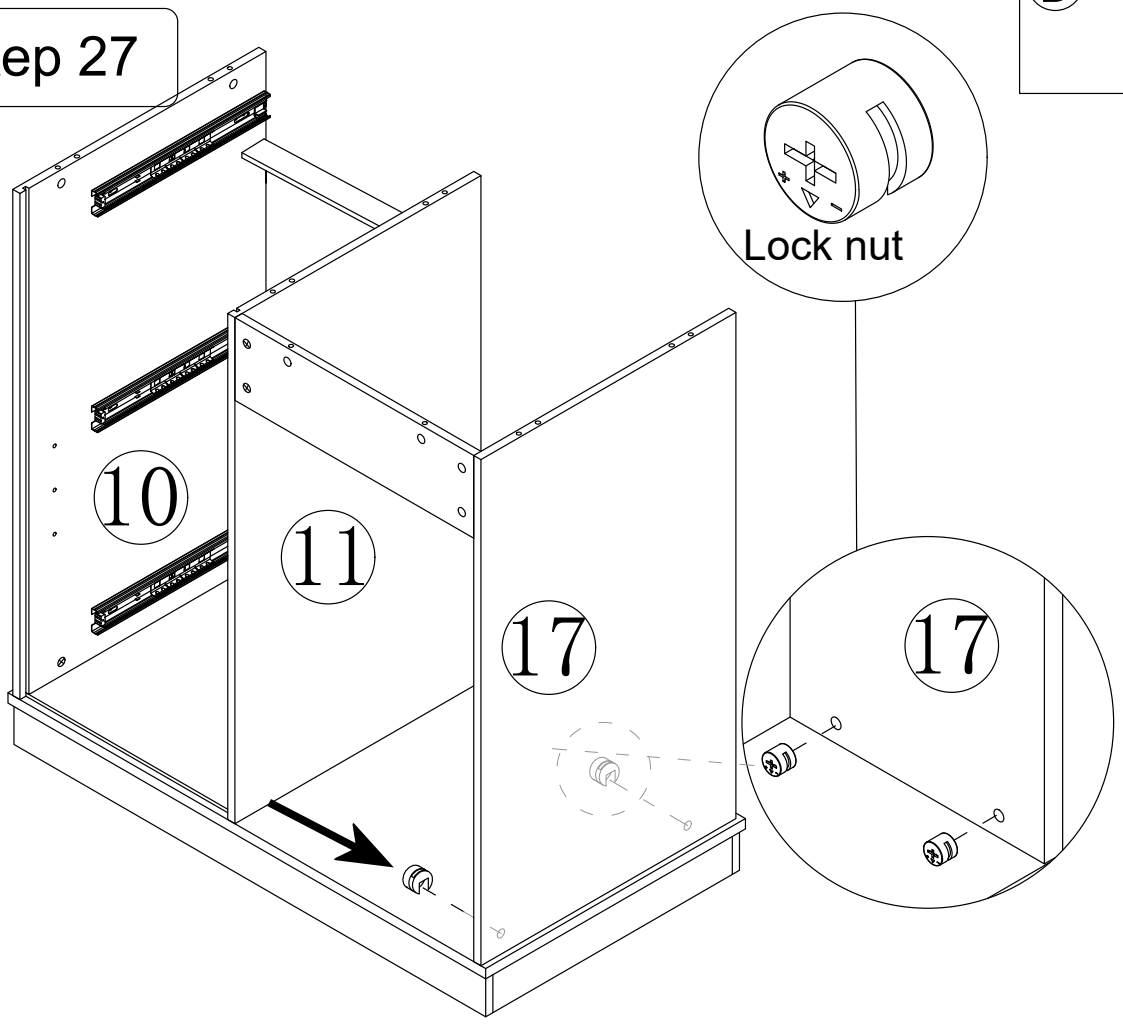


Step 28

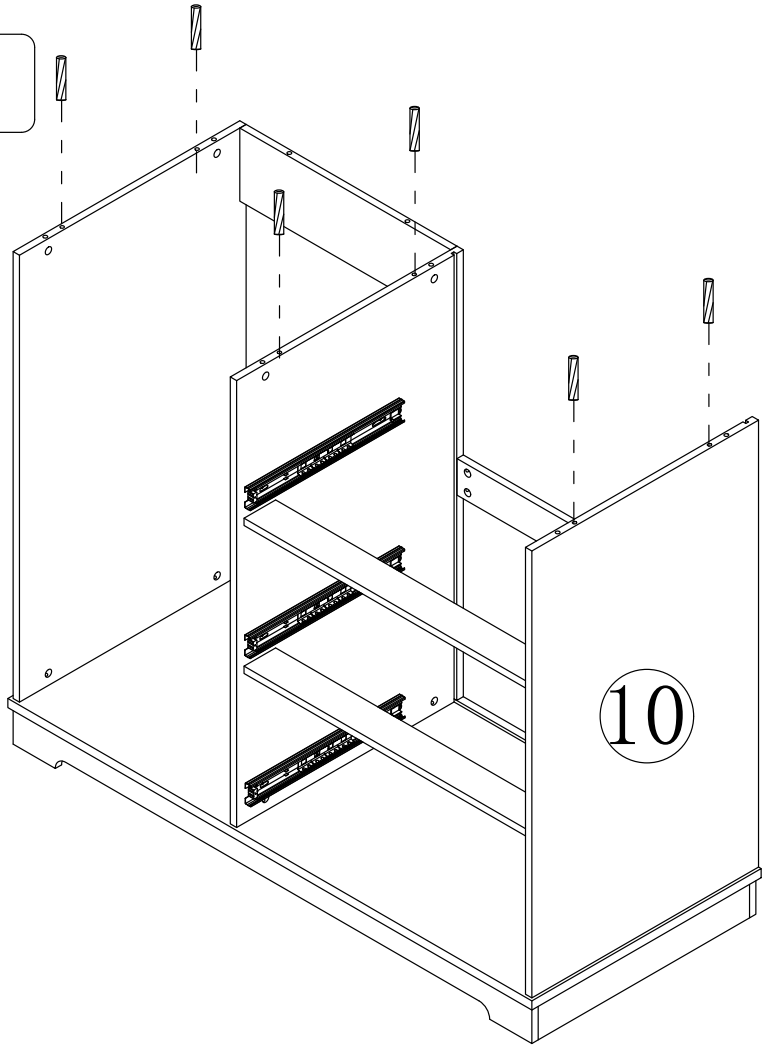


C x6


Step 29

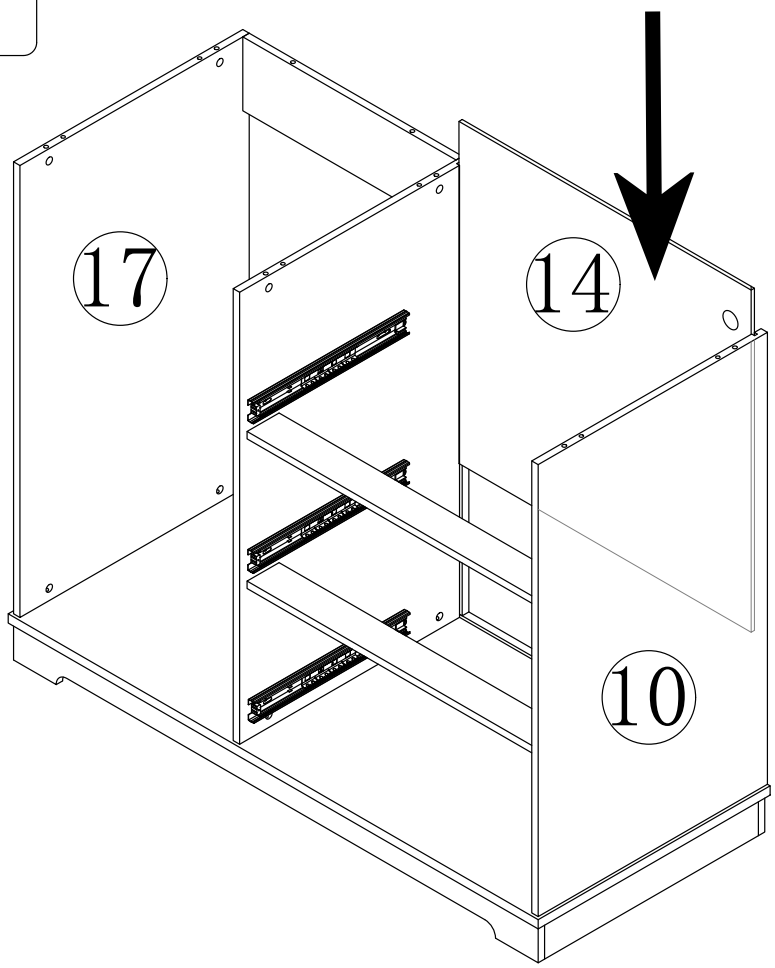



Step 30

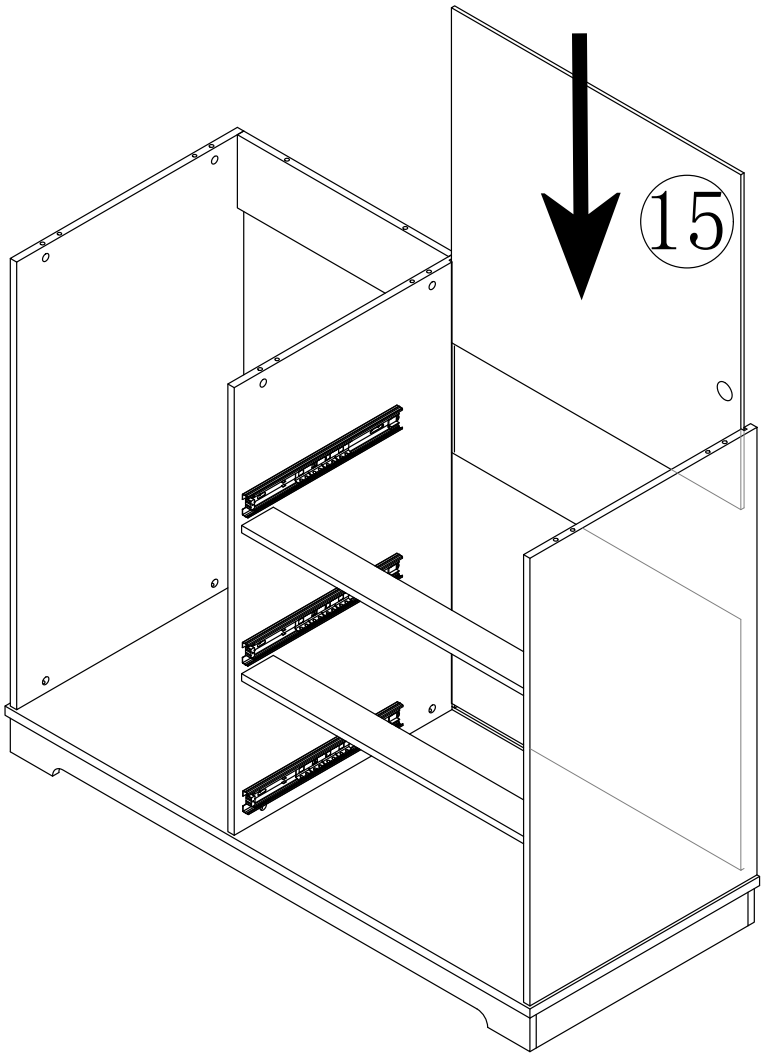


Step 31

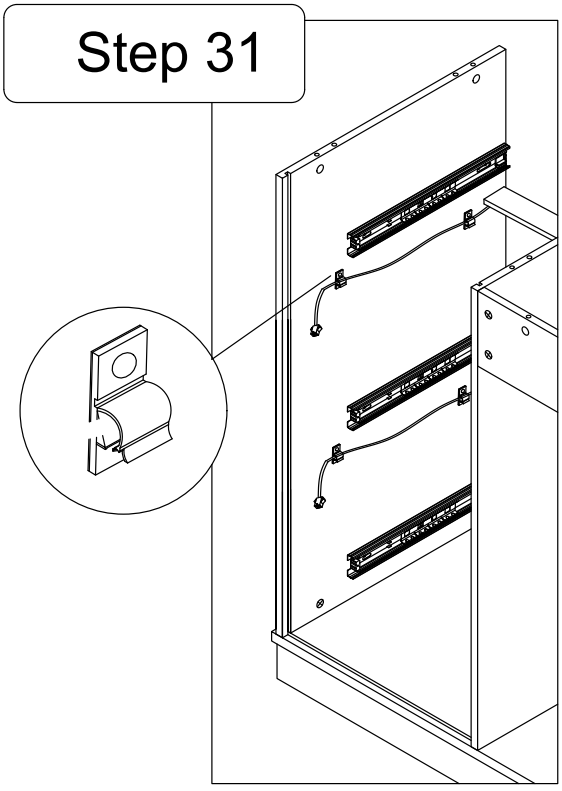


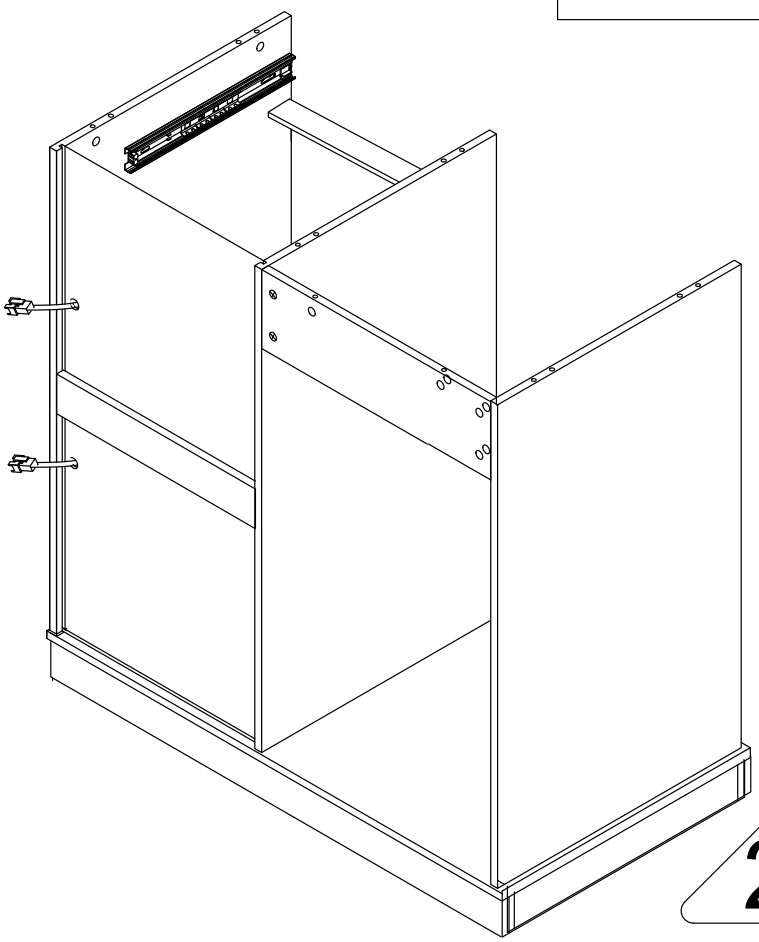





Step 32

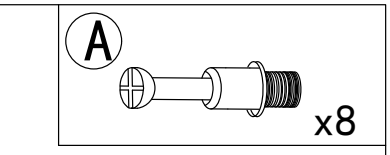


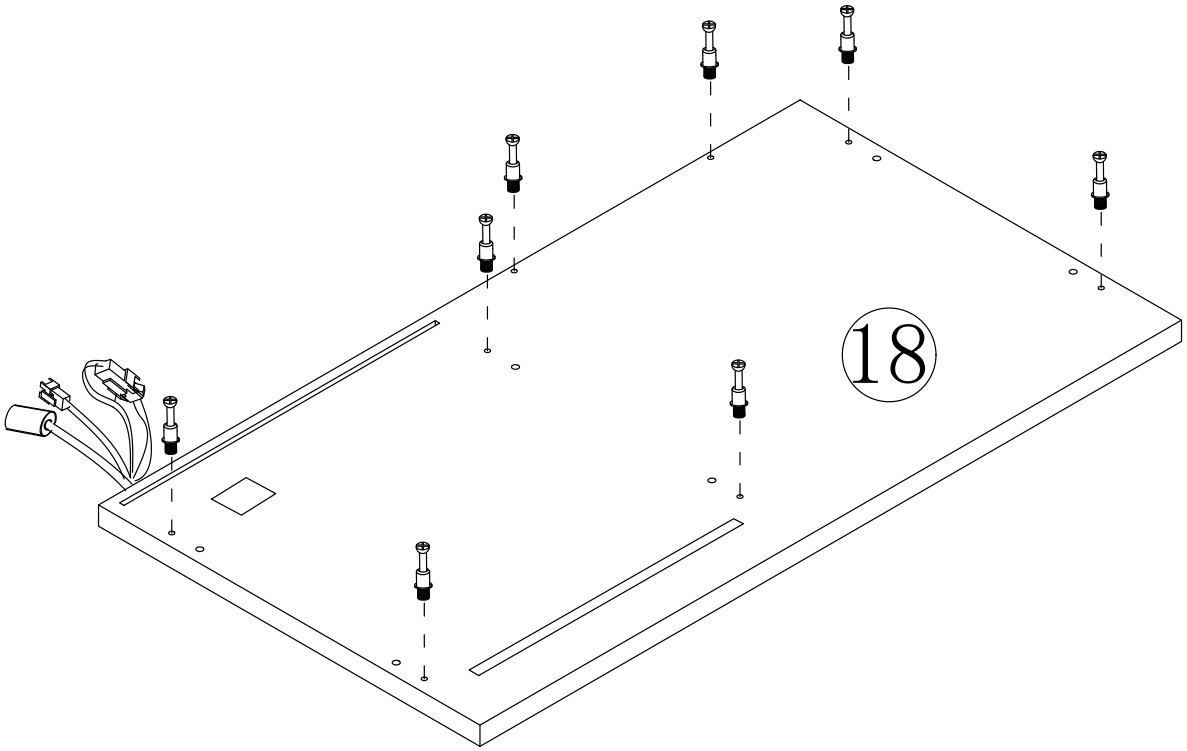


Step 33

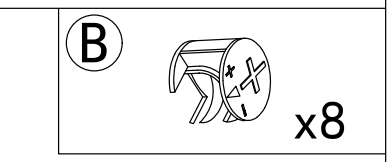


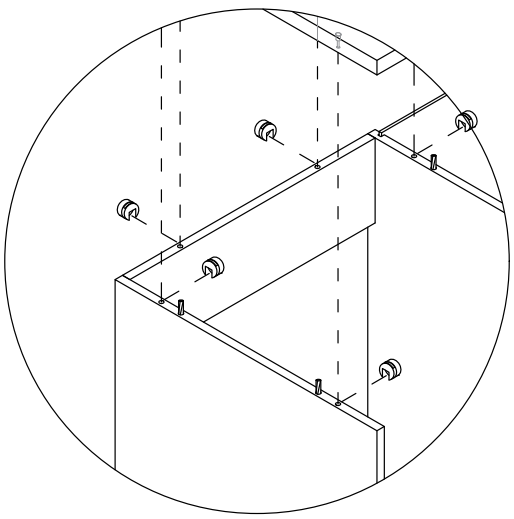

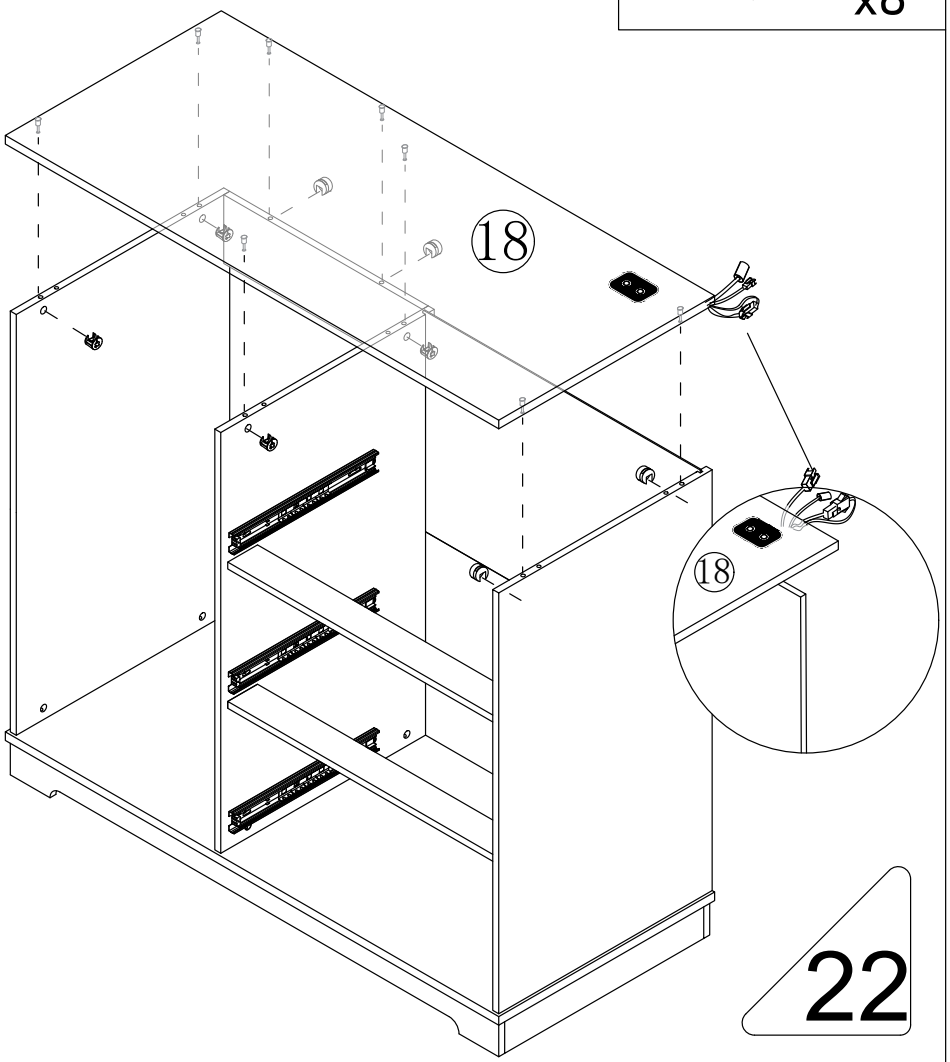


Step 34

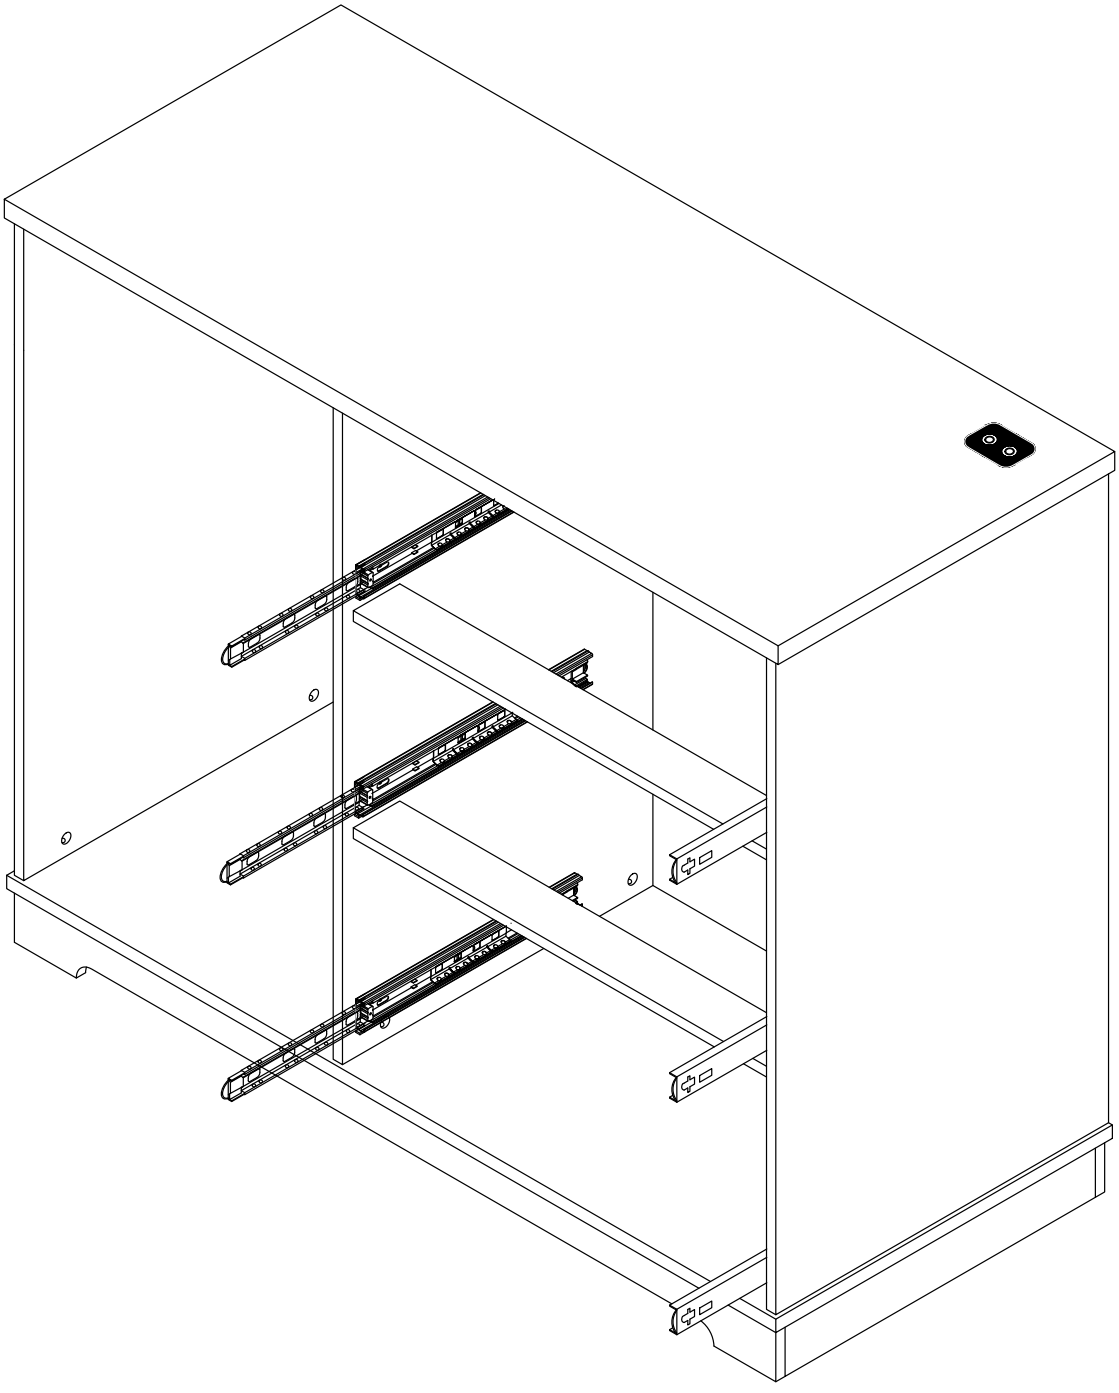




As shown，When installing the drawer,
pull the guide rail out first, Slide beads are also pulled out.

Step 35

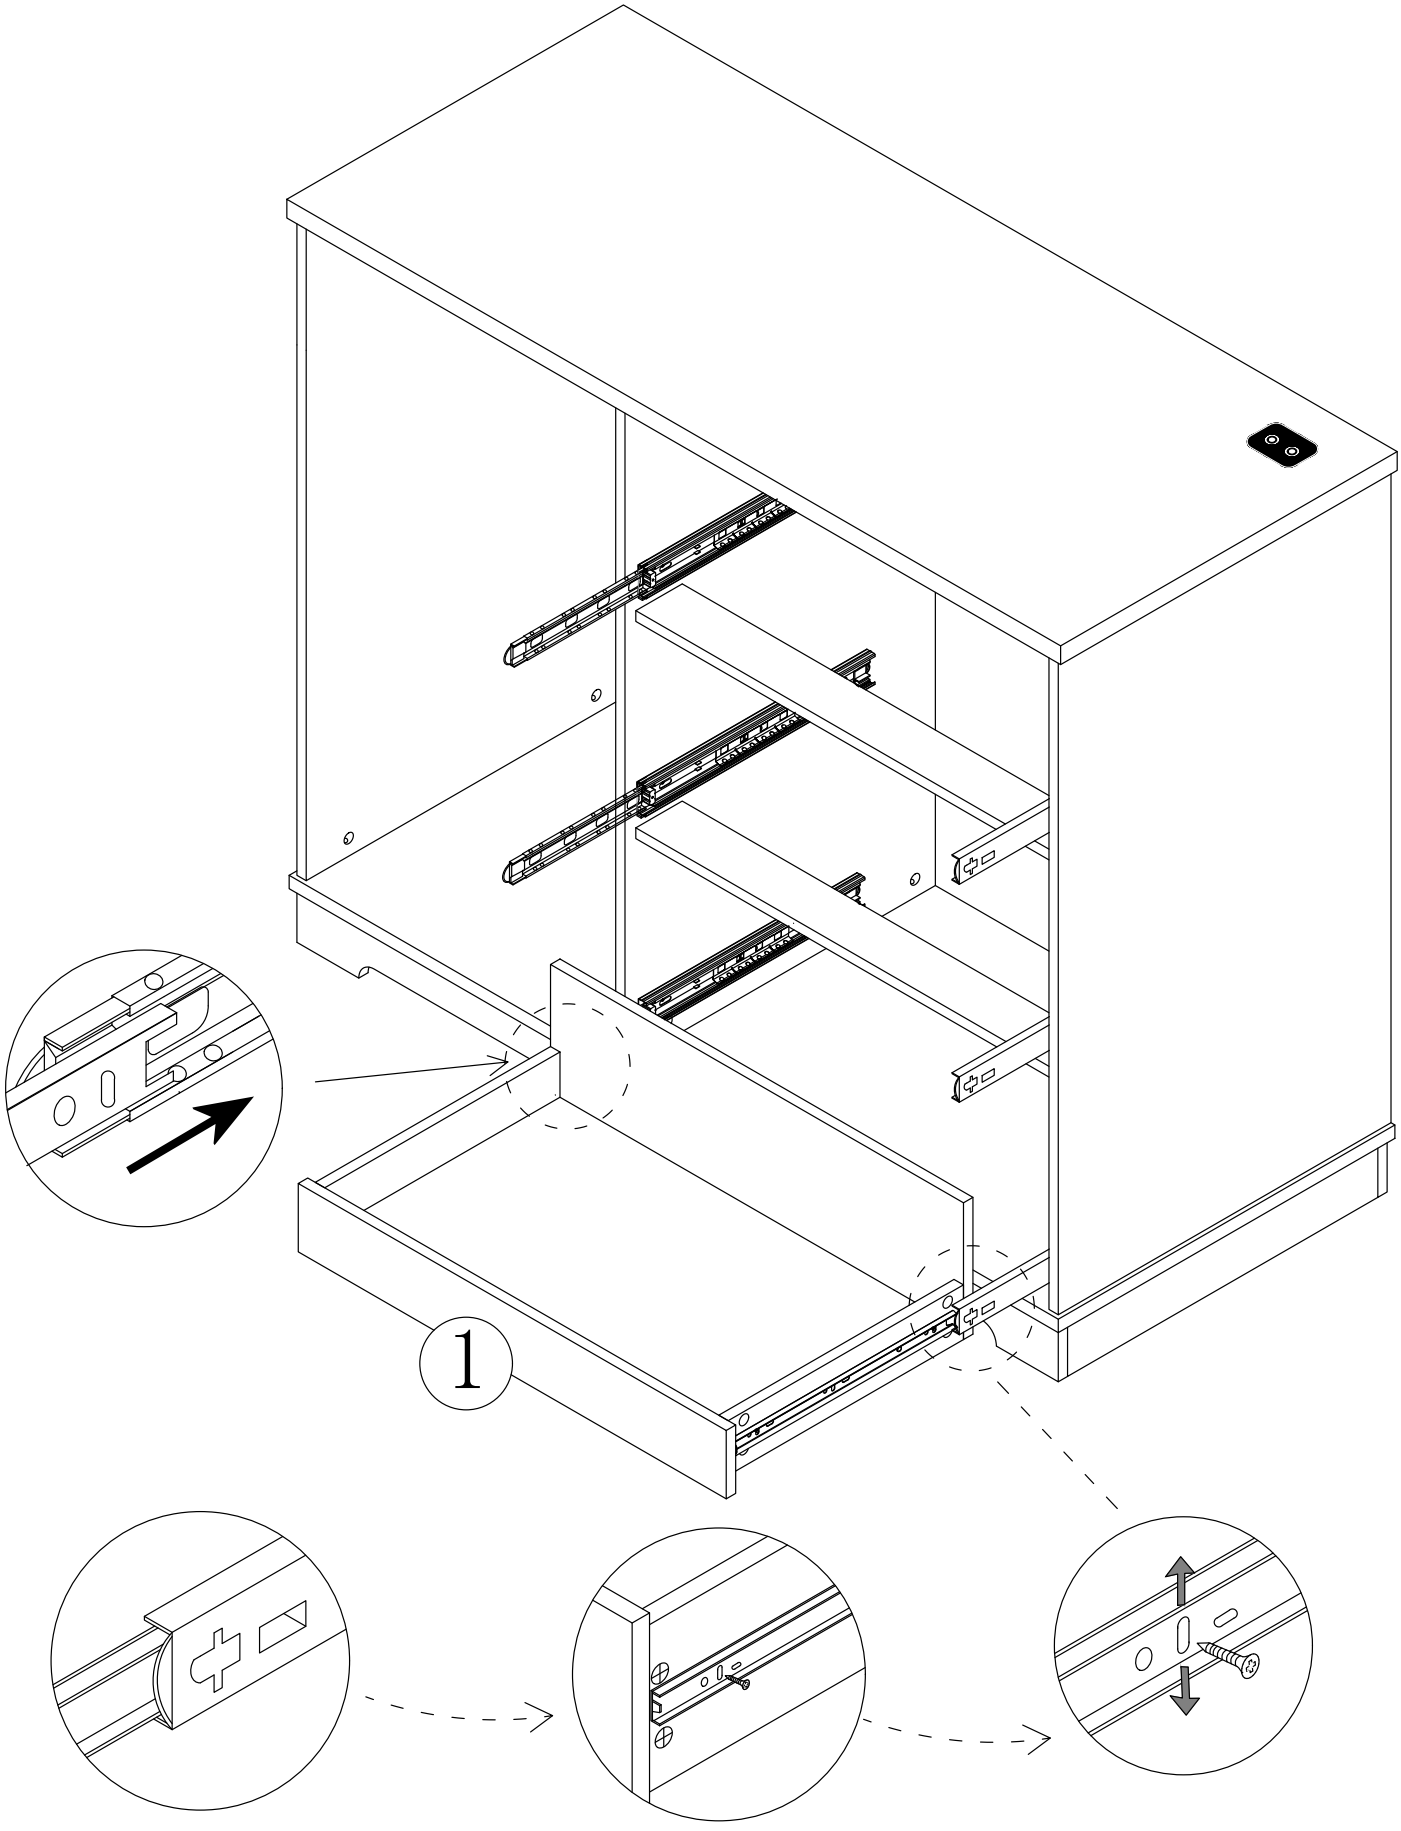

If a large gap is found after installing the drawer the slide rail can be moved up and down to adjust the gap


Step 36

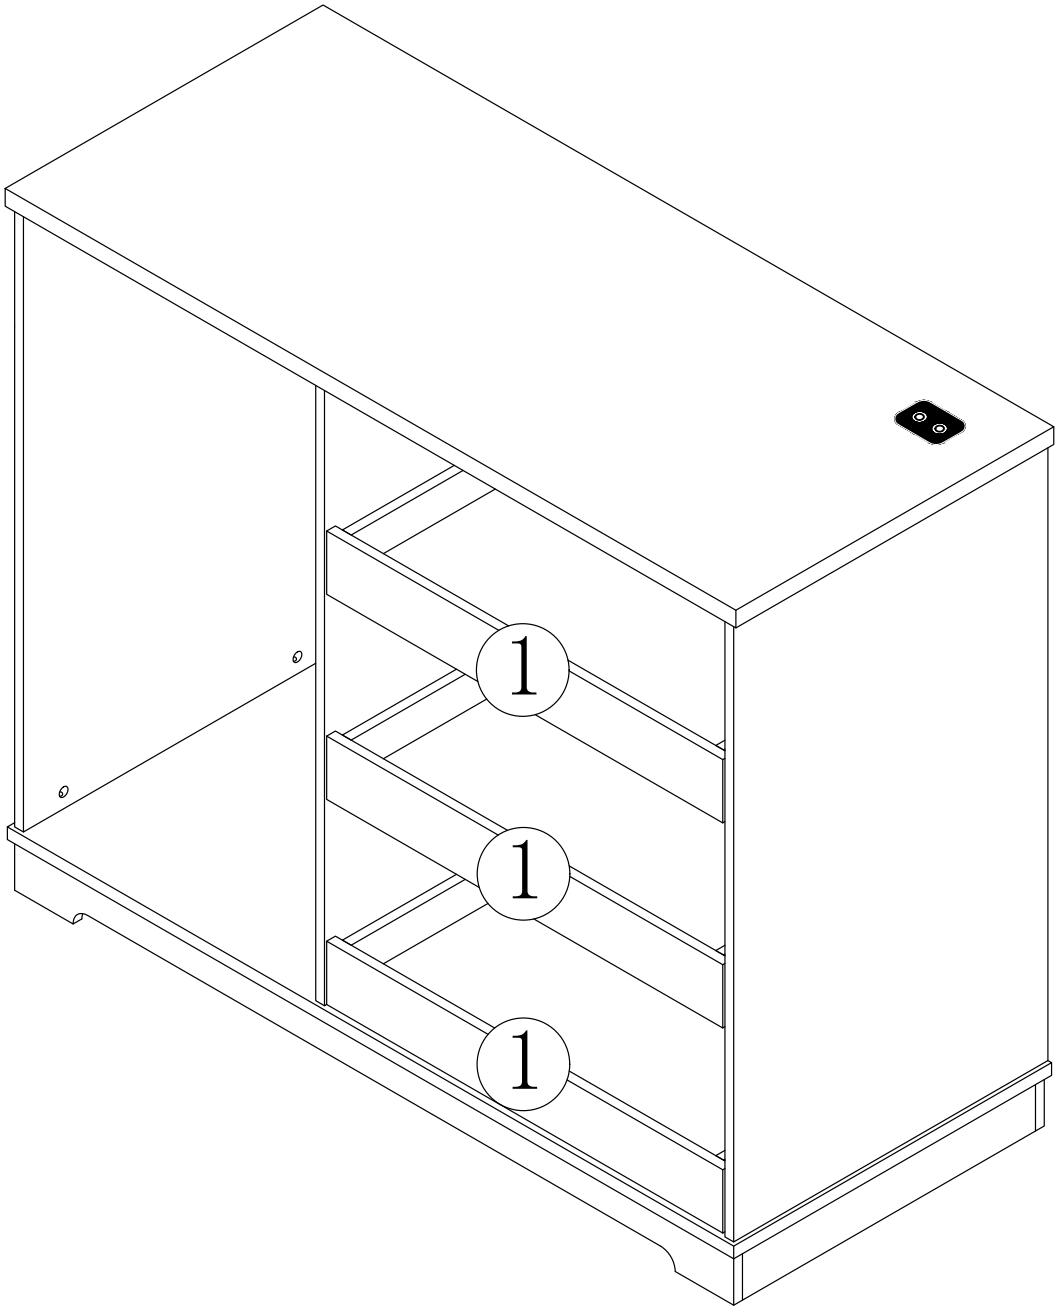

Step 37


F

x12

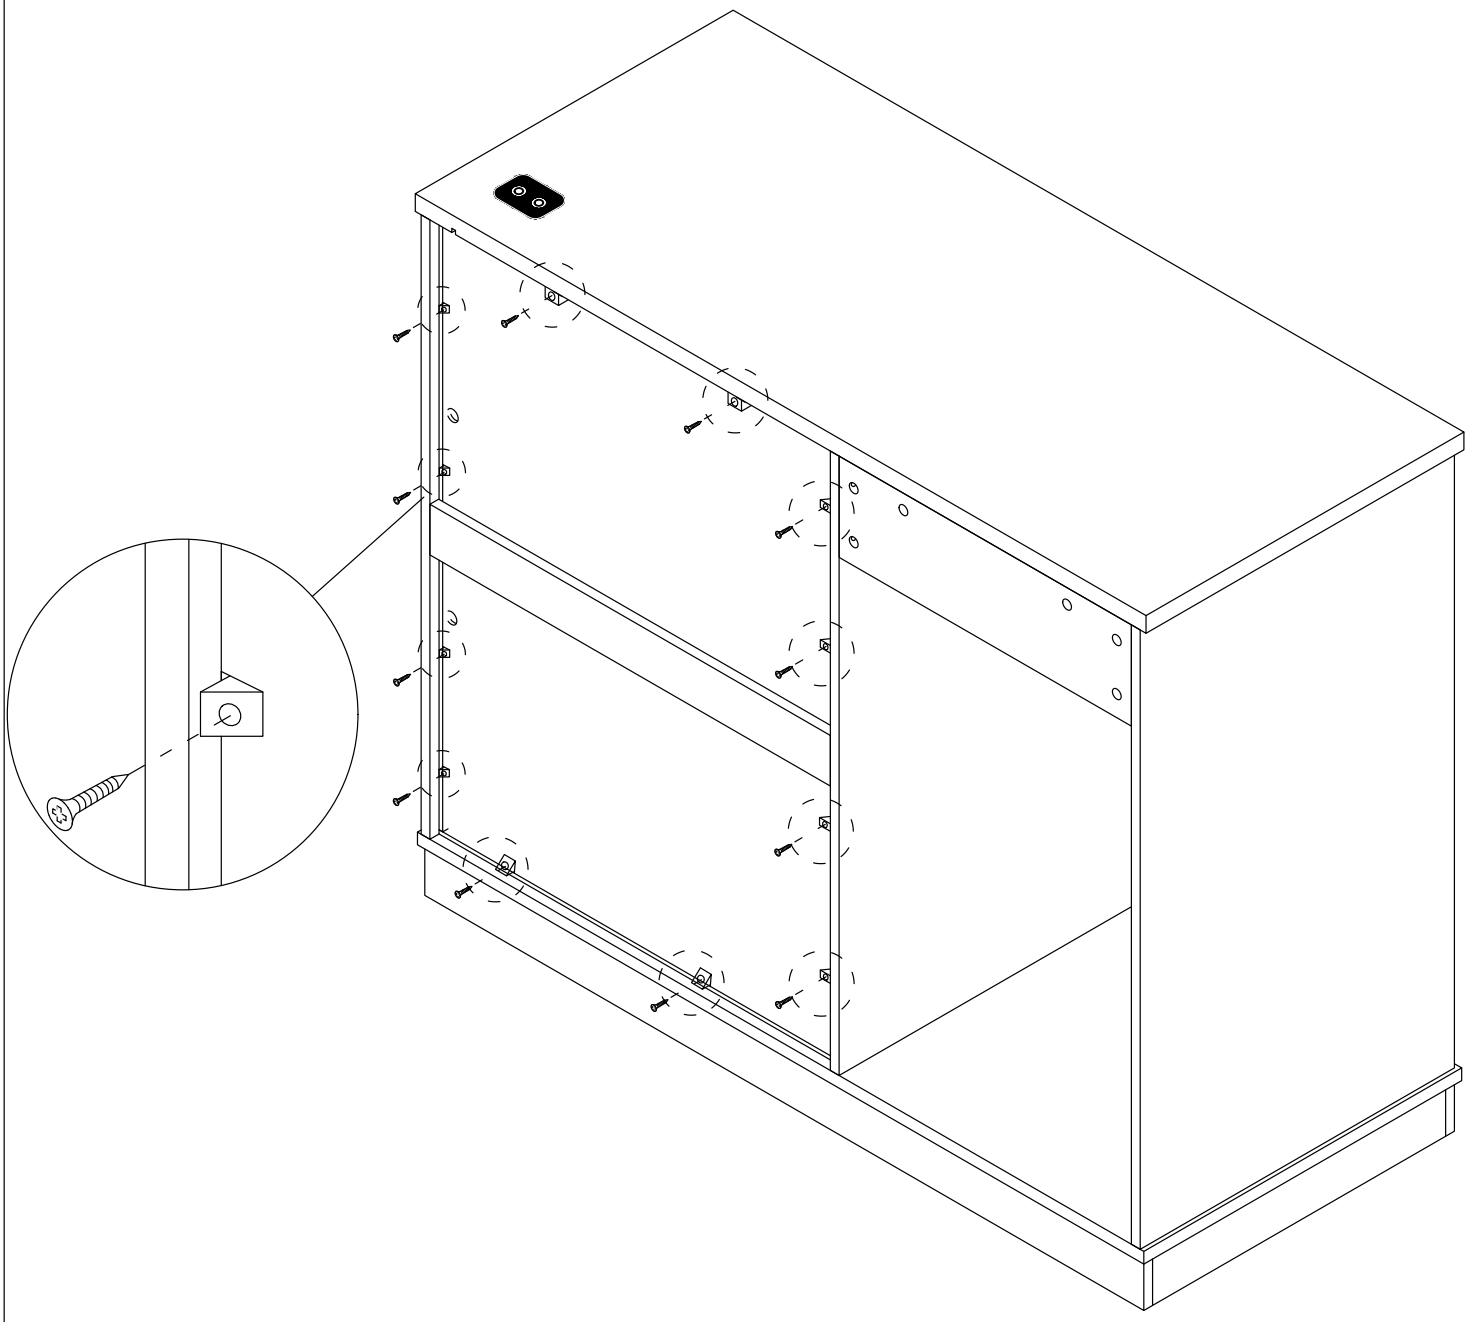


Step 38


H x1

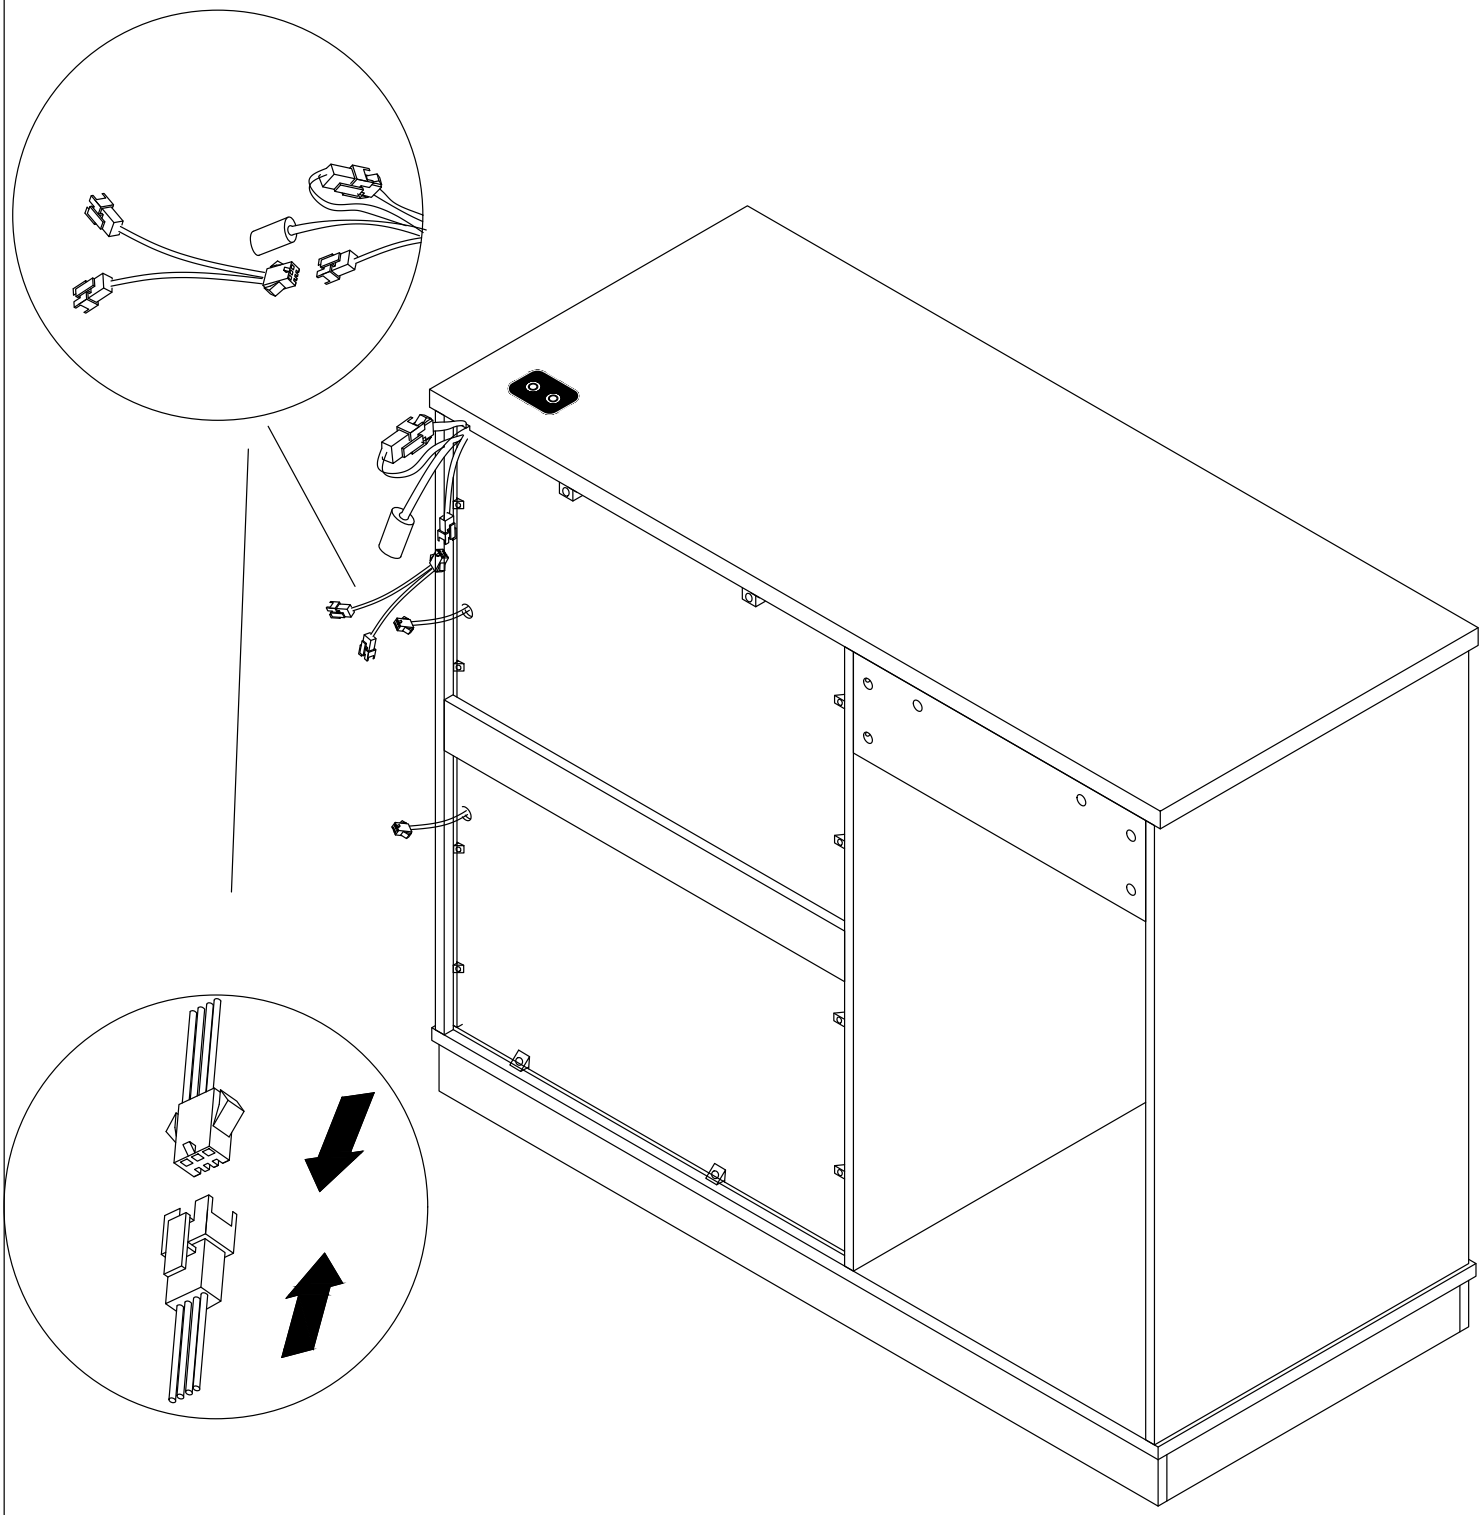


Step 39

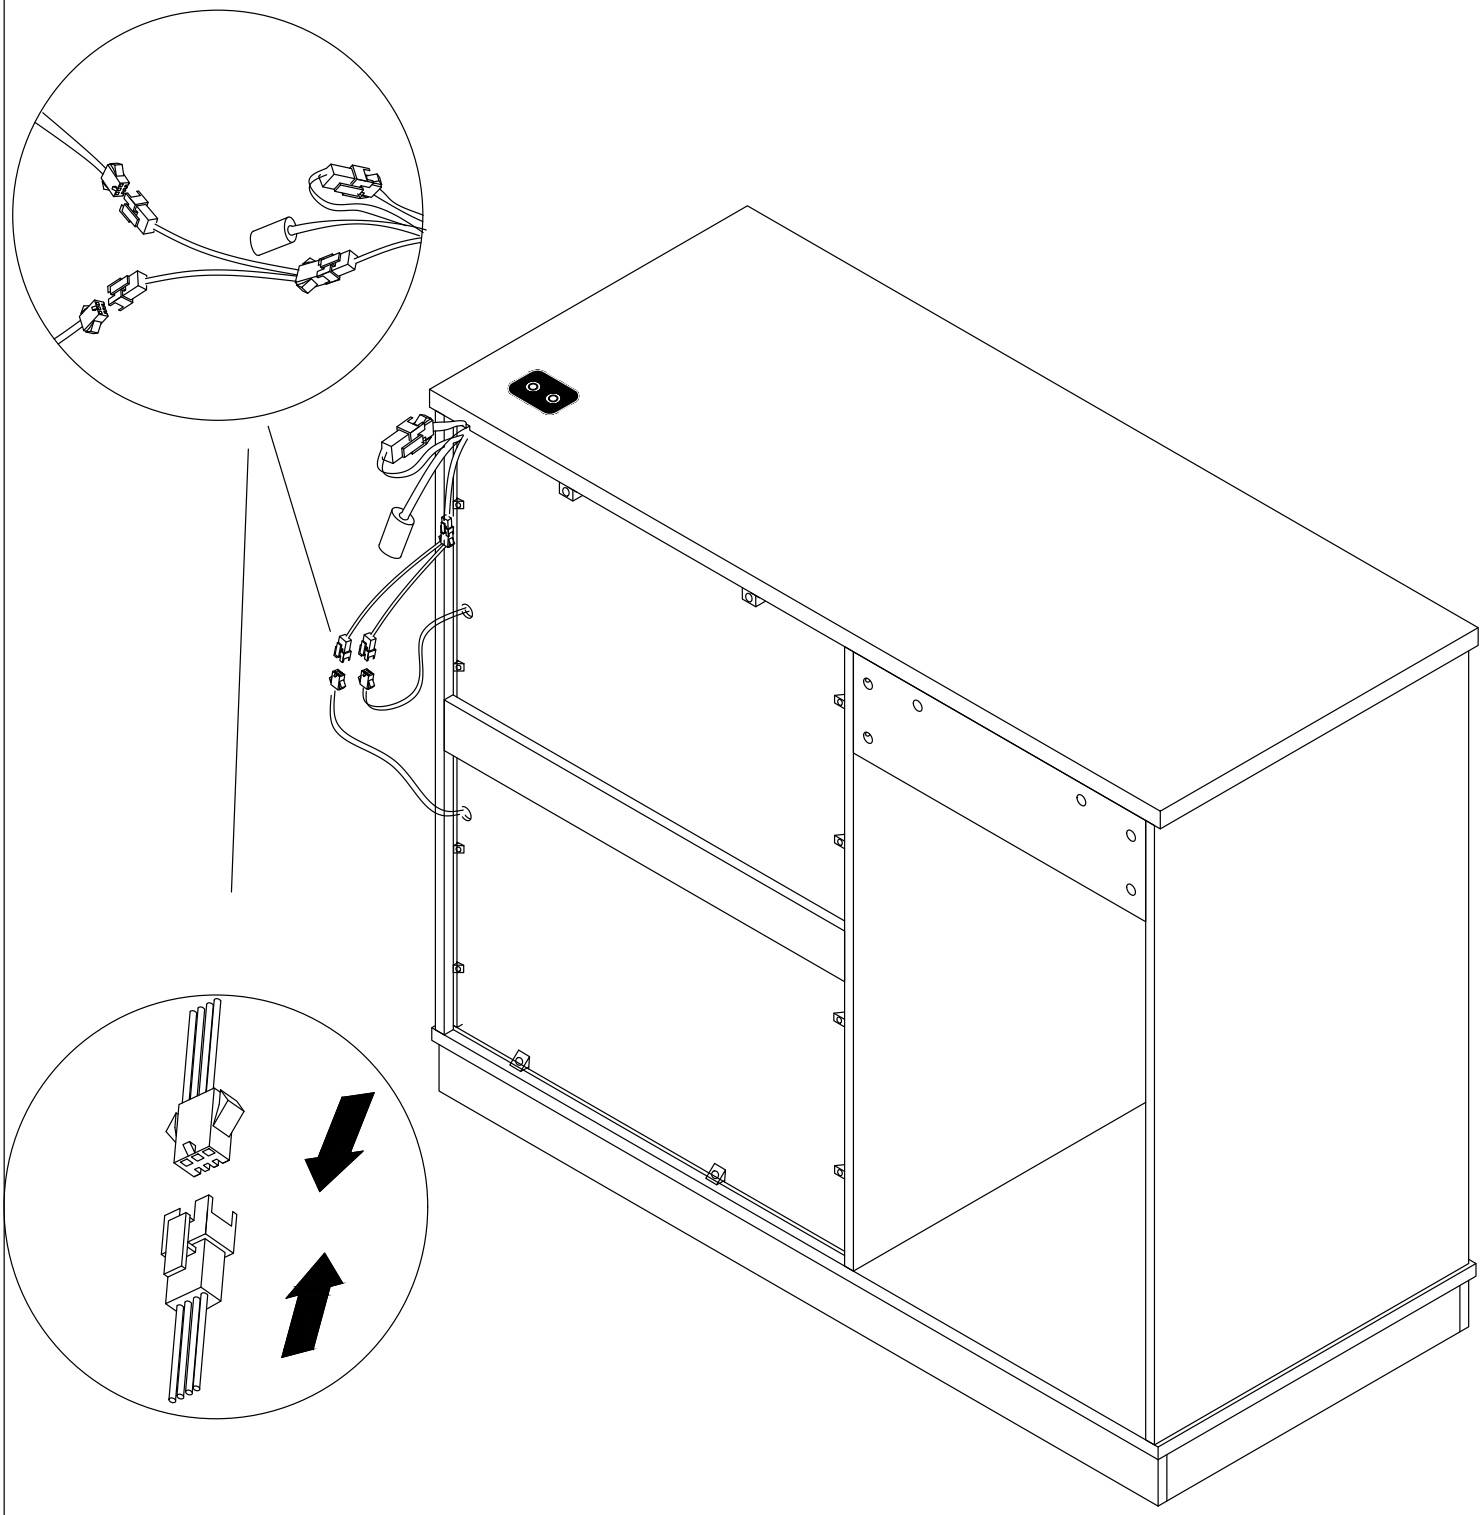


Step 40

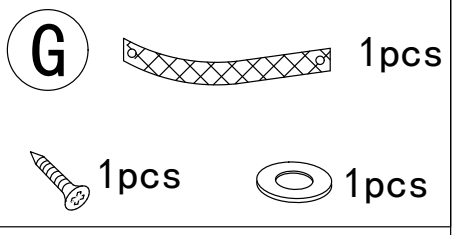


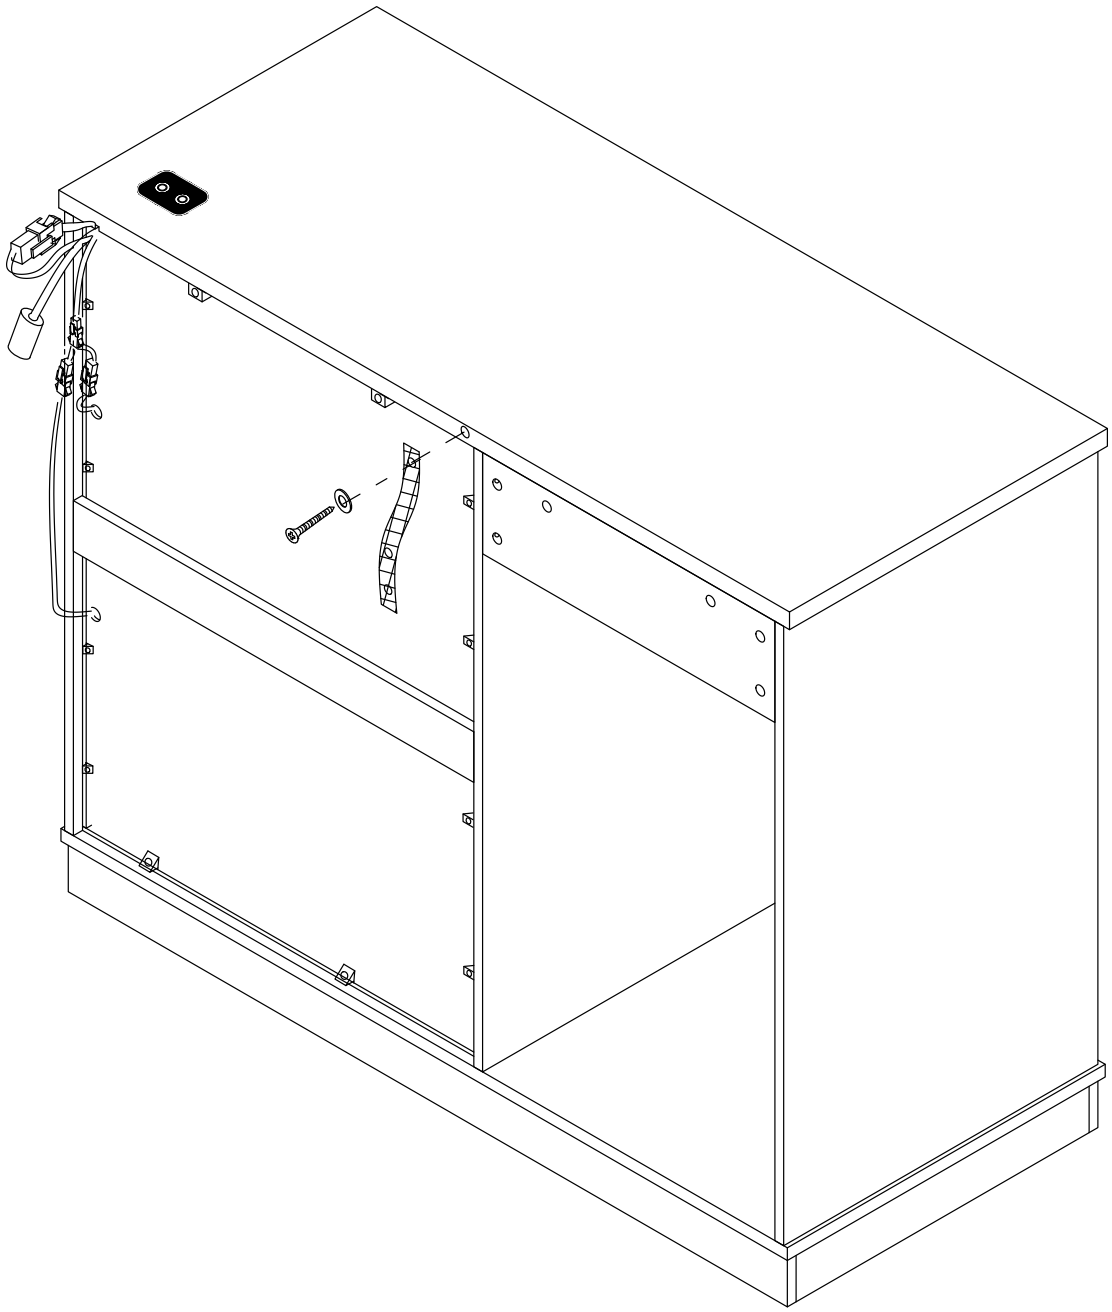

Step 41

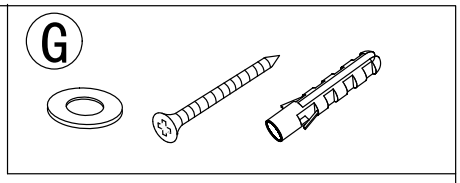


use a ruler to measure theapproximate height of the producton the wall, and then mark it witha pencil.

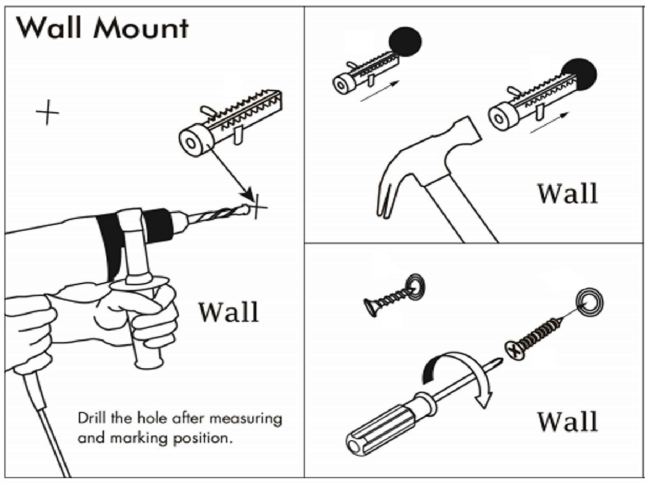


Put the expansion bolt into the hole.

Pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.


Use a tape drill to make holesin the wall that are suitable for theproduct screws.

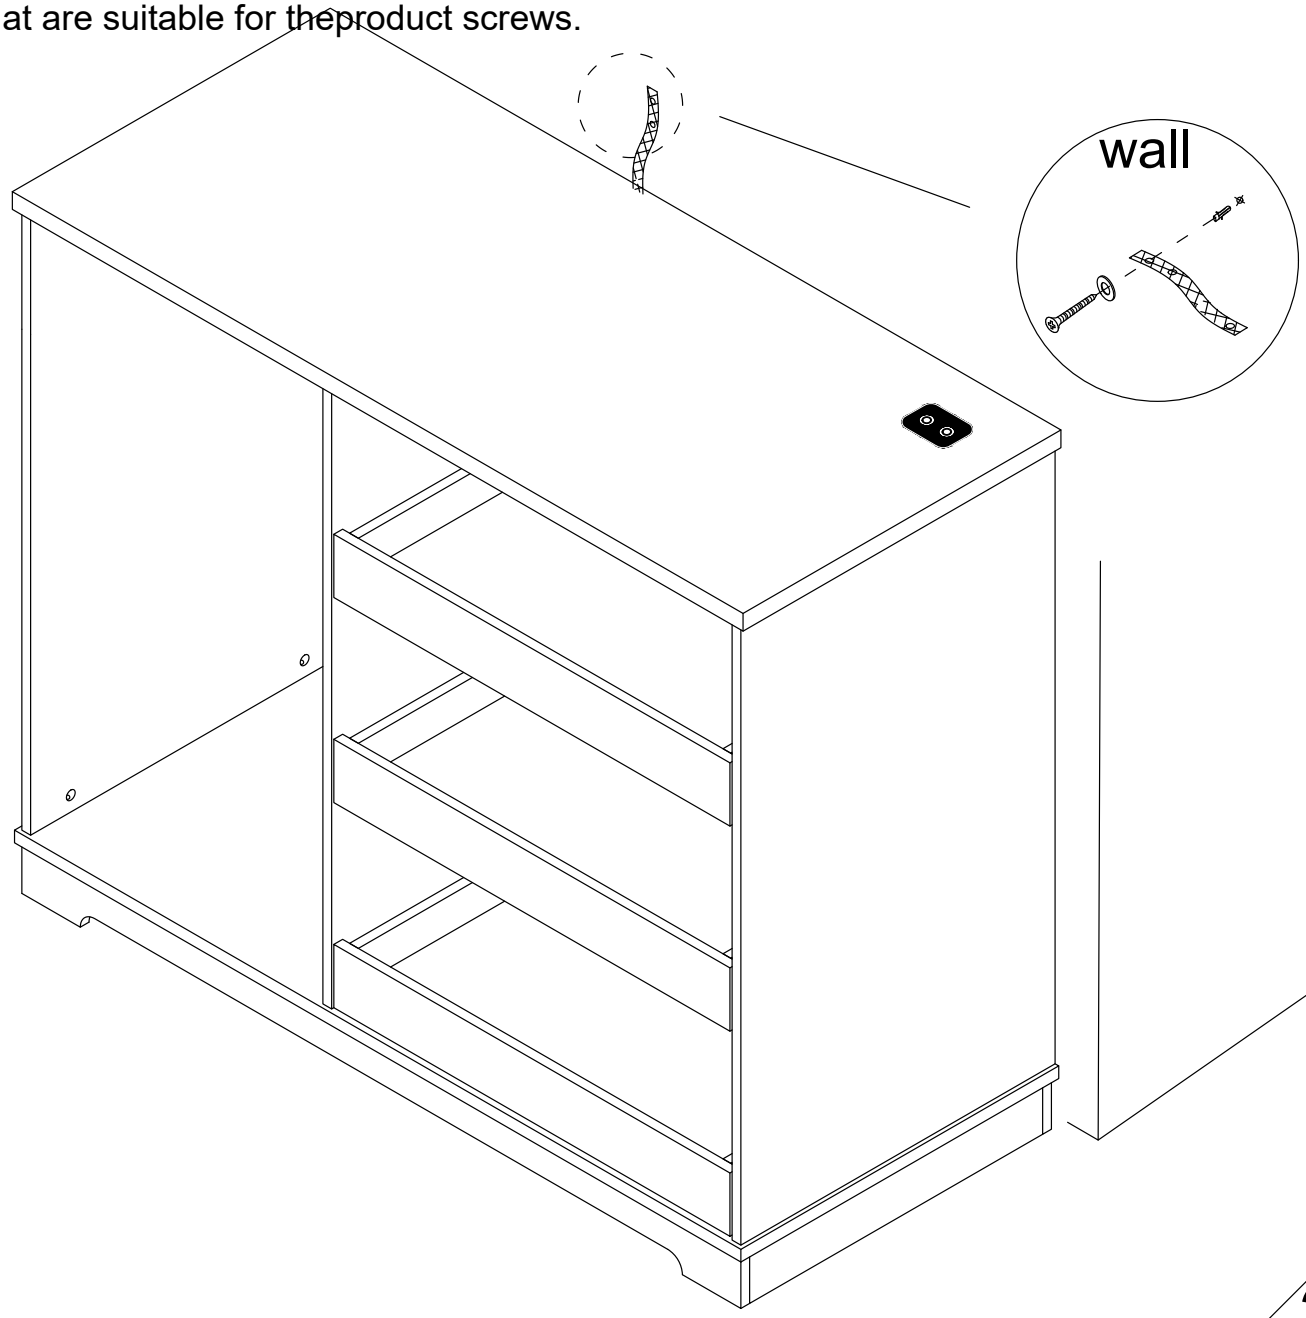

Step 42



x1

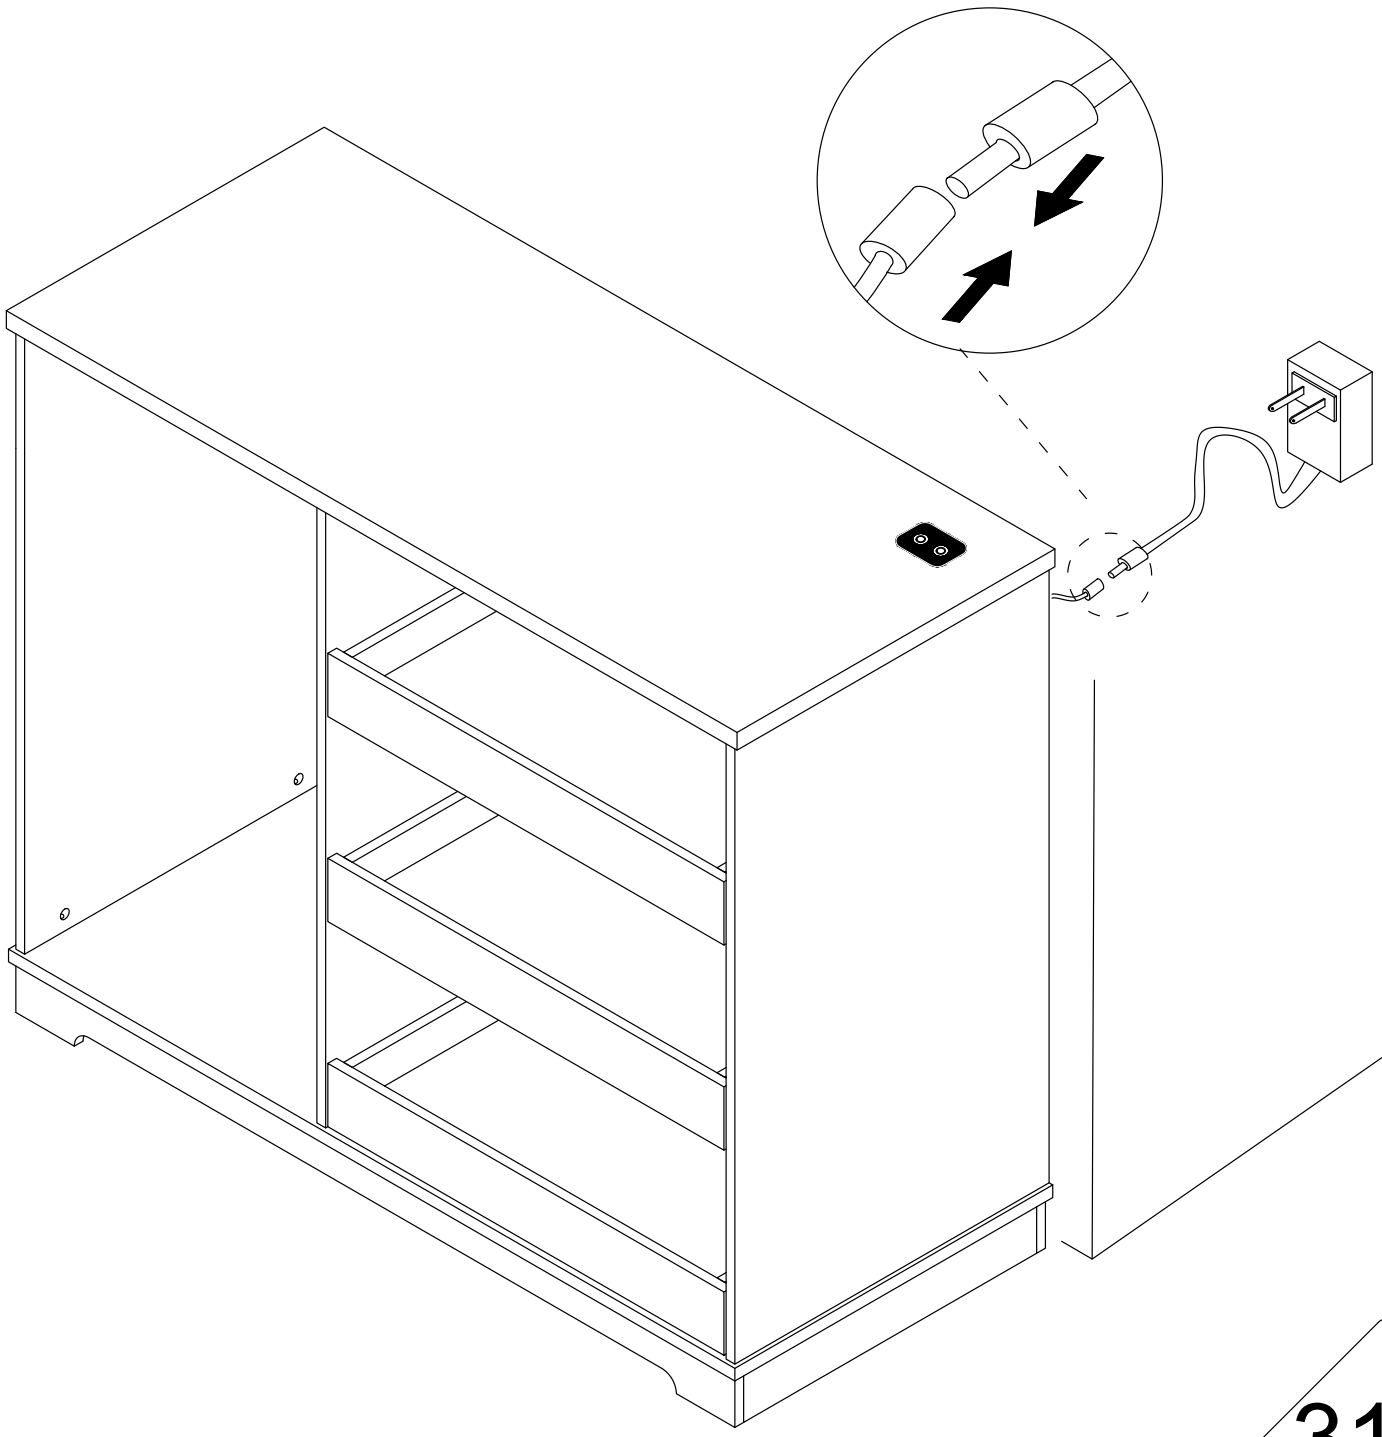


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

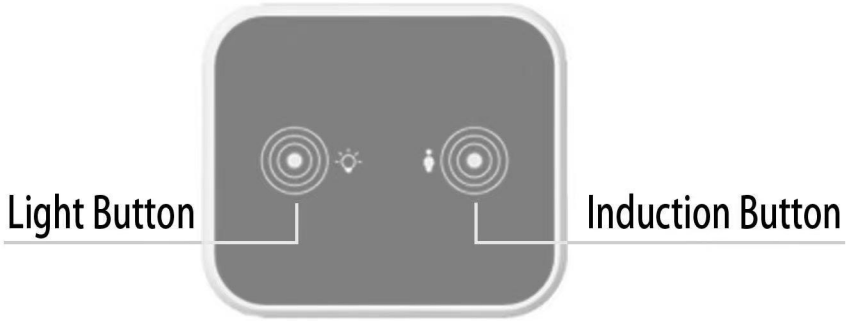

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.