

artos[®]

F502-7

opera 3-hole wall
mount tub filler

INSTALLATION GUIDE

BRUSHED NICKEL (BN)



CHROME (CH)



BLACK (BK)



SATIN BRASS (SB)



artos[®]

F502-7

opera 3-hole wall
mount tub filler

OPERATING SPECIFICATIONS

for associated valves | F906A-V0

OPERATING PRESSURE

Minimum: 15 psi

Maximum: 125 psi

FLOW CAPACITY

5.6USGPM@60 psi (each valve)

TOTAL= 11.2USGPM

INLET/OUTLET

1/2" Female NPT

STANDARDS

ASSE 1016.ASME A112.18.1/CSA B123.1 Certified

CODES

CUPC Approved




artos[®]

F502-7

opera 3-hole wall
mount tub filler



PRODUCT DIMENSIONS

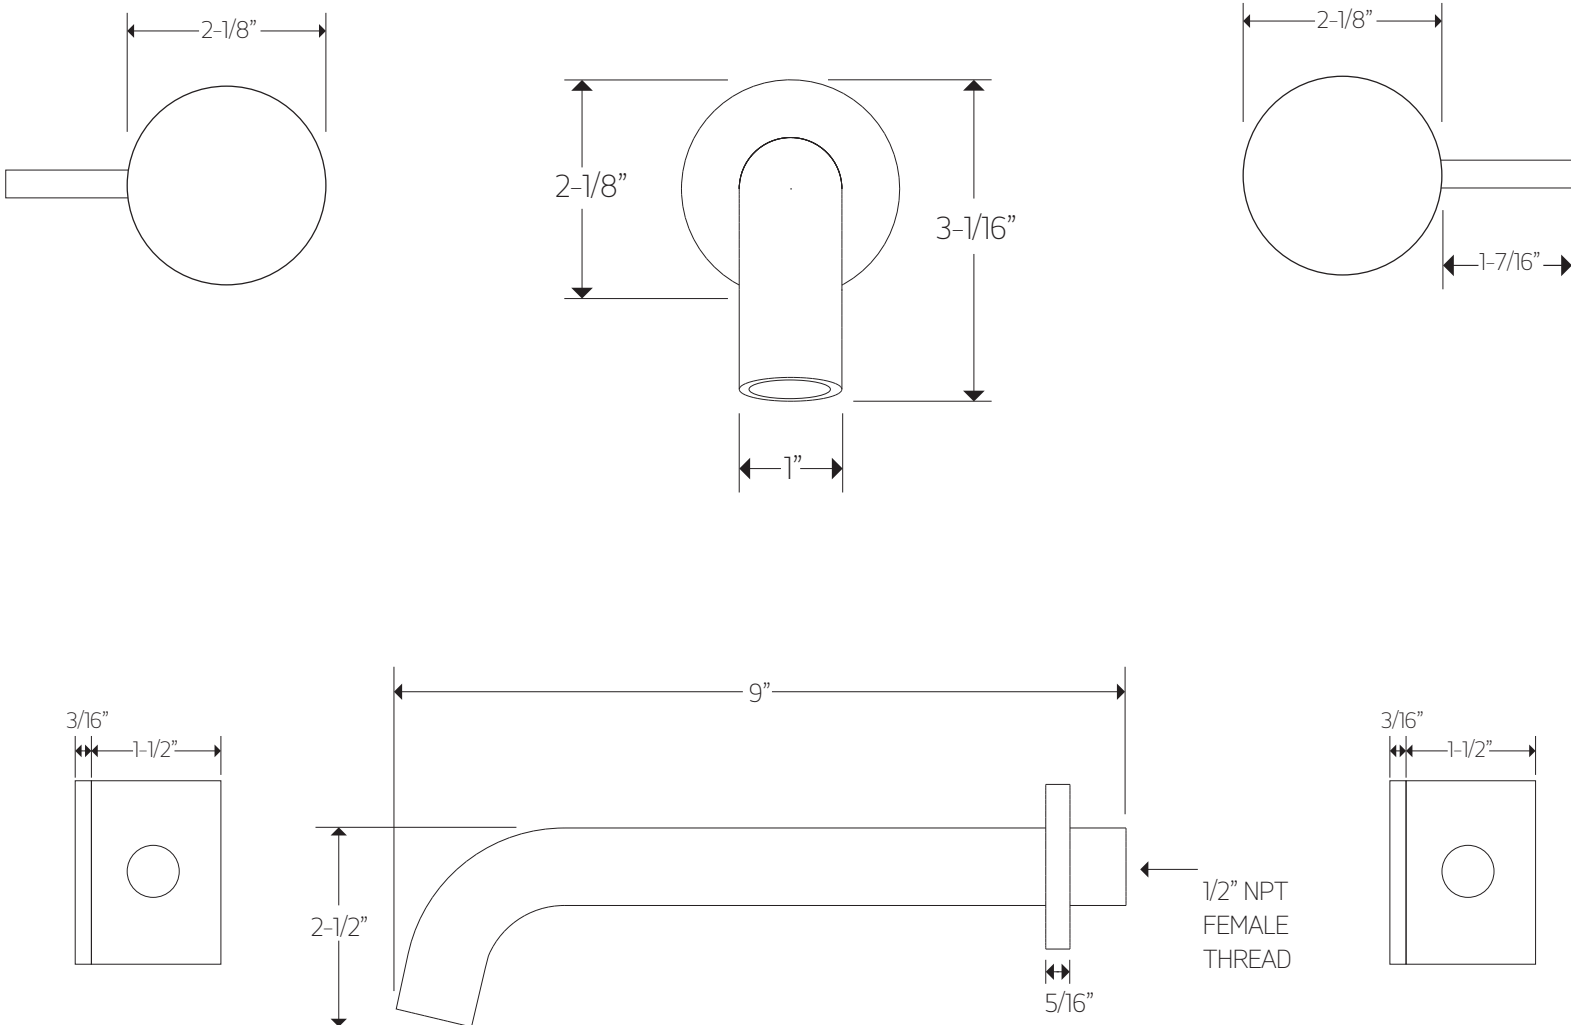

F502-7


opera 3-hole wall
mount tub filler

STEP 1

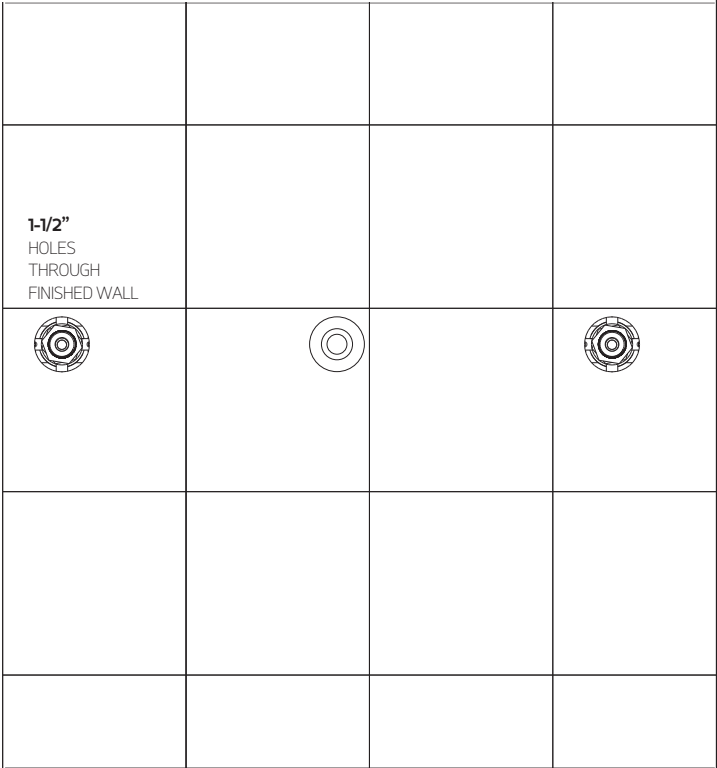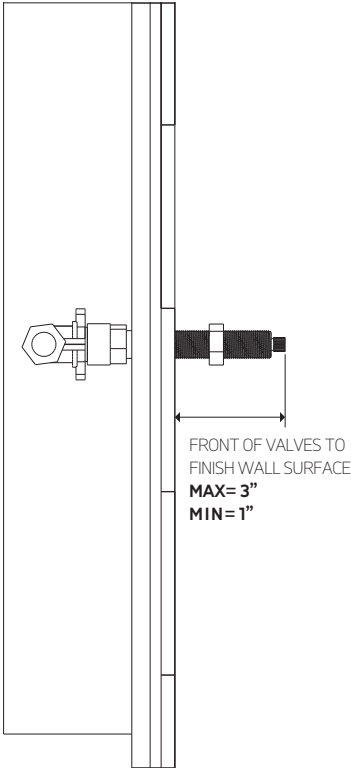

INSTALLATION STEPS

STEP 2 IMPORTANT: IF USING HEAT NEAR THE VALVE BODY PLEASE REMOVE CARTRIDGE.

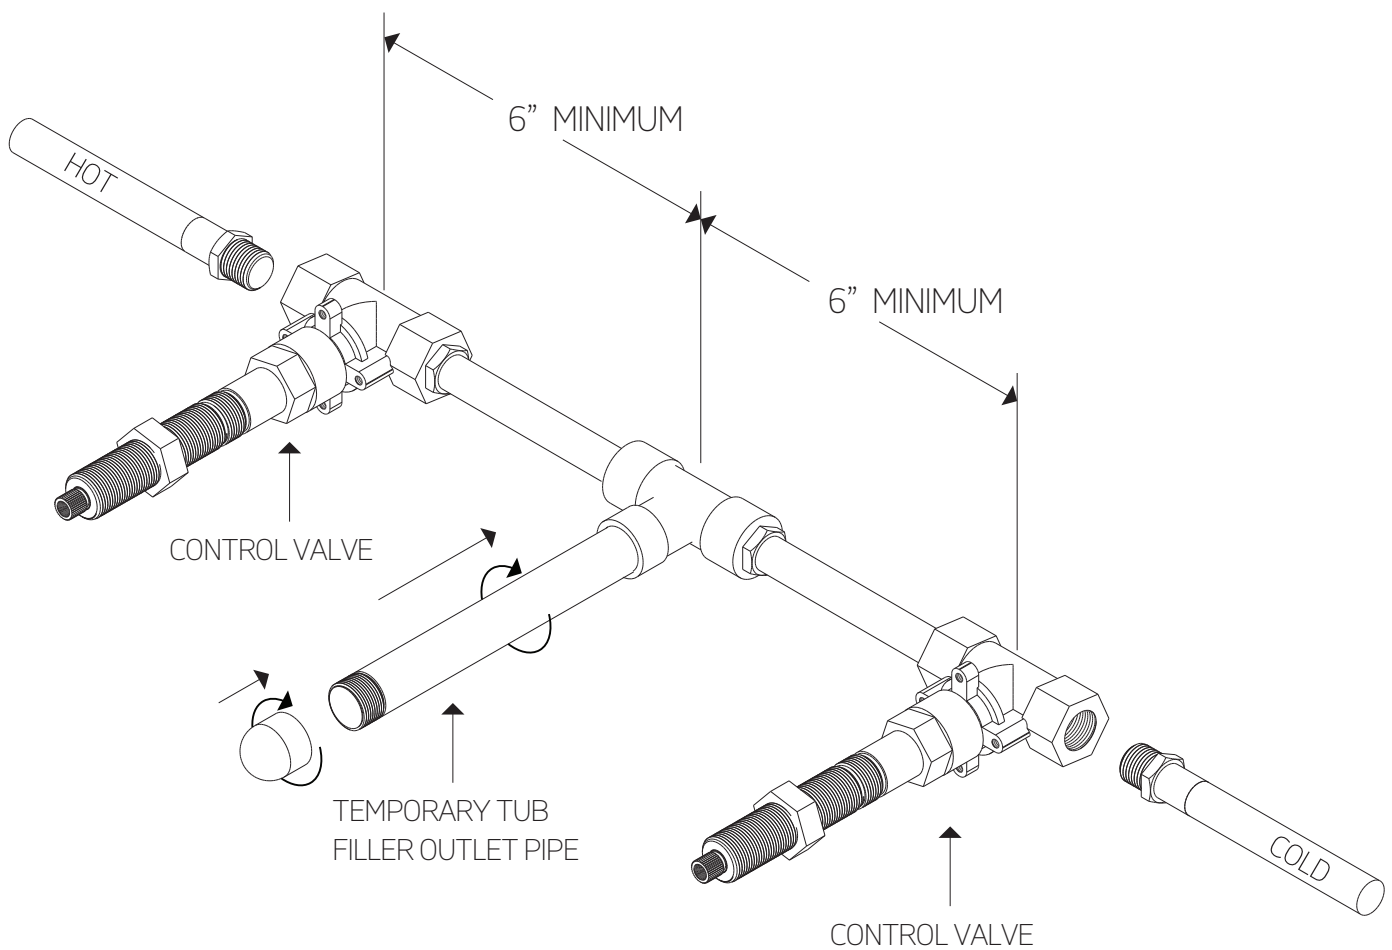


artos[®]


F502-7

opera 3-hole wall
mount tub filler

STEP 3

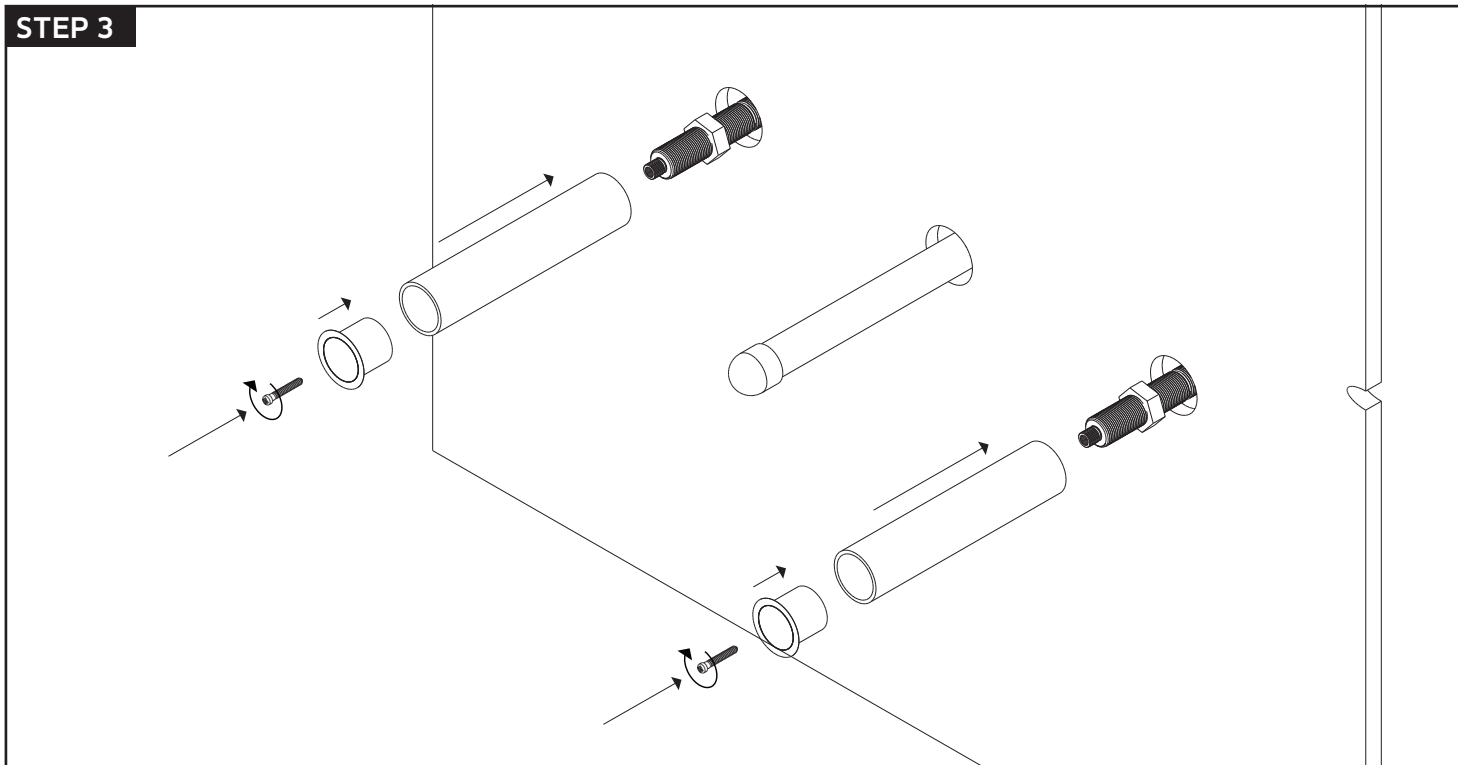


STEP 4

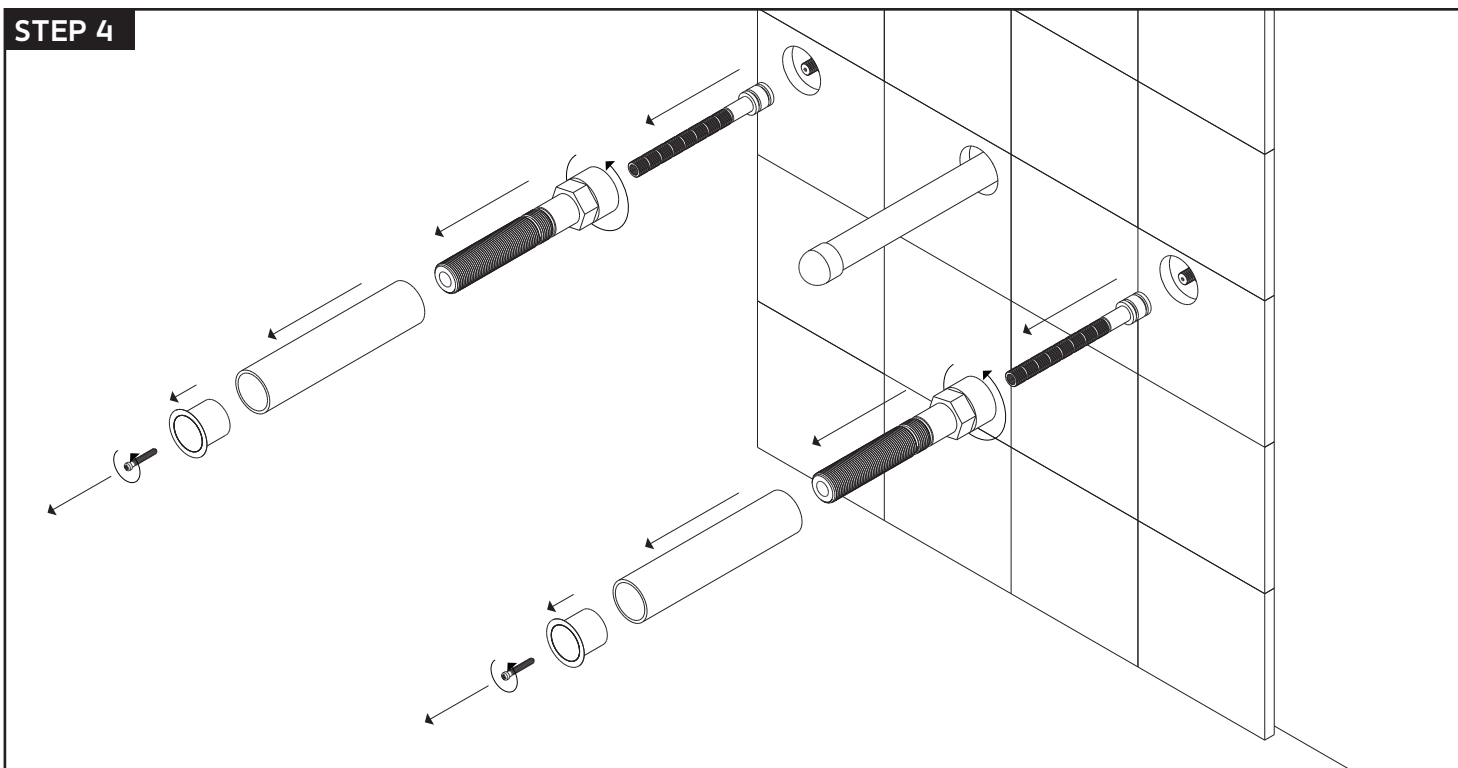


INSTALLATION STEPS

STEP 5 REFIT OUTER SPINDLES ONLY.

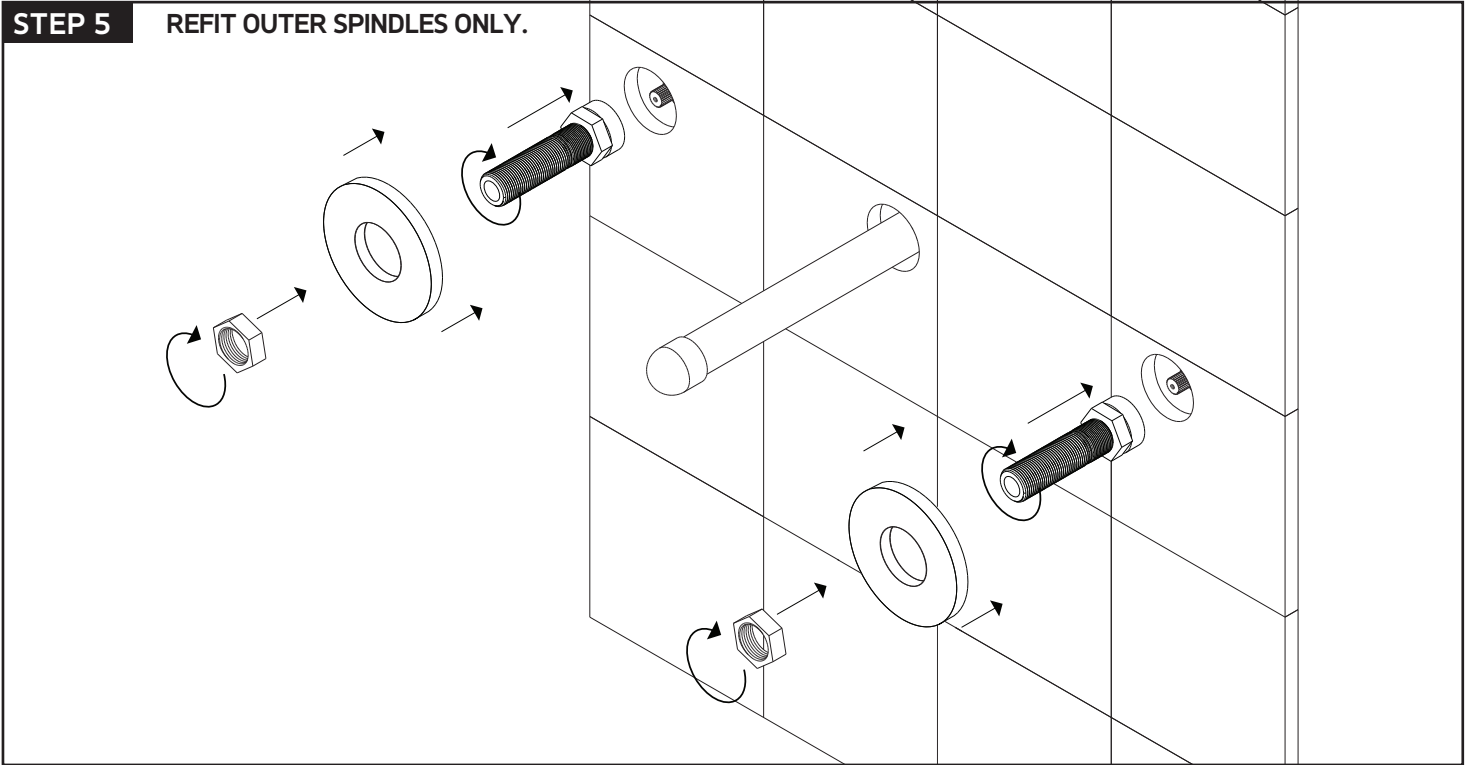

STEP 6

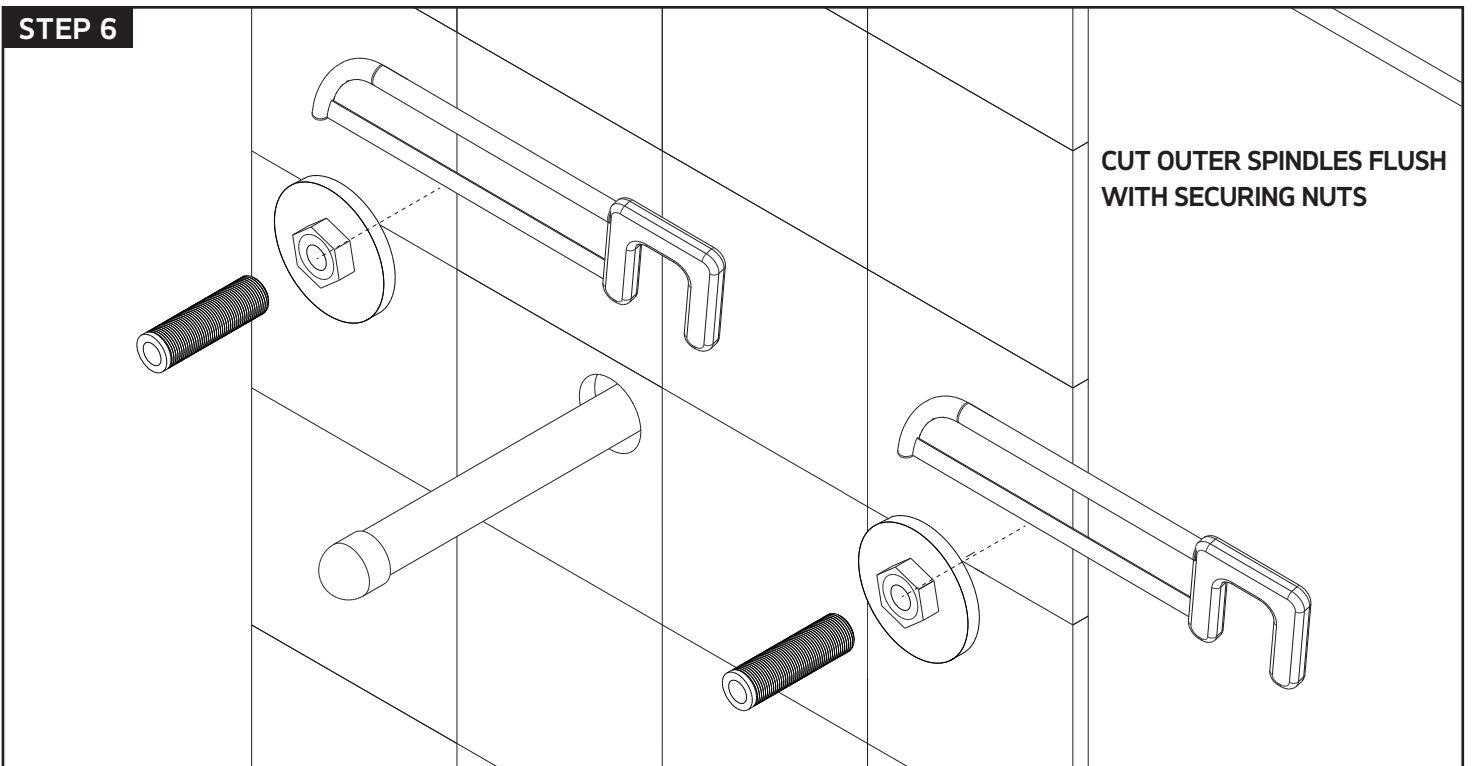


artos[®]


F502-7

opera 3-hole wall
mount tub filler

STEP 7

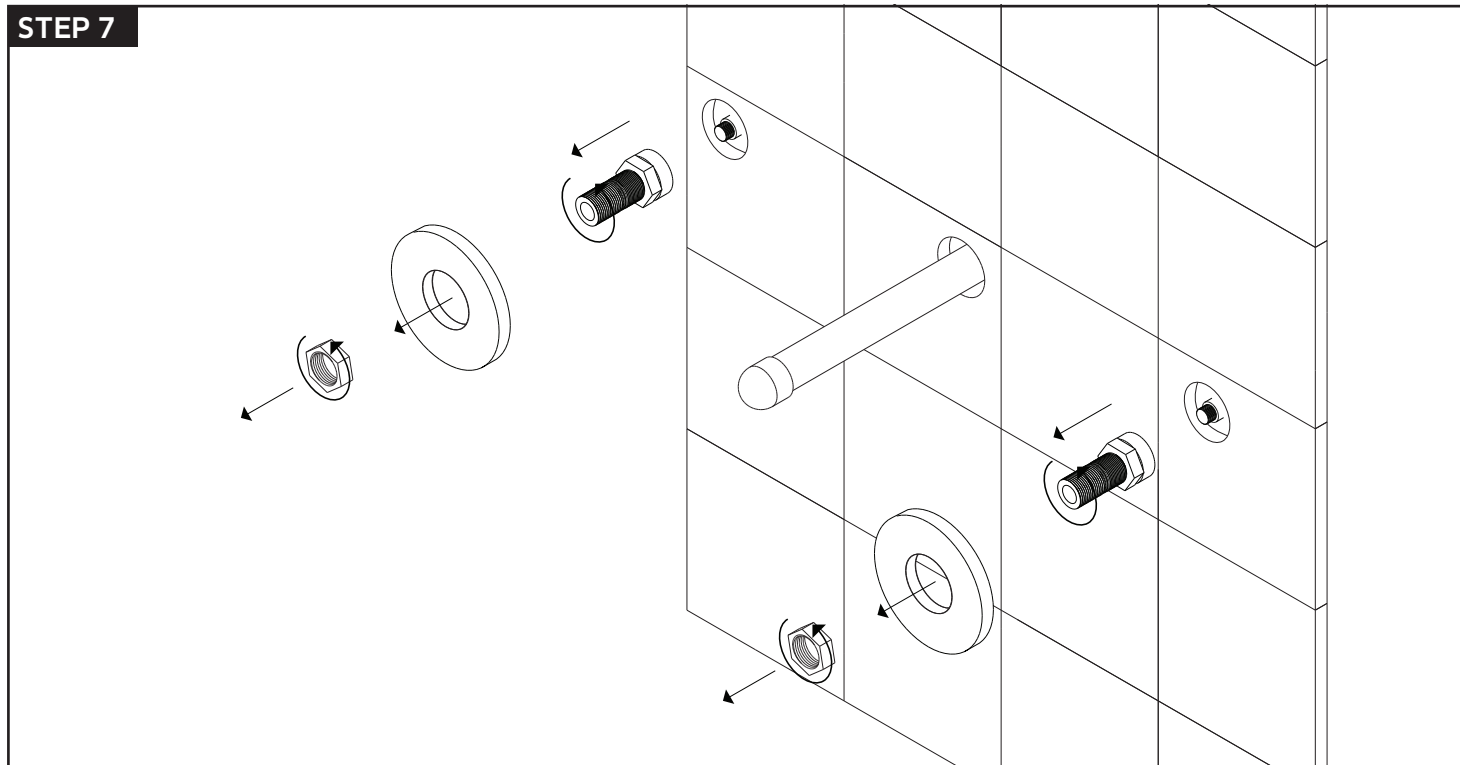


STEP 8

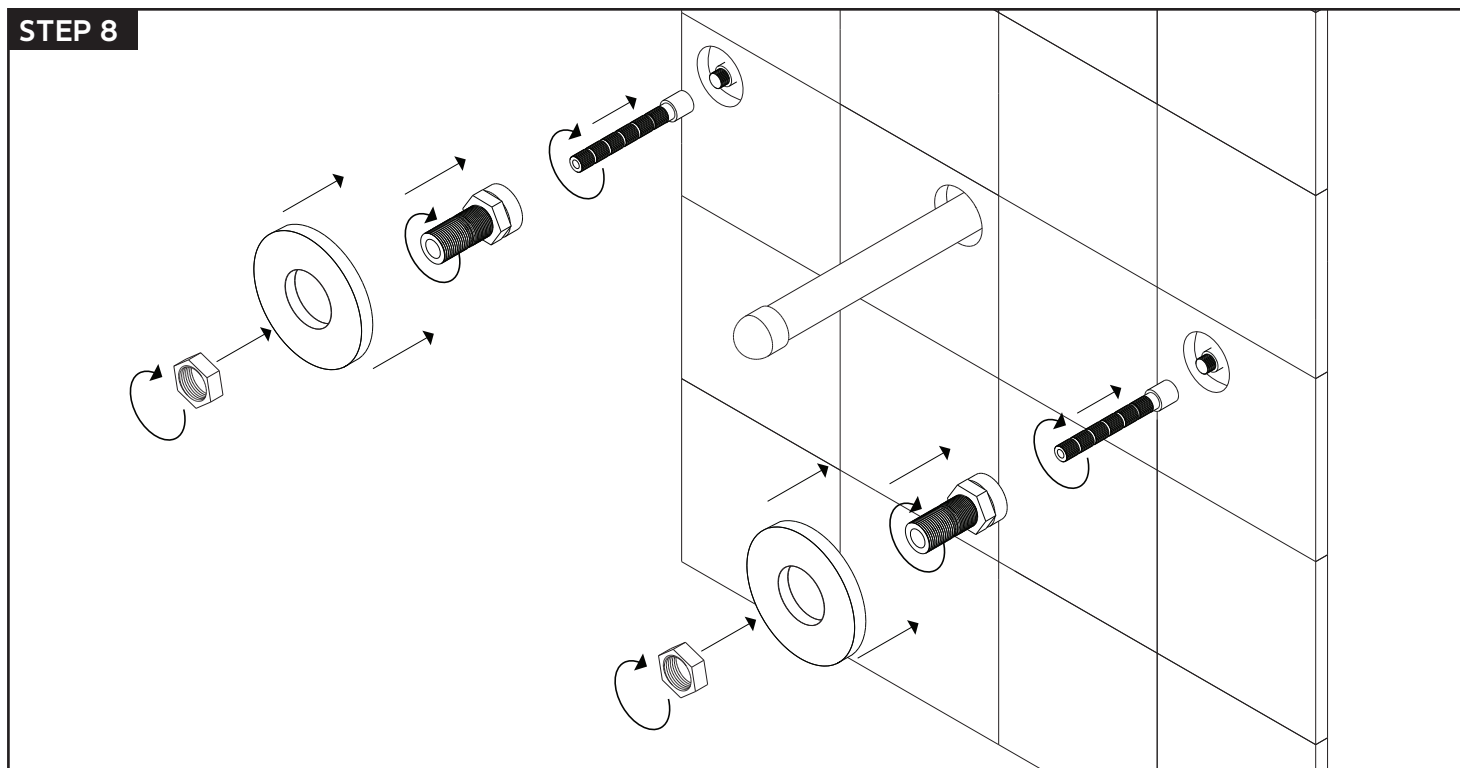


INSTALLATION STEPS

STEP 9

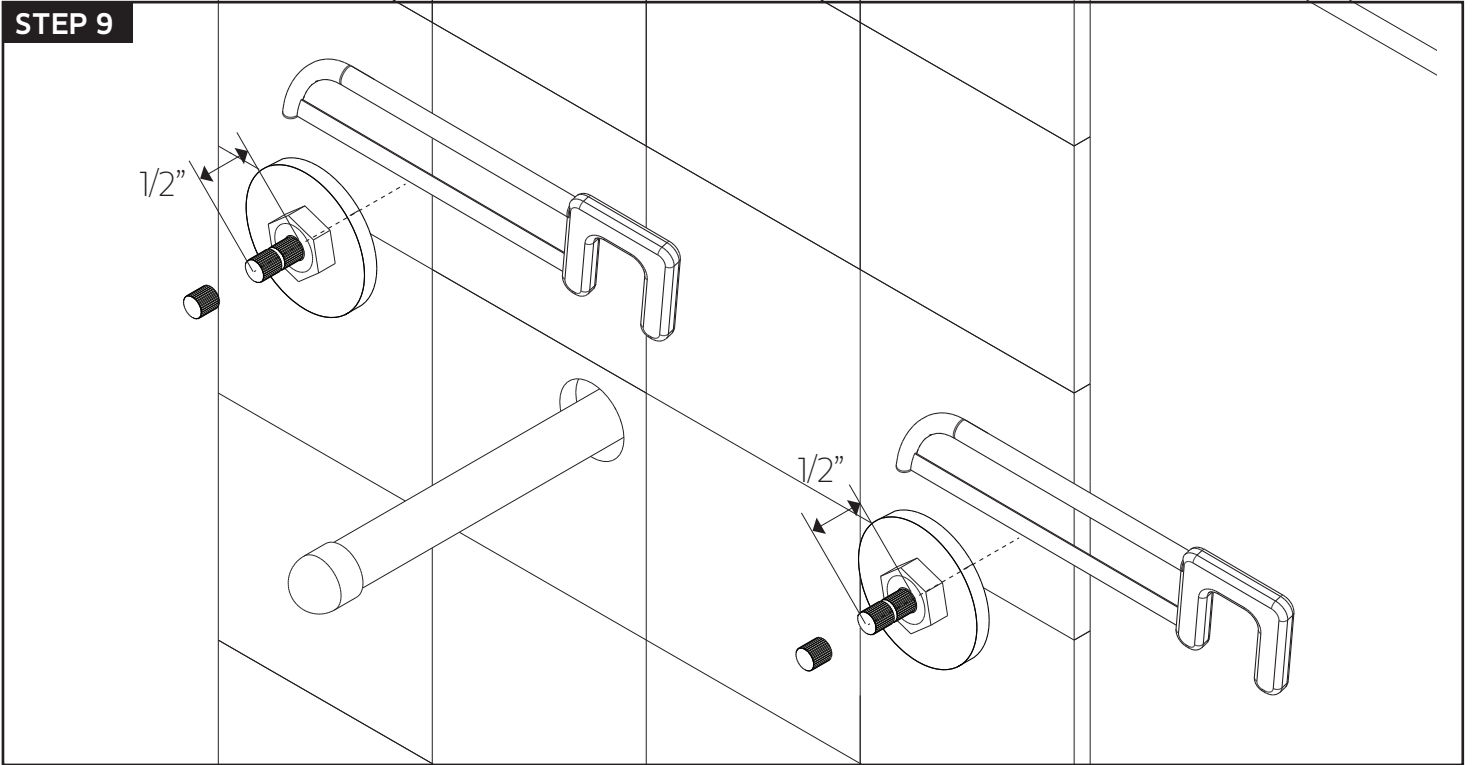

STEP 10

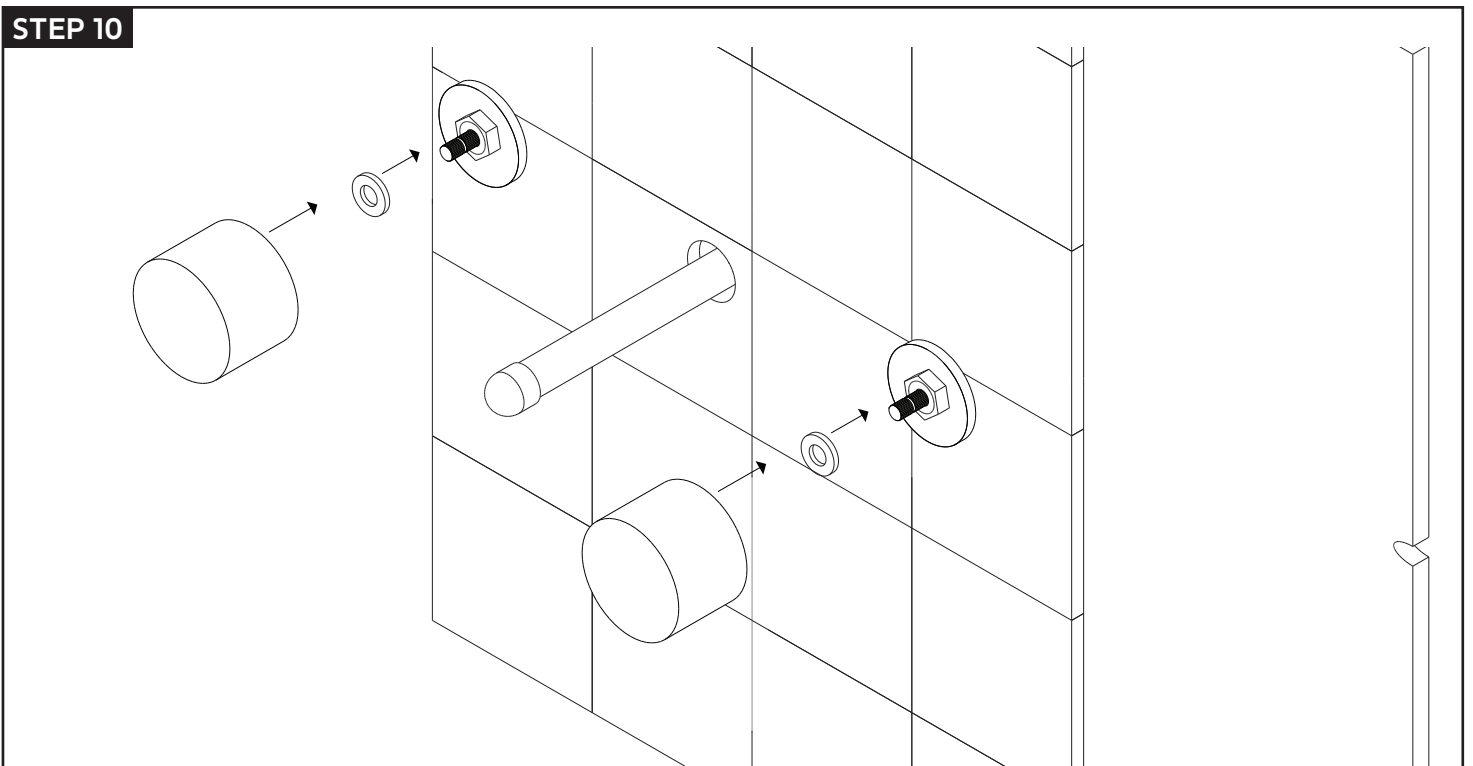


artos[®]

F502-7


opera 3-hole wall
mount tub filler

INSTALLATION STEPS

STEP 11

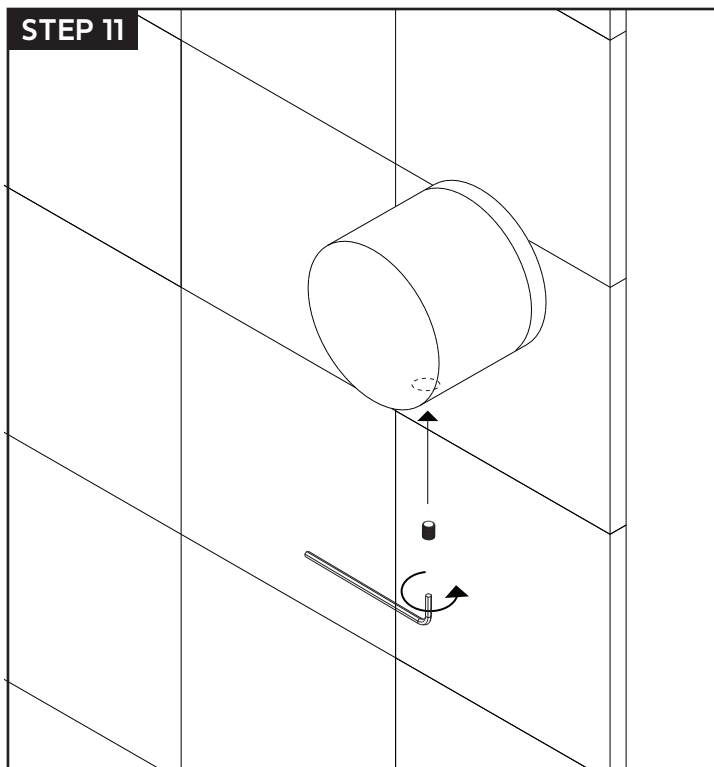

STEP 12

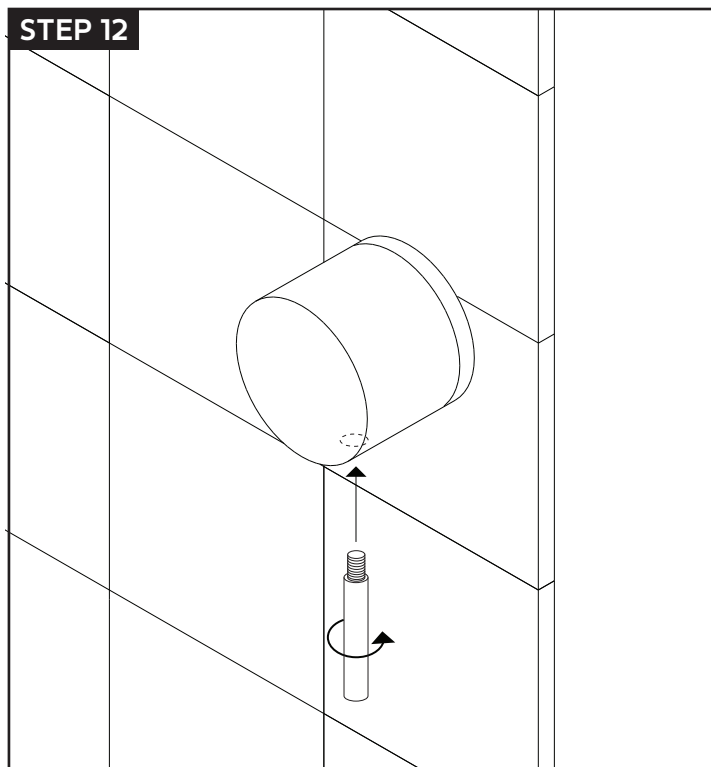


artos[®]

F502-7


opera 3-hole wall
mount tub filler

INSTALLATION STEPS

STEP 13

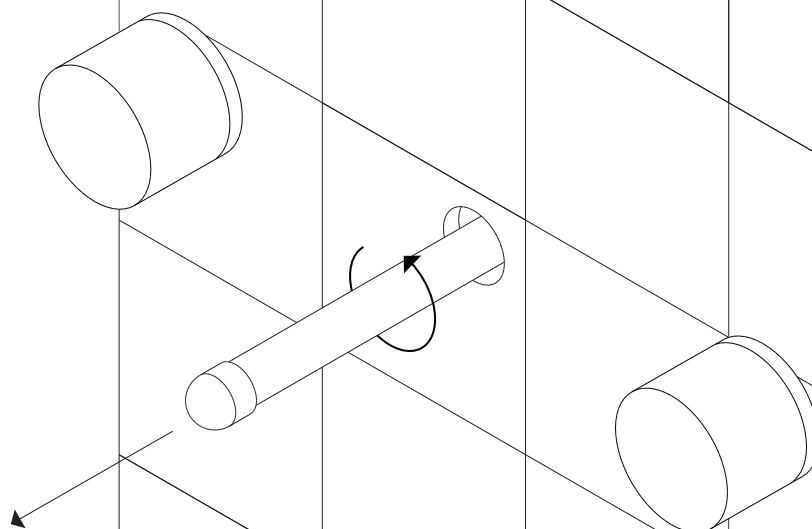

STEP 14

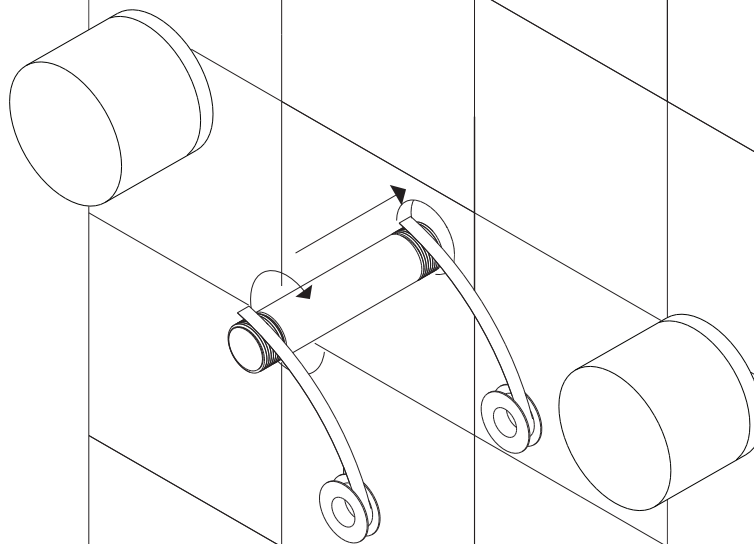


artos[®]

F502-7

opera 3-hole wall
mount tub filler

INSTALLATION STEPS

STEP 15


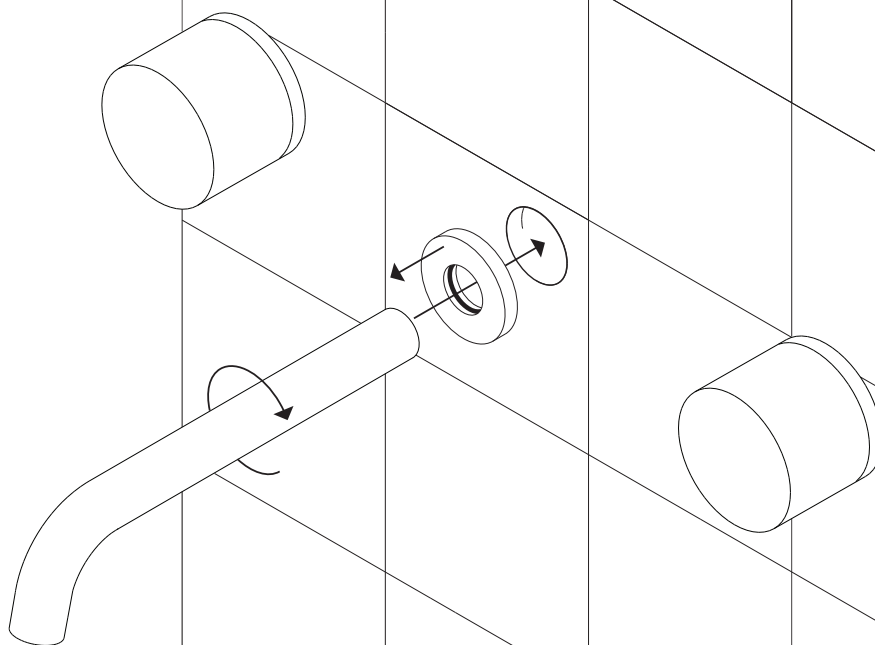


artos

F502-7

opera 3-hole wall
mount tub filler

PARTS BREAKDOWN

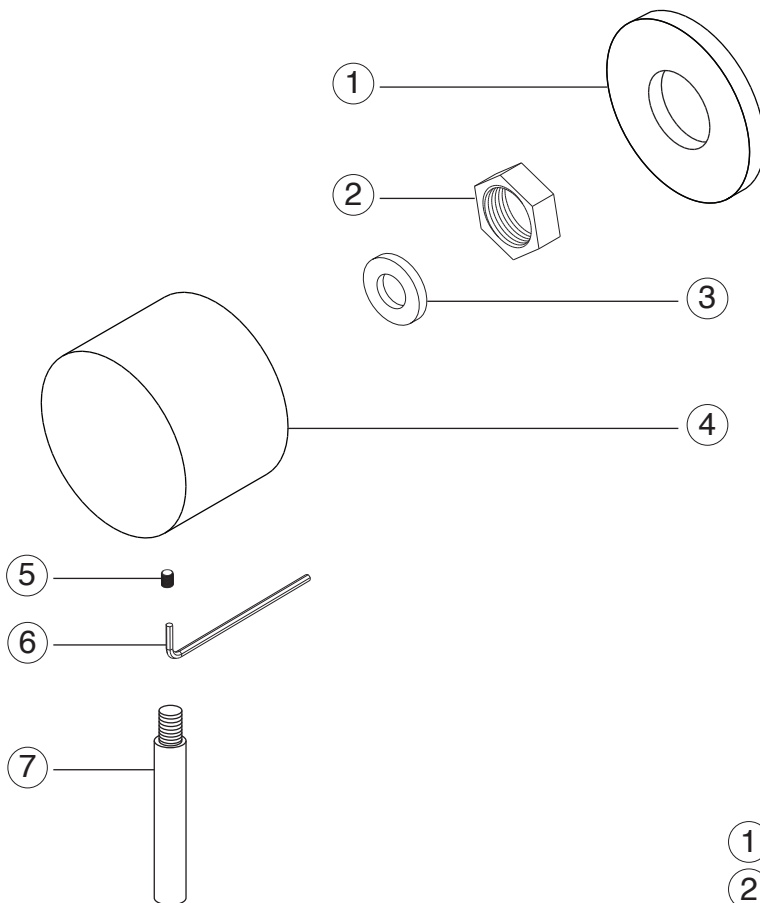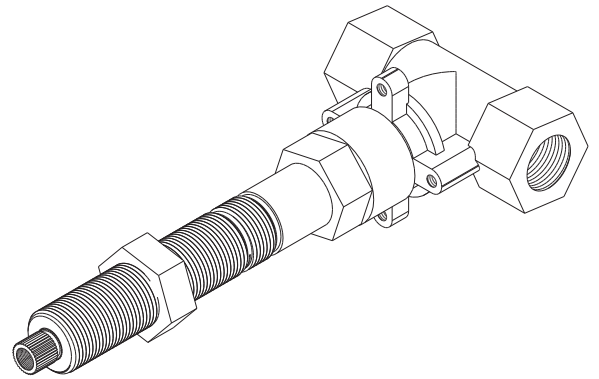


- ① ESCUTCHEON
- ② LOCKING NUT
- ③ NYLON WASHER
- ④ HANDLE
- ⑤ SET SCREW
- ⑥ ALLEN WRENCH
- ⑦ HANDLE LEVER

artos

F502-7

opera 3-hole wall
mount tub filler

PARTS BREAKDOWN

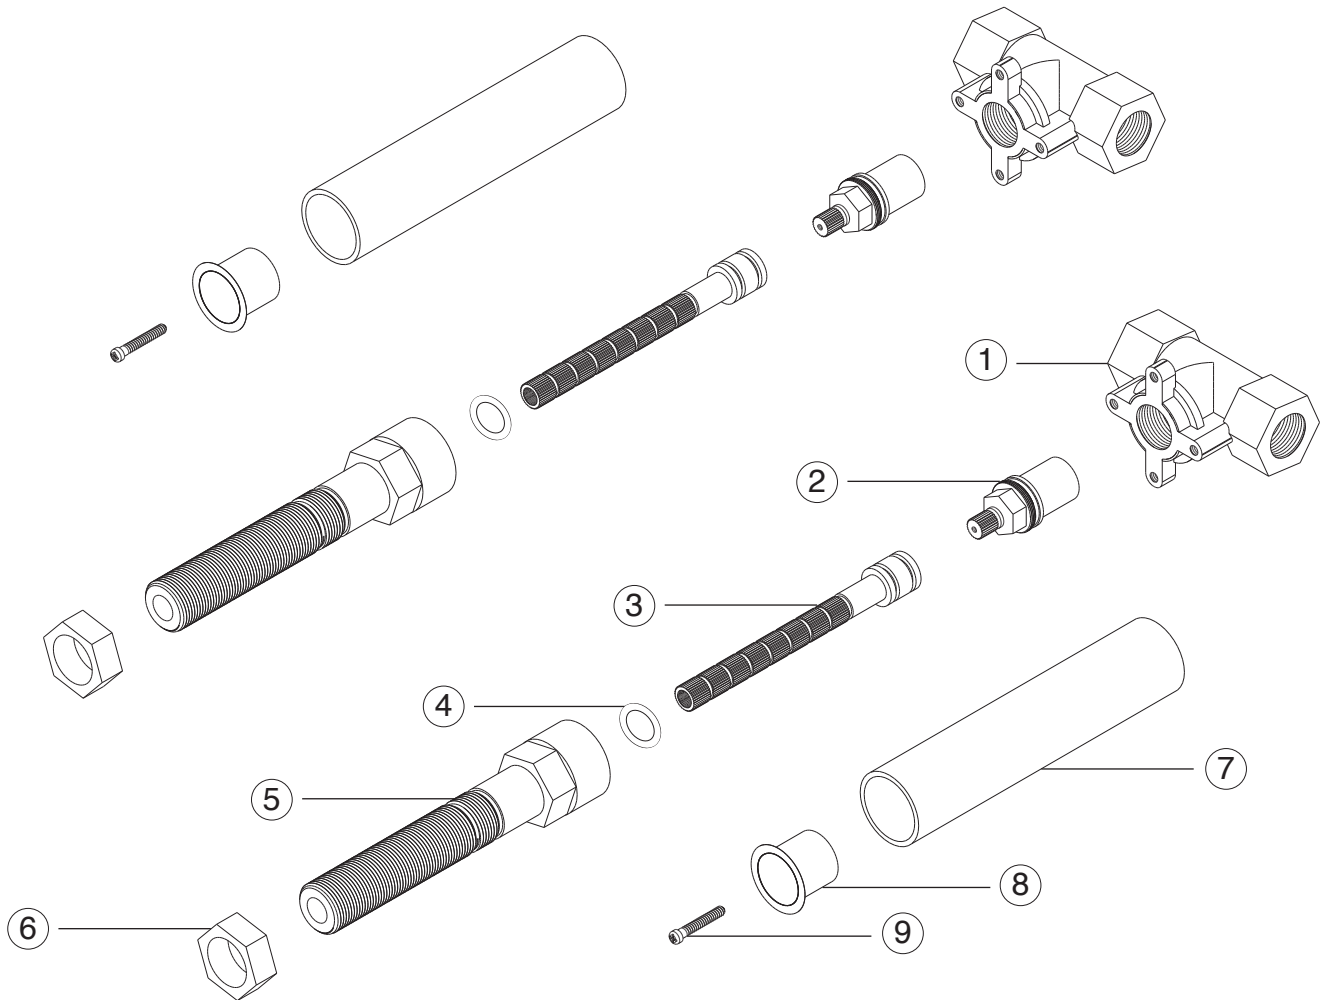


- ① VALVE BODY(2)
- ② CARTRIDGE (2)
- ③ HANDLE STEM (2)
- ④ STEM WASHER (2)
- ⑤ ESCUTCHEON STEM (2)
- ⑥ PLATE SECURING NUT (2)
- ⑦ PLASTER GUARD (2)
- ⑧ PLASTER GUARD CAP (2)
- ⑨ PLASTER GUARD SCREW (2)

artos[®]

F502-7

PARTS BREAKDOWN

opera 3-hole wall
mount tub filler

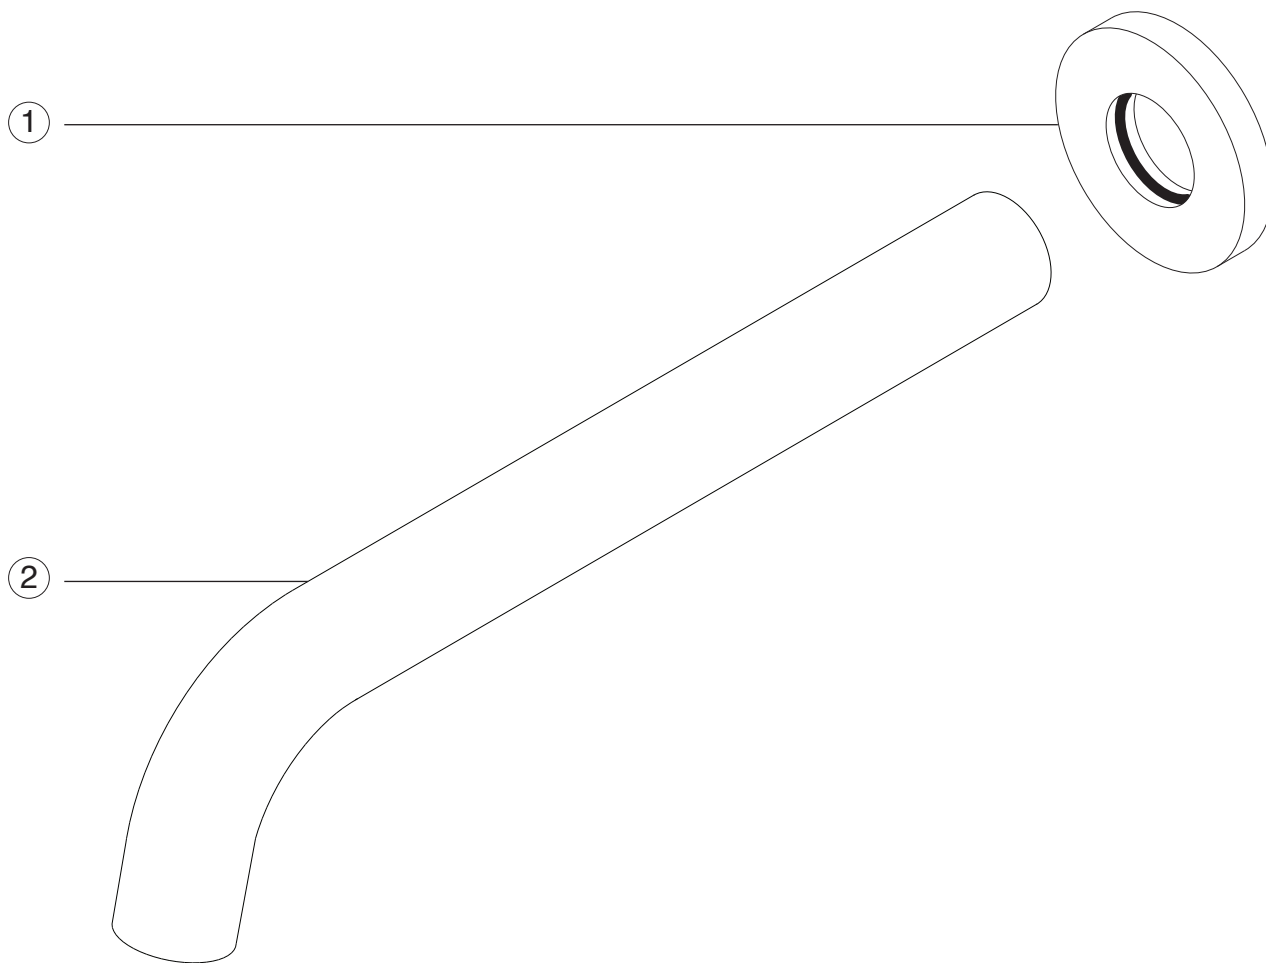

- ① ESCUTCHEON
- ② TUB FILLER SPOUT