



ASSEMBLY GUIDE

Please Note: in each installation step, screws cannot be tightened all at once. There should be some space left for adjustment. The screws can only be locked after the screws are completely installed.

Use your phone to scan the QR code to watch the installation guide video directly.

PACKAGE CONTENTS

The top backrest will be stuck with a piece of paper with "Top"

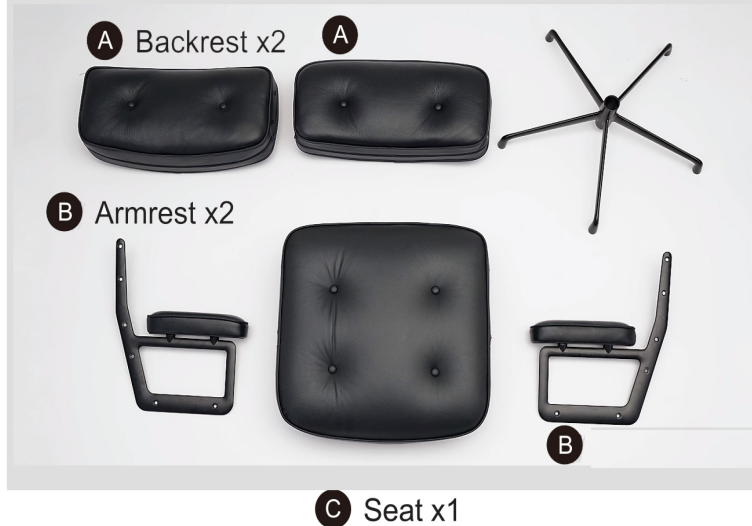

1 Screw both armrests to the seat.
(Screw in clockwise)
Note: do not tighten the screws immediately.

2 Fix the two backrests to the armrest Aluminum alloy frame with screws. (Screw in clockwise)




3 Insert the wheels into the base.



4 Buckle the bottom of the gas rod into the base.




5 Align the installed seat into the air pressure bar.

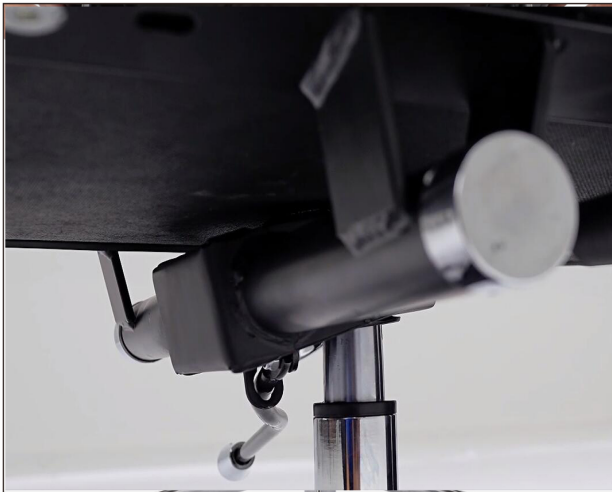

6 Seat tifting tension adjustor.
Loose/Locking



7 Seat height adjuster

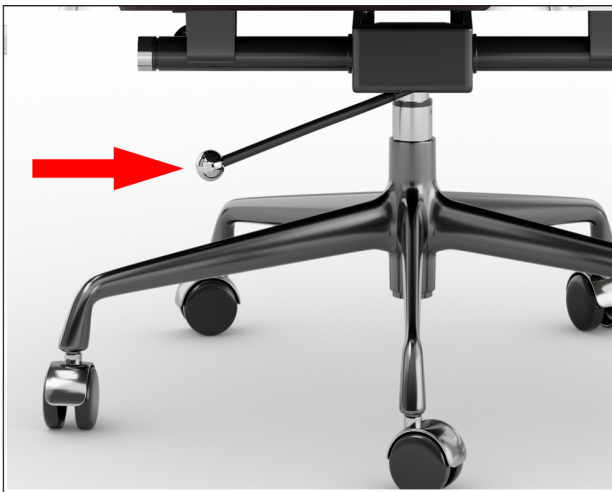

8 Finished

