


# Assembly & Installation Instructions

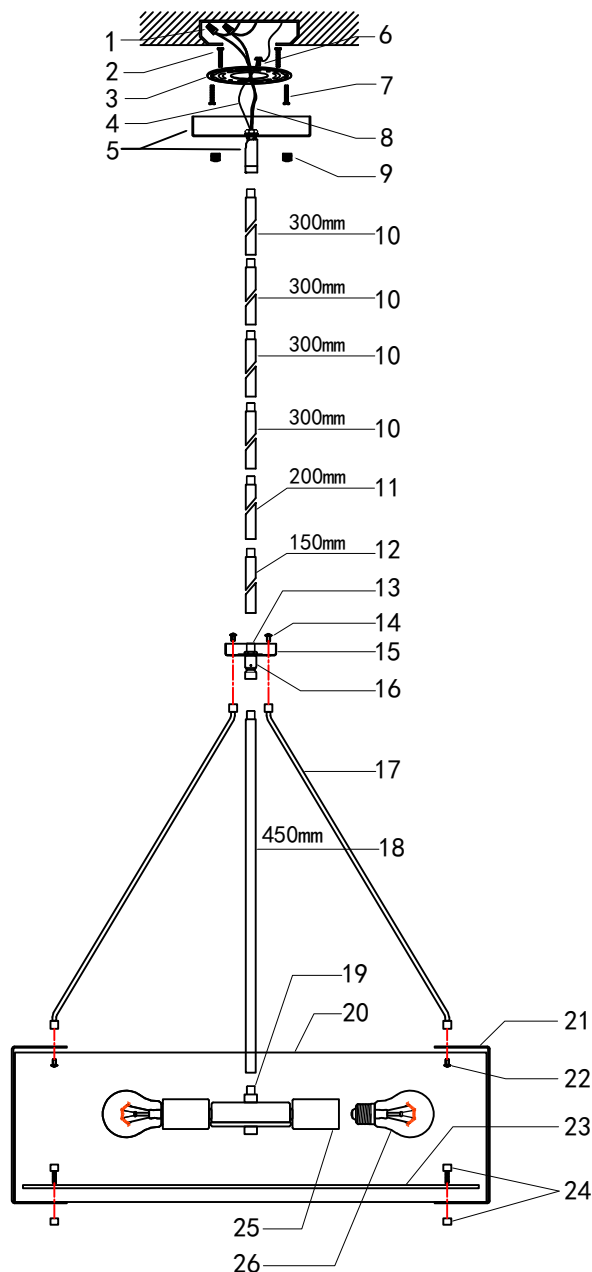

## PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

**IMPORTANT:**

1. **WARNING** - Disconnect power before relamping or wiring the fixture.  
Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

## INSTALLATION STEPS:

- A. Use screw (22) to fasten the lower end of the lamp rod (17) to the upper end of the bent plate (21).
- B. Use the bent plate (21) to clamp the lamp shade (20) and glass sheet (23), then use screw (24) to fix the glass sheet (23) to the lower end of the bent plate (21).
- C. Pass the main wire (8) and ground wire (4) through the hanging rod (18), rocker arm (16), and threaded pipe (13). Then fasten the hanging rod (18) to the threaded pipe (19), and use screw (14) to secure the upper end of the lamp rod (17) to the connector (15).
- D. Pass the main wire (8) and ground wire (4) through the hanging rods (12, 11, 10) (choose your desired length) and the canopy (5). Then secure the hanging rods to the threaded pipe (13) and to the swivel joint on the canopy.
- E. Secure the mounting bracket (3) to the junction box with mounting screws (7).
- F. Connect the wires using the wire caps (1) as follows:
  - Connect the fixture **BLACK** wire (L) to the home **LIVE/ HOT** wire.
  - Connect the fixture **WHITE** wire (N) to the home **NEUTRAL** wire.
  - Secure the fixture ground wire (4) and external ground wire to mounting bracket (3) with green screw (6), then use the wire cap to connect the fixture ground wire to the external ground wire.
- \***Note:** Ensure no bare wire is exposed to prevent leakage.
- G. Pass the canopy (5) through the screws (2), then secure the canopy to the mounting bracket with nuts (9).
- H. Install E26 bulbs (26) (not included) onto the lamp holders (25).