


### Features

- *ExoCrylic™*
- 8 color-matched Kohler hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- T-style heater
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Drop-in [-H] or 3-side integral flange [-LH, -RH]
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)

### 5' BATH WHIRLPOOL WITH HEATER **K-1947-H** ALSO K-1947-LH, K-1947-RH

ADA

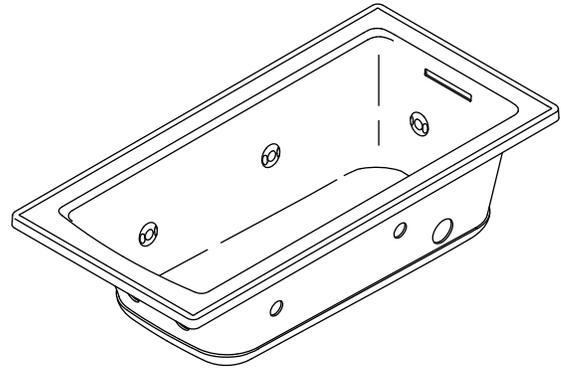

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B45.5/IAPMO Z124
- CSA C22.2 No 218.2
- ASME A112.19.7/CSA B45.10
- UL 1795
- NMJ-J-521

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1947-H	5' bath whirlpool with heater – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1947-LH	5' bath whirlpool with heater – 3-side integral flange, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1947-RH	5' bath whirlpool with heater – 3-side integral flange, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
Required Accessories			
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### Product Specification

The ExoCrylic bath whirlpool shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height. Bath whirlpool shall feature 8 color-matched jets, and pump with air switch and grounding-type plug-in cord. Bath whirlpool shall have a T-style heater. Bath whirlpool shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath whirlpool shall be for drop-in [-H] or 3-side integral flange [-LH, -RH]. Bath whirlpool shall be Kohler Model K-1947-\_\_\_\_\_-\_\_\_\_\_.

# ARCHER®

## Technical Information

Fixture*:	
Bathing well	
Basin area, bottom	45-1/8" (1146 mm) x 19-11/16" (500 mm)
Basin area, top	52-1/8" (1324 mm) x 22-1/16" (560 mm)
Weight	98 lbs (44.5 kg)
To overflow	
Water depth	15-1/8" (384 mm)
Capacity	57 gal (216.9 L)
* Approximate measurements for comparison only.	

Drop-in cutout	58-1/2" (1486 mm) x 28-1/2" (724 mm)
----------------	--------------------------------------

Pump:	V	Hz	A	
1-speed	120	60	7	
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

## Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz

## Installation Notes


Install this product according to the installation guide.

Pump is supplied with 24" (610 mm) grounding-type plug-in cord.

Floor support under this product must provide for a minimum of 48 lbs/square foot (234 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Will comply with **ADA** when installed per Section 607 Bathtubs of the Act.

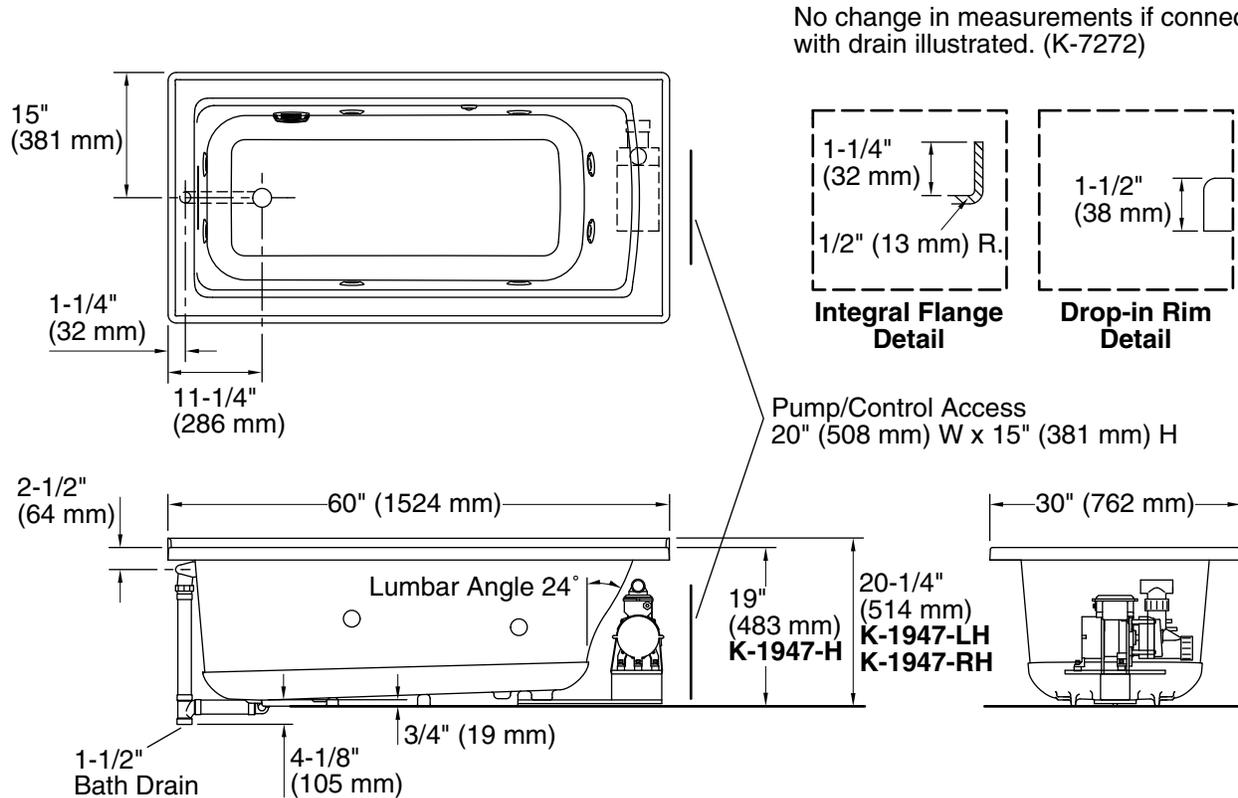

## Product Diagram