


Applicable faucets (including but not limited)

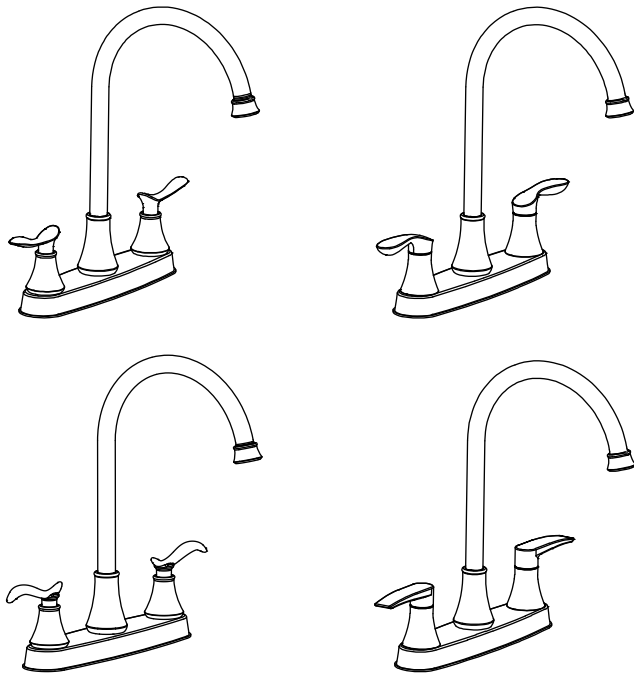


## INSTALLATION


Prior to installation: Shut off water supply. Remove old faucet.  
Clean sink/countertop surface in preparation for new faucet.

<p><b>1</b> Apply some plumbers putty or other suitable sealant to the bottom edge of undercover.</p>	<p><b>2</b> Align and press into place.</p>	<p><b>3</b> Insert the faucet through sink.</p>	<p><b>4</b> Screw the nut onto shank, leaving approximately 0.12" (3mm) between the ring and the sink.</p>
<p><b>5</b> Tighten fitting nuts with adjustable wrench. Do not over tighten!</p>	<p><b>6</b> Remove excessive putty, adjust slightly the position of faucet.</p>	<p><b>7</b> Connect and tighten the supply hoses.</p>	

## TOOLS YOU WILL NEED

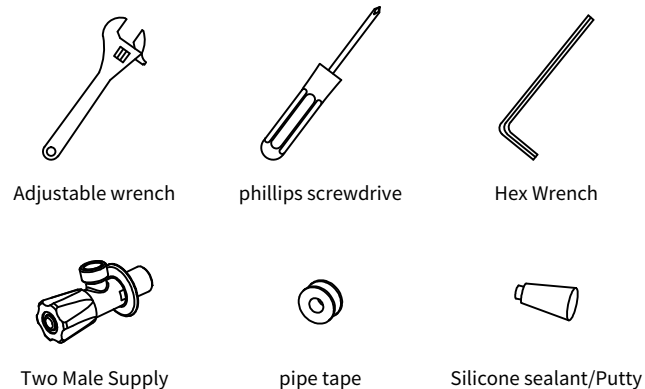

## 8 Check for leaks.

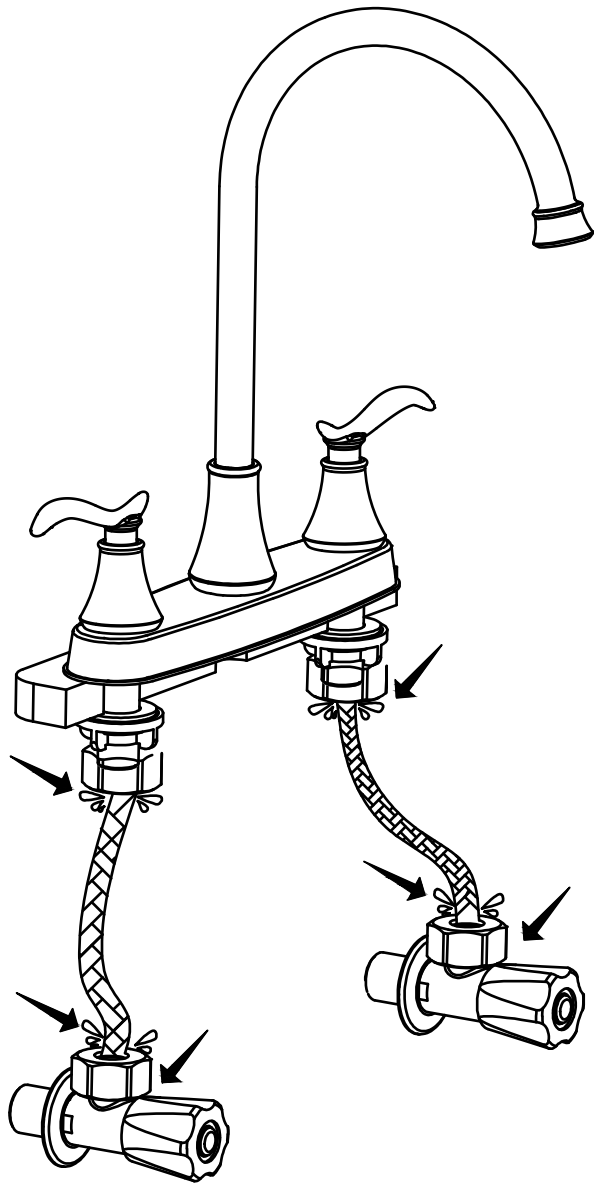

## 9 Care and Cleaning

For best results, keep the following in mind when caring for your product:

- Use a mild detergent such as liquid dishwashing soap and warm water for cleaning. Do not use abrasive cleaners that may scratch or dull the surface.
- Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.
- Always test your cleaning solution on an inconspicuous area before applying to the entire surface.
- Do not allow cleaners to sit or soak on the surface.
- Wipe surfaces clean and rinse completely with water immediately after cleaner application. Rinse and dry any overspray that lands on nearby surfaces.

