




Product Installation Instructions

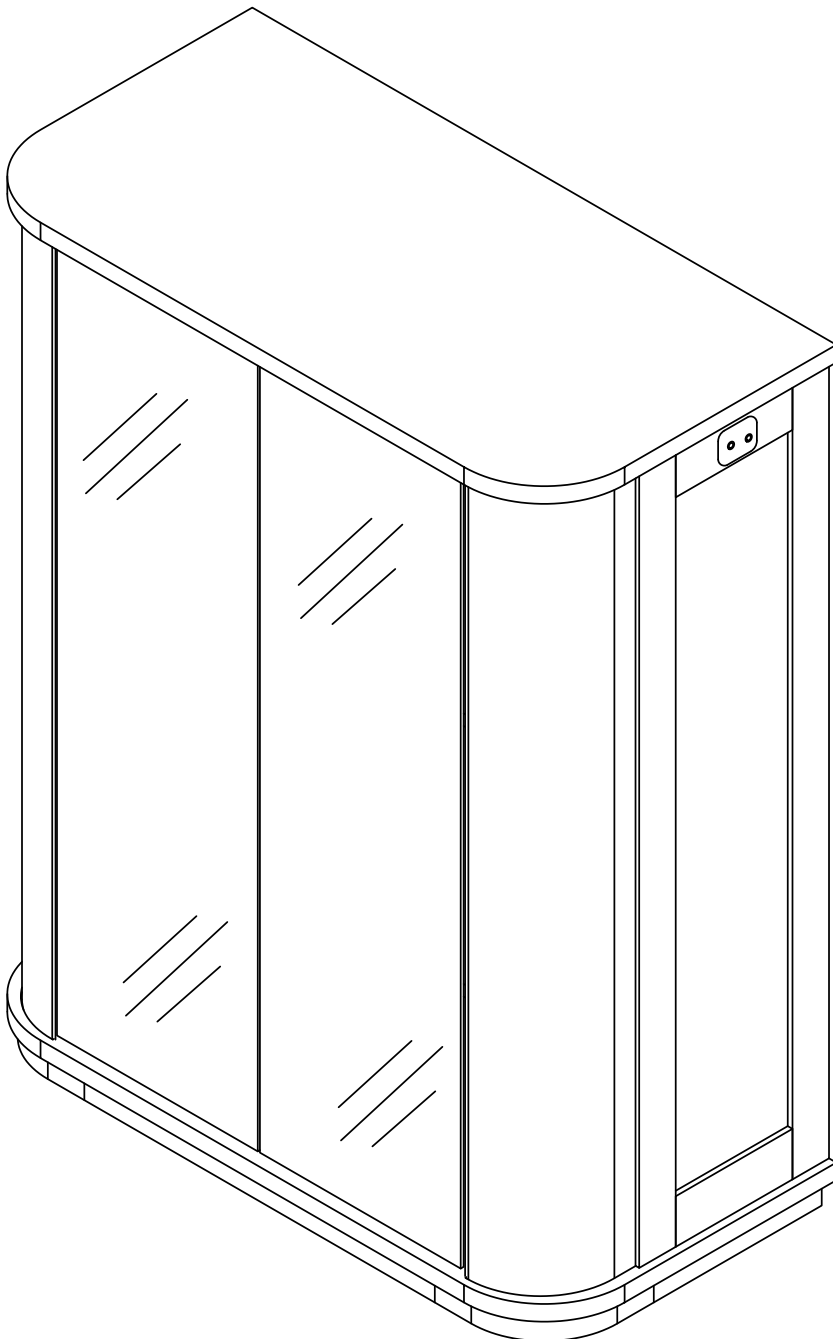




Ax1




Bx1




Cx2

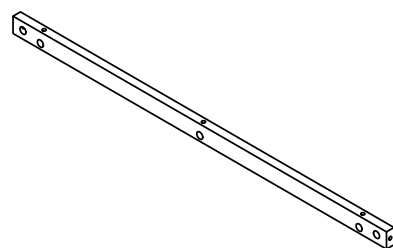


Dx1



Ex1

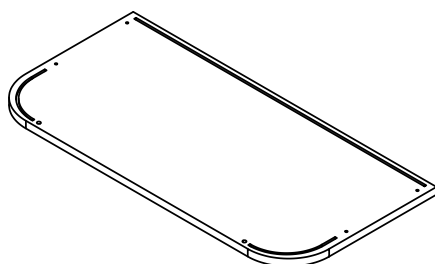


Fx1




Gx1




Hx1

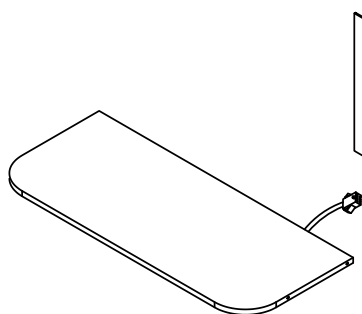

Ix2




Jx1




Kx2




Lx2

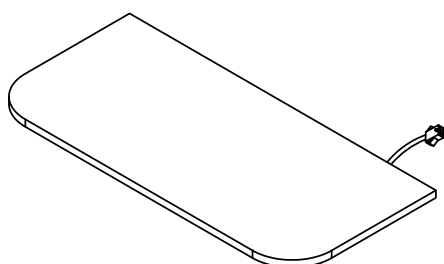










Mx1




Nx2



1


①		Two in one screw (6x28mm)	32pcs +4pcs		
②		Two in one nut (10x12mm)	32pcs +4pcs		
③		Non-slip pads (50x10x2mm)	10pcs +2pcs		
④		Rebound device & Screw (3x16mm)	4pcs +1pcs 1pcs		
		Iron sheet	2pcs		
		Hinge	4pcs2pcs2pcs		
⑤		Double end connecting line	1pcs		
⑥		Wire clamp	2pcs +1pcs		
⑦		Fixing clip & screw (3x16mm)	10pcs +2pcs		
⑧		Foot nail	6pcs +2pcs		
Anti tipping hardware					
⑨	 x1	 (3.5x12mm) x1	 x2	 (4x45mm) x1	 x1
		AC/DC Adapter (12V=2.0A)	1pcs		
Double-head screwdriver, use as required					
 1pcs					

Product structure decomposition

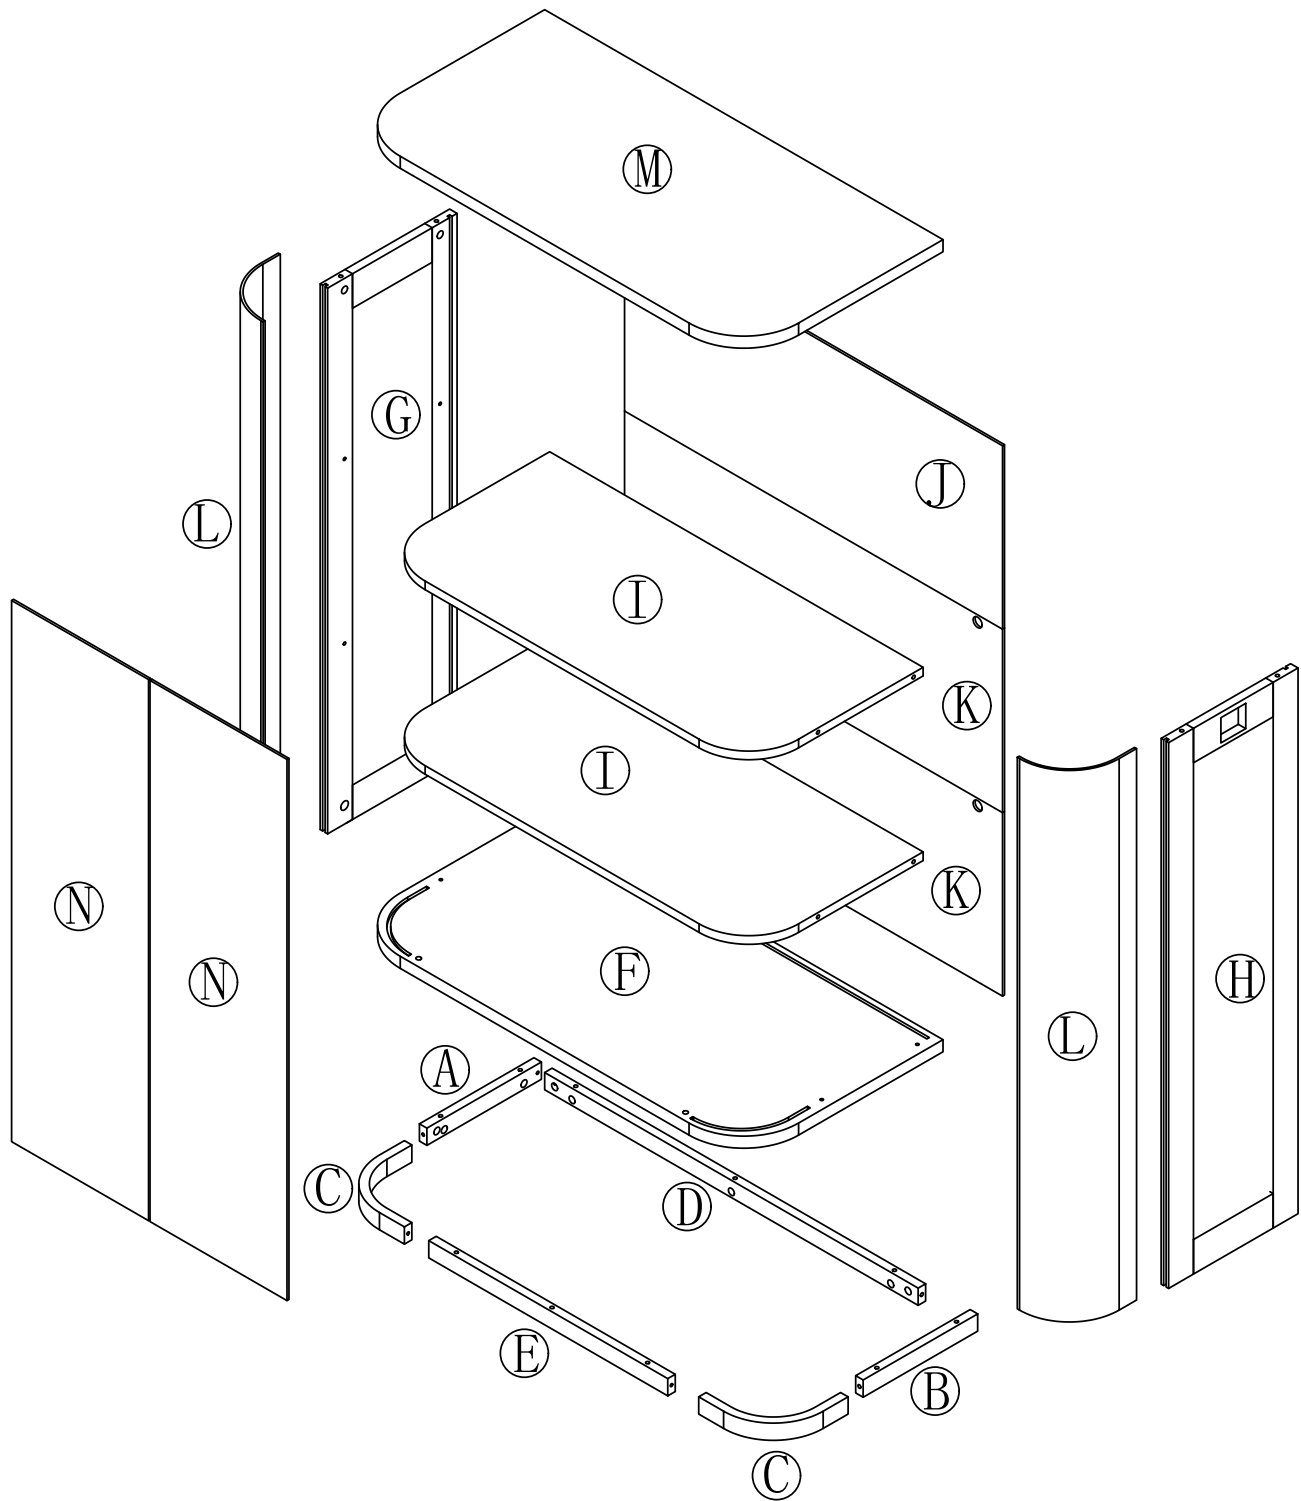


Use parts ① and ②



Step1

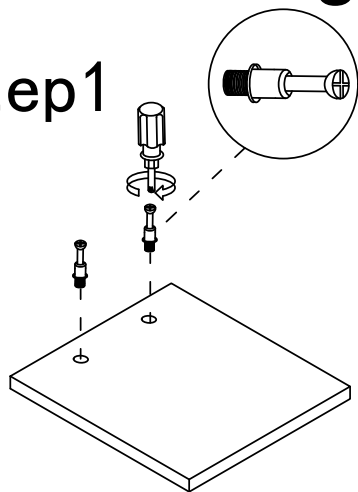


Step2

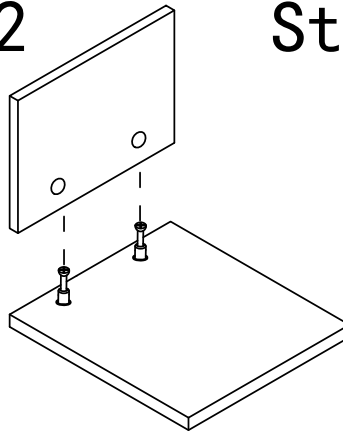

Step3


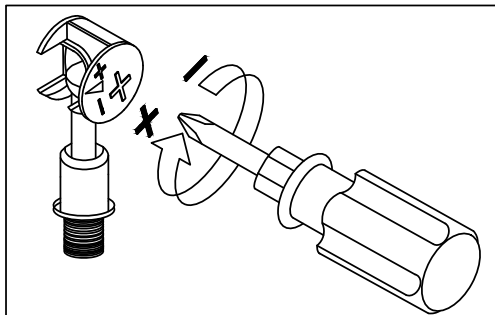
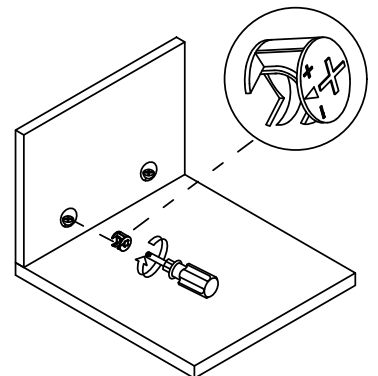


Use a screwdriver to lock in the direction of the "+" sign


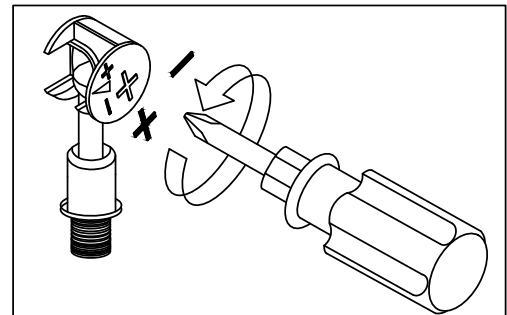


Disassemble along the direction of "-" sign



Step 1

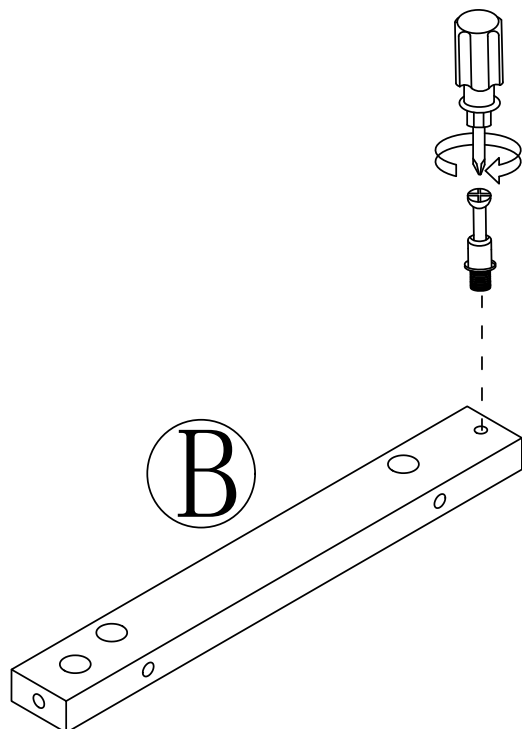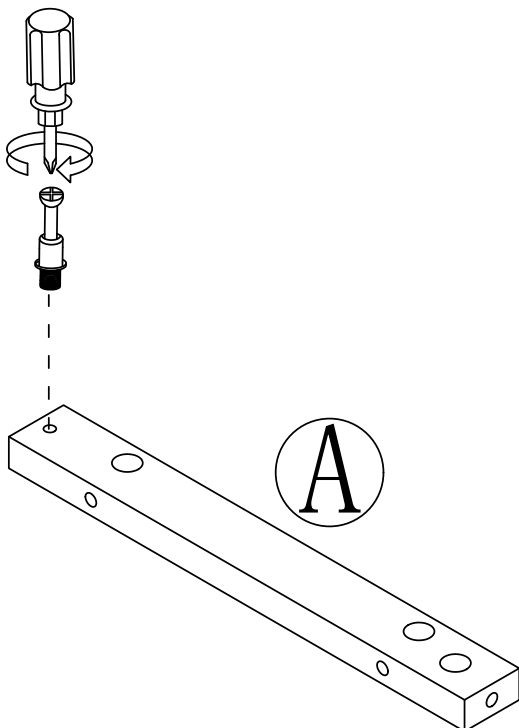

Step 2

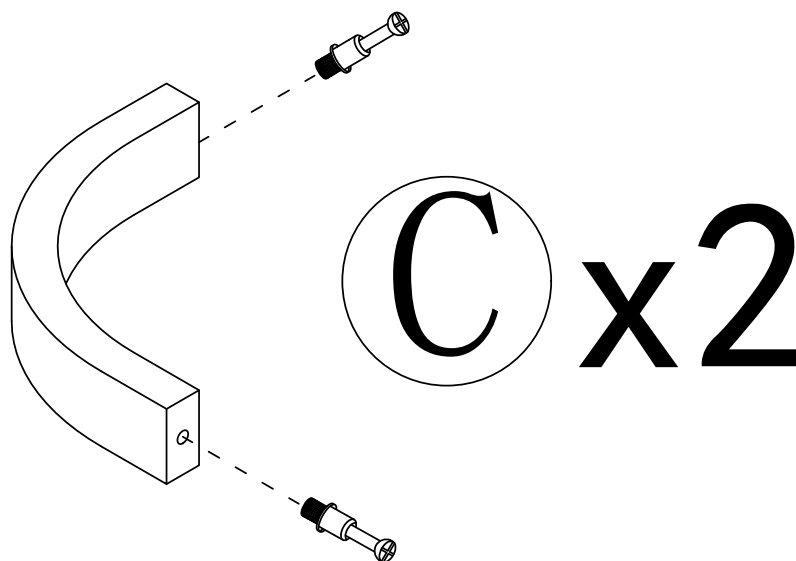

Step 3

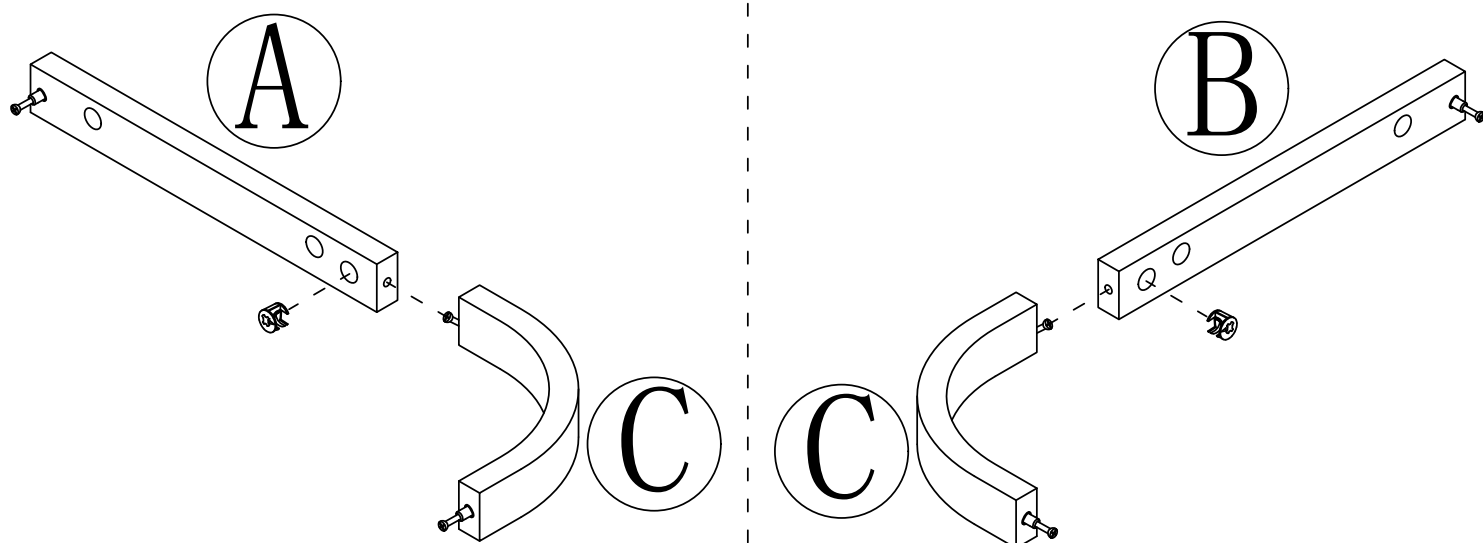


Step 4

②



x2

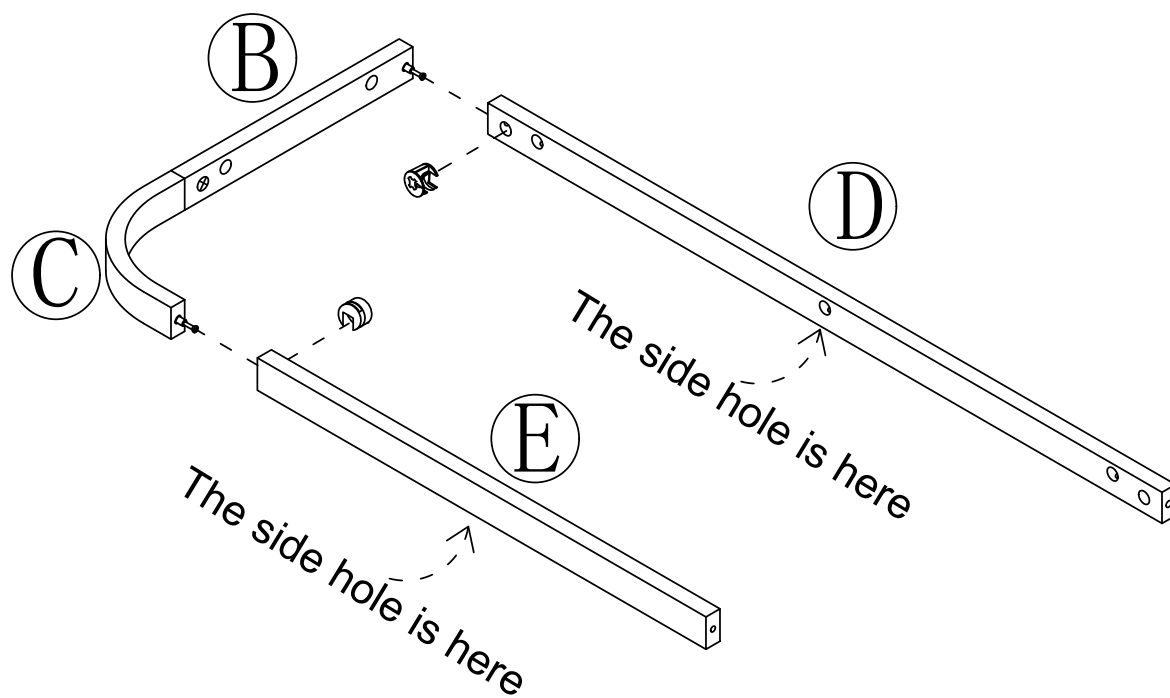


Step 5

②





x2

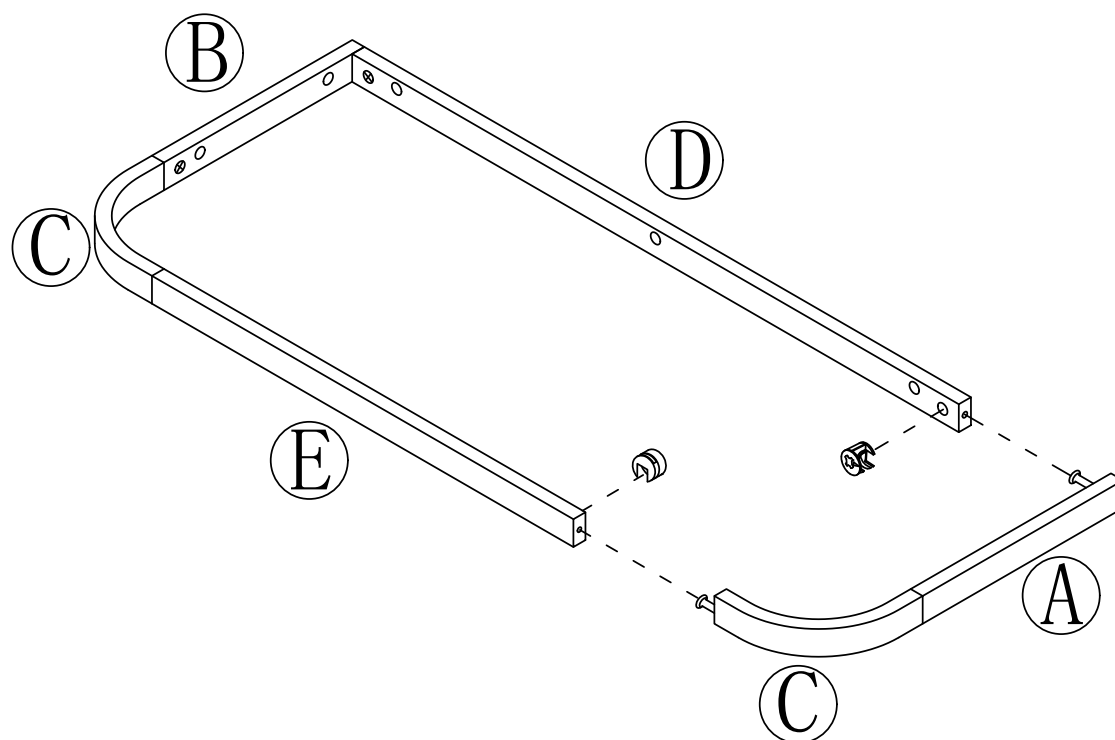


6

Step 6

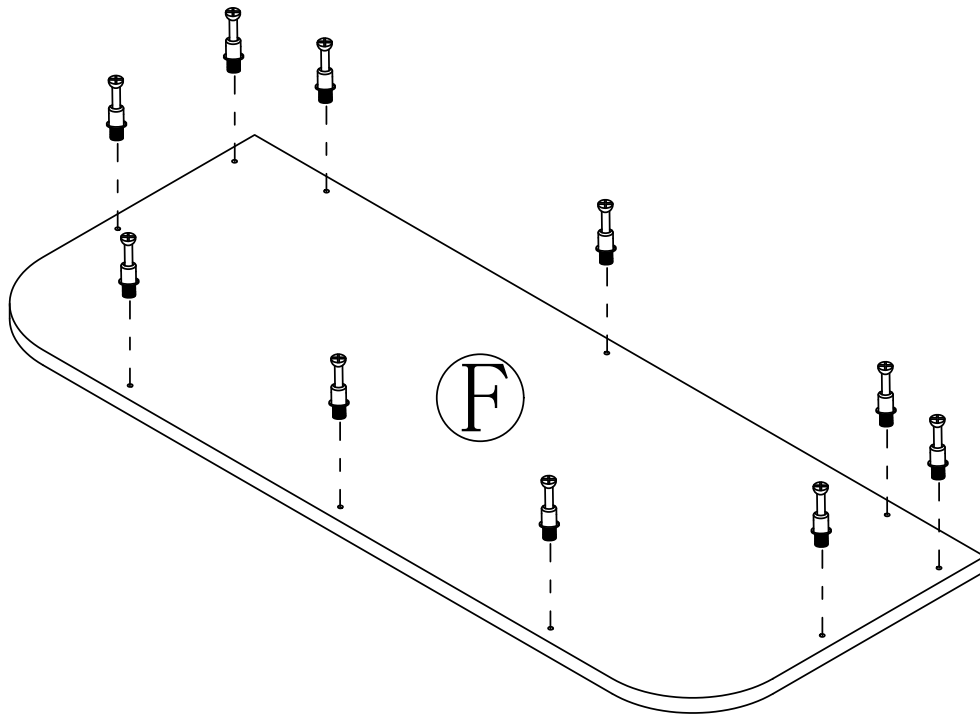


Step 7

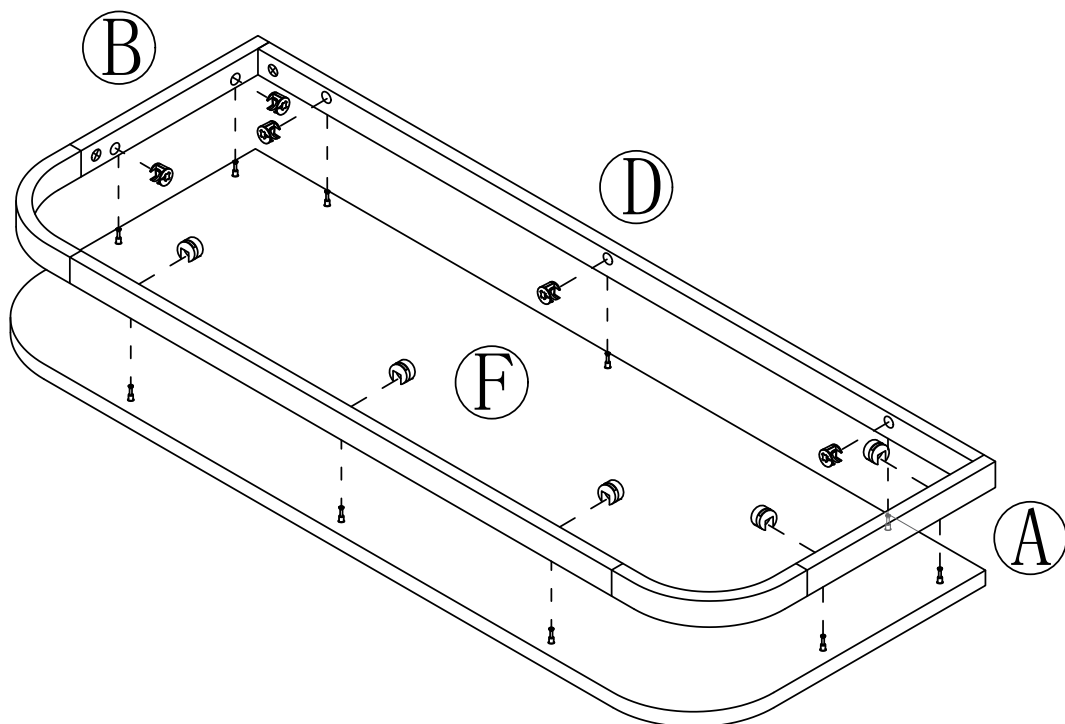

Step 8

3




x10

Tear off release paper and stick the black foot pad on the board

F

Step 9



1





x4

F

Step 10

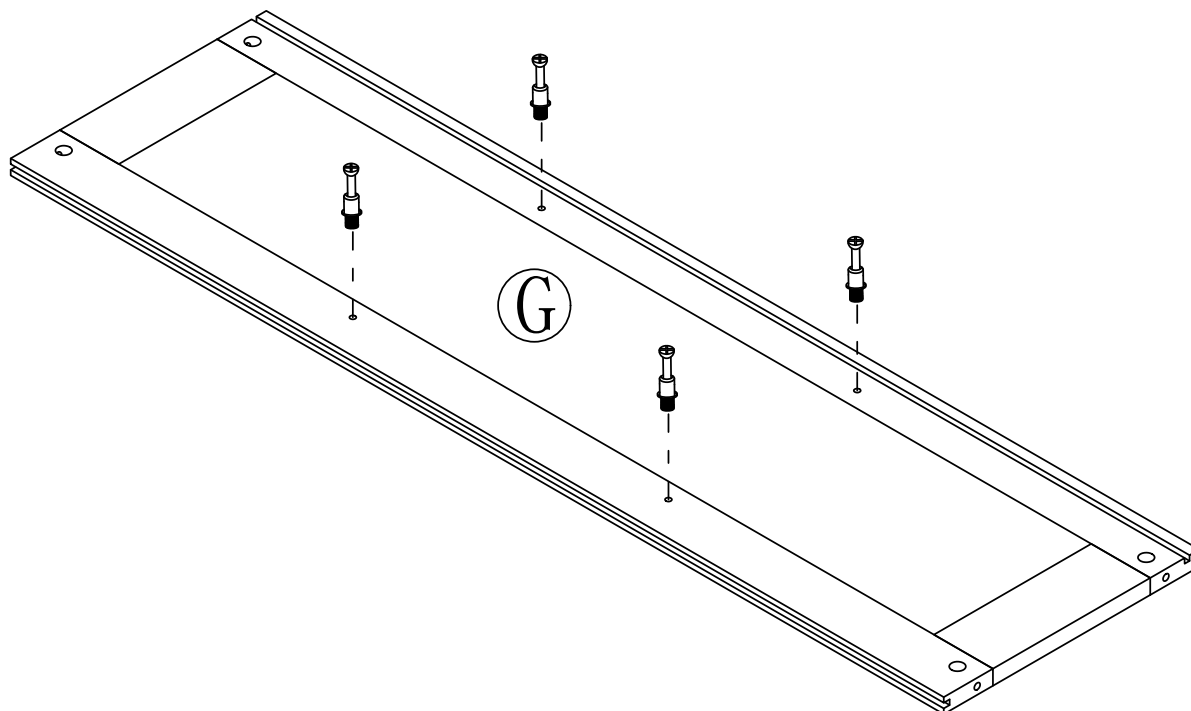

Step 11

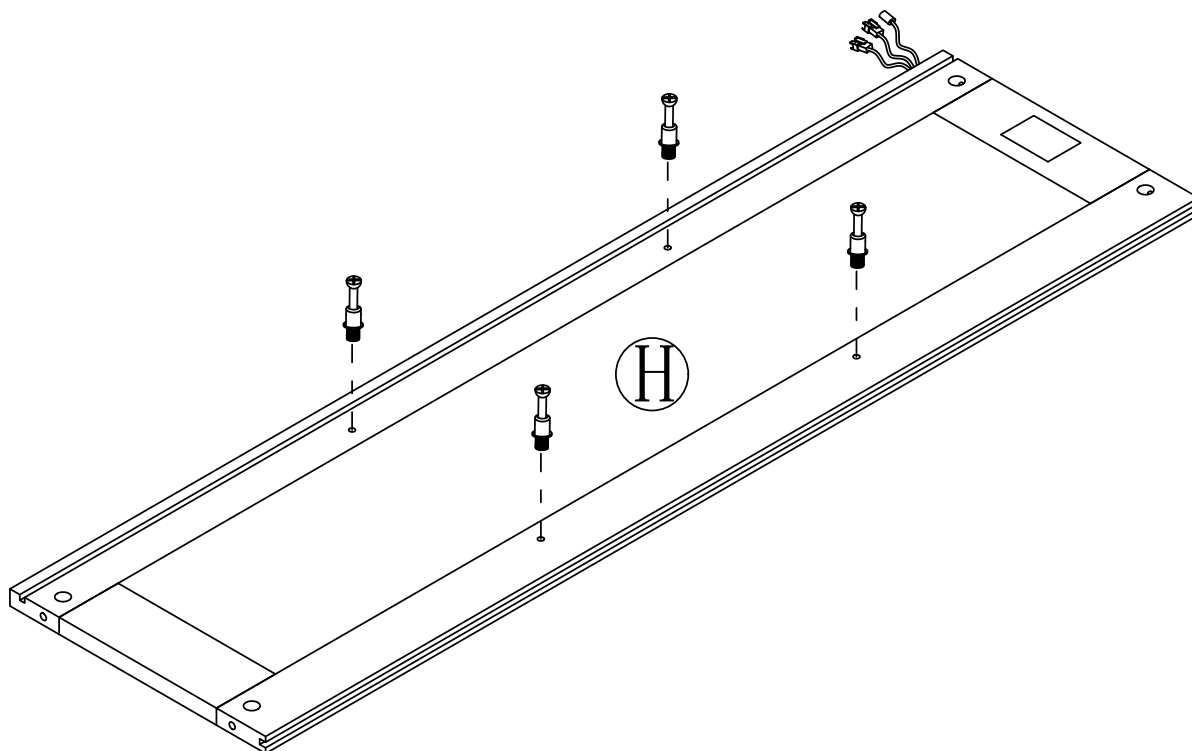


Step 12

2



x8

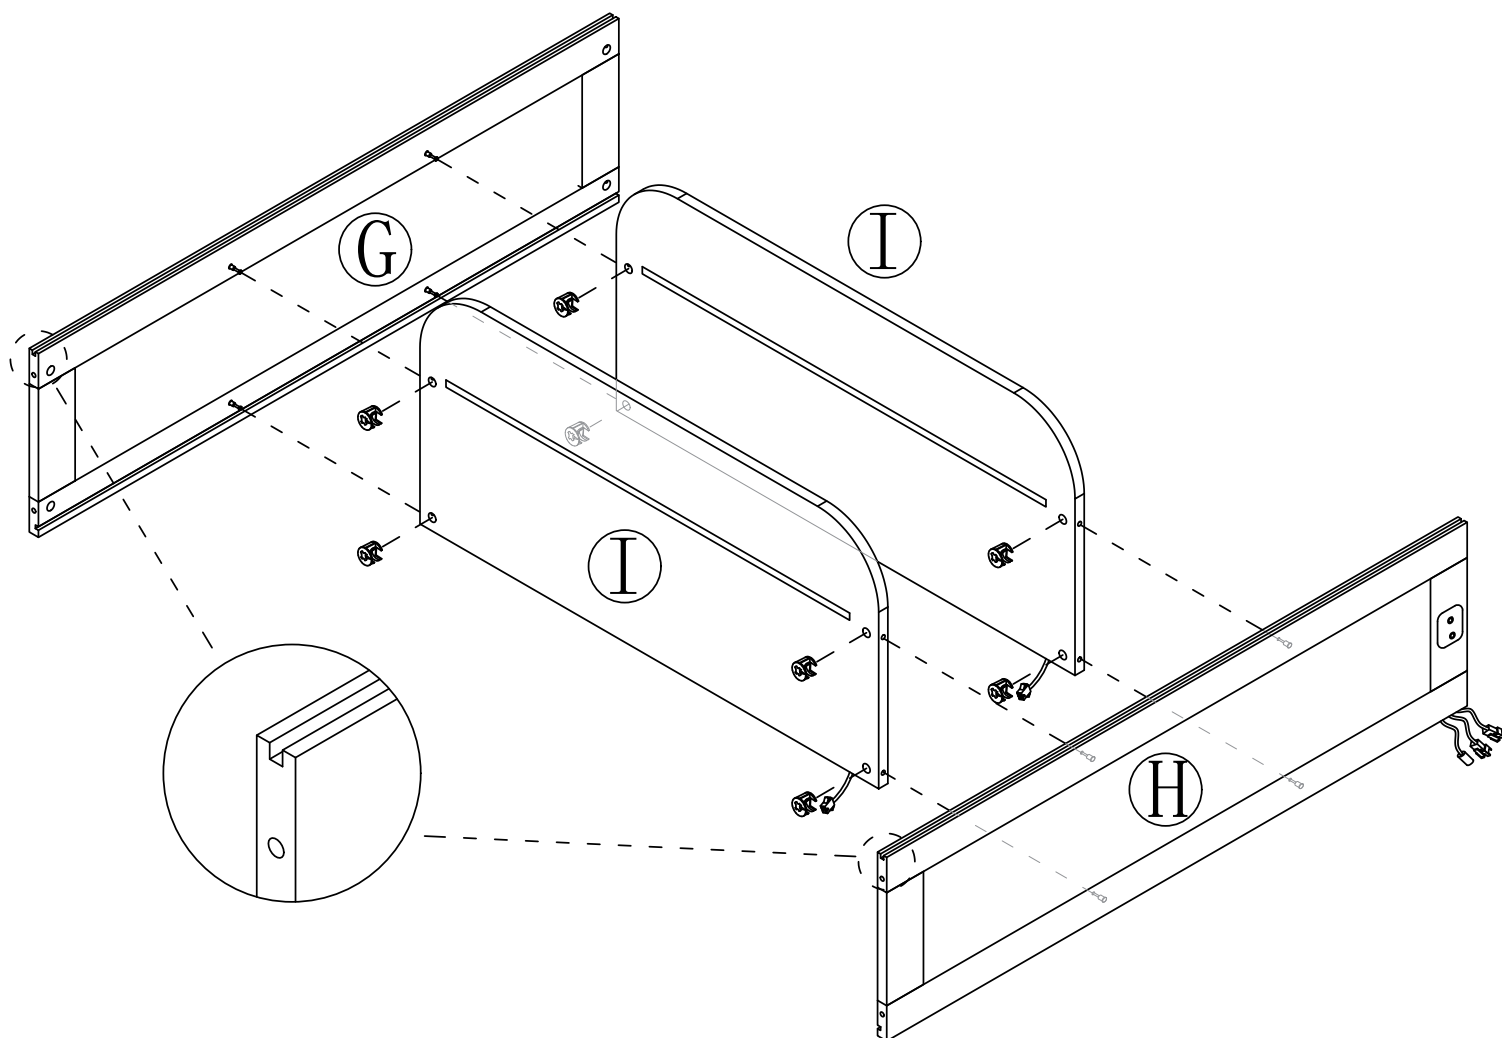


Step 13


2




x4

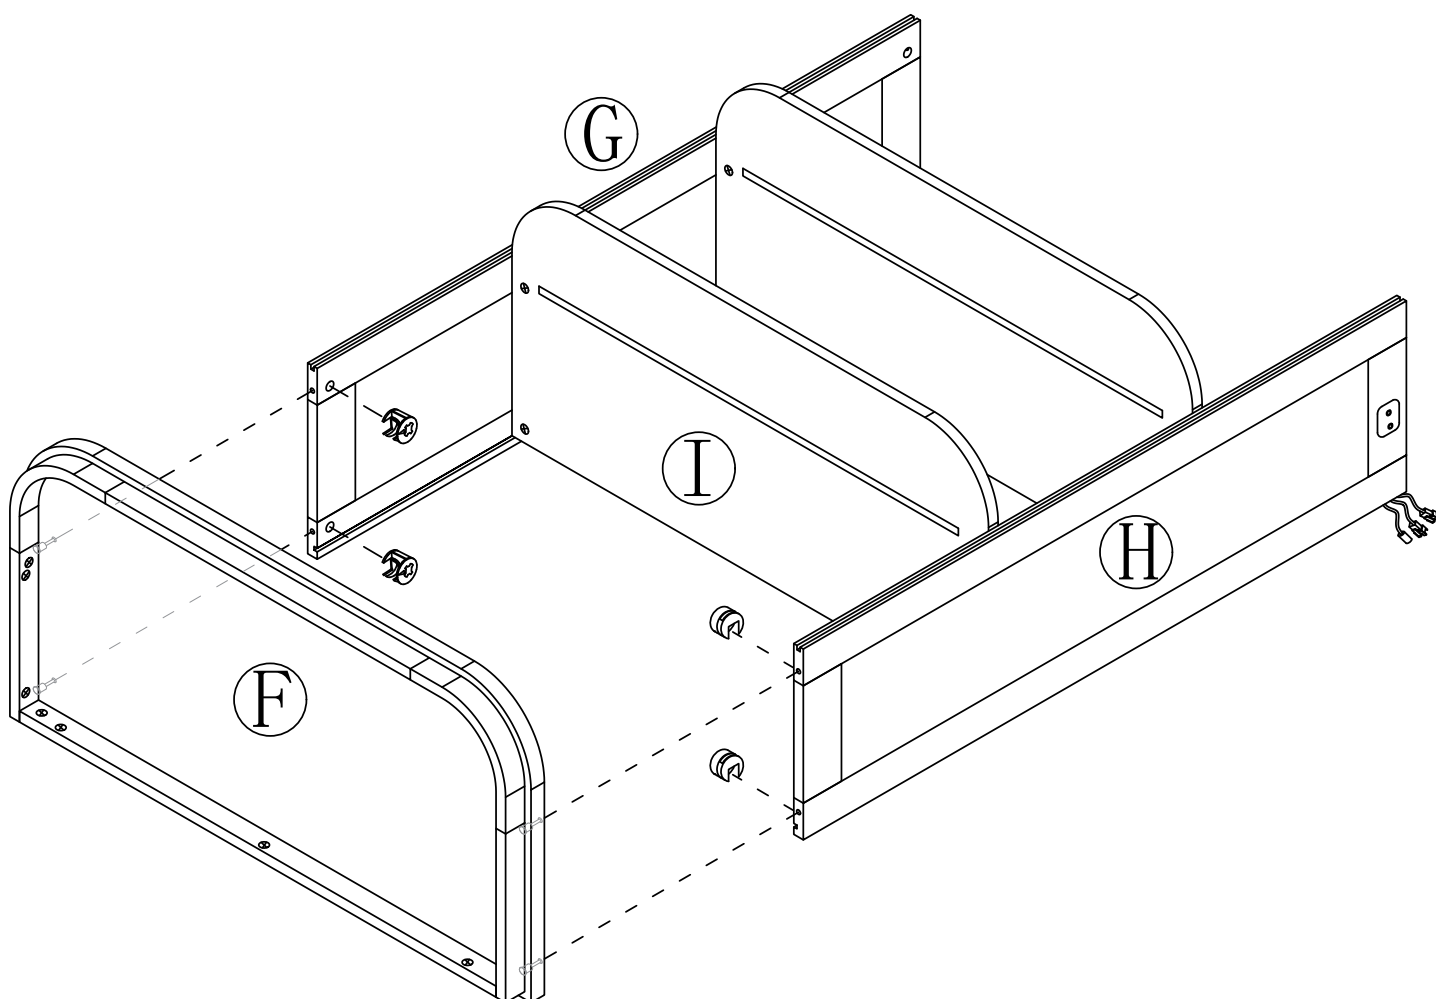



Step 14

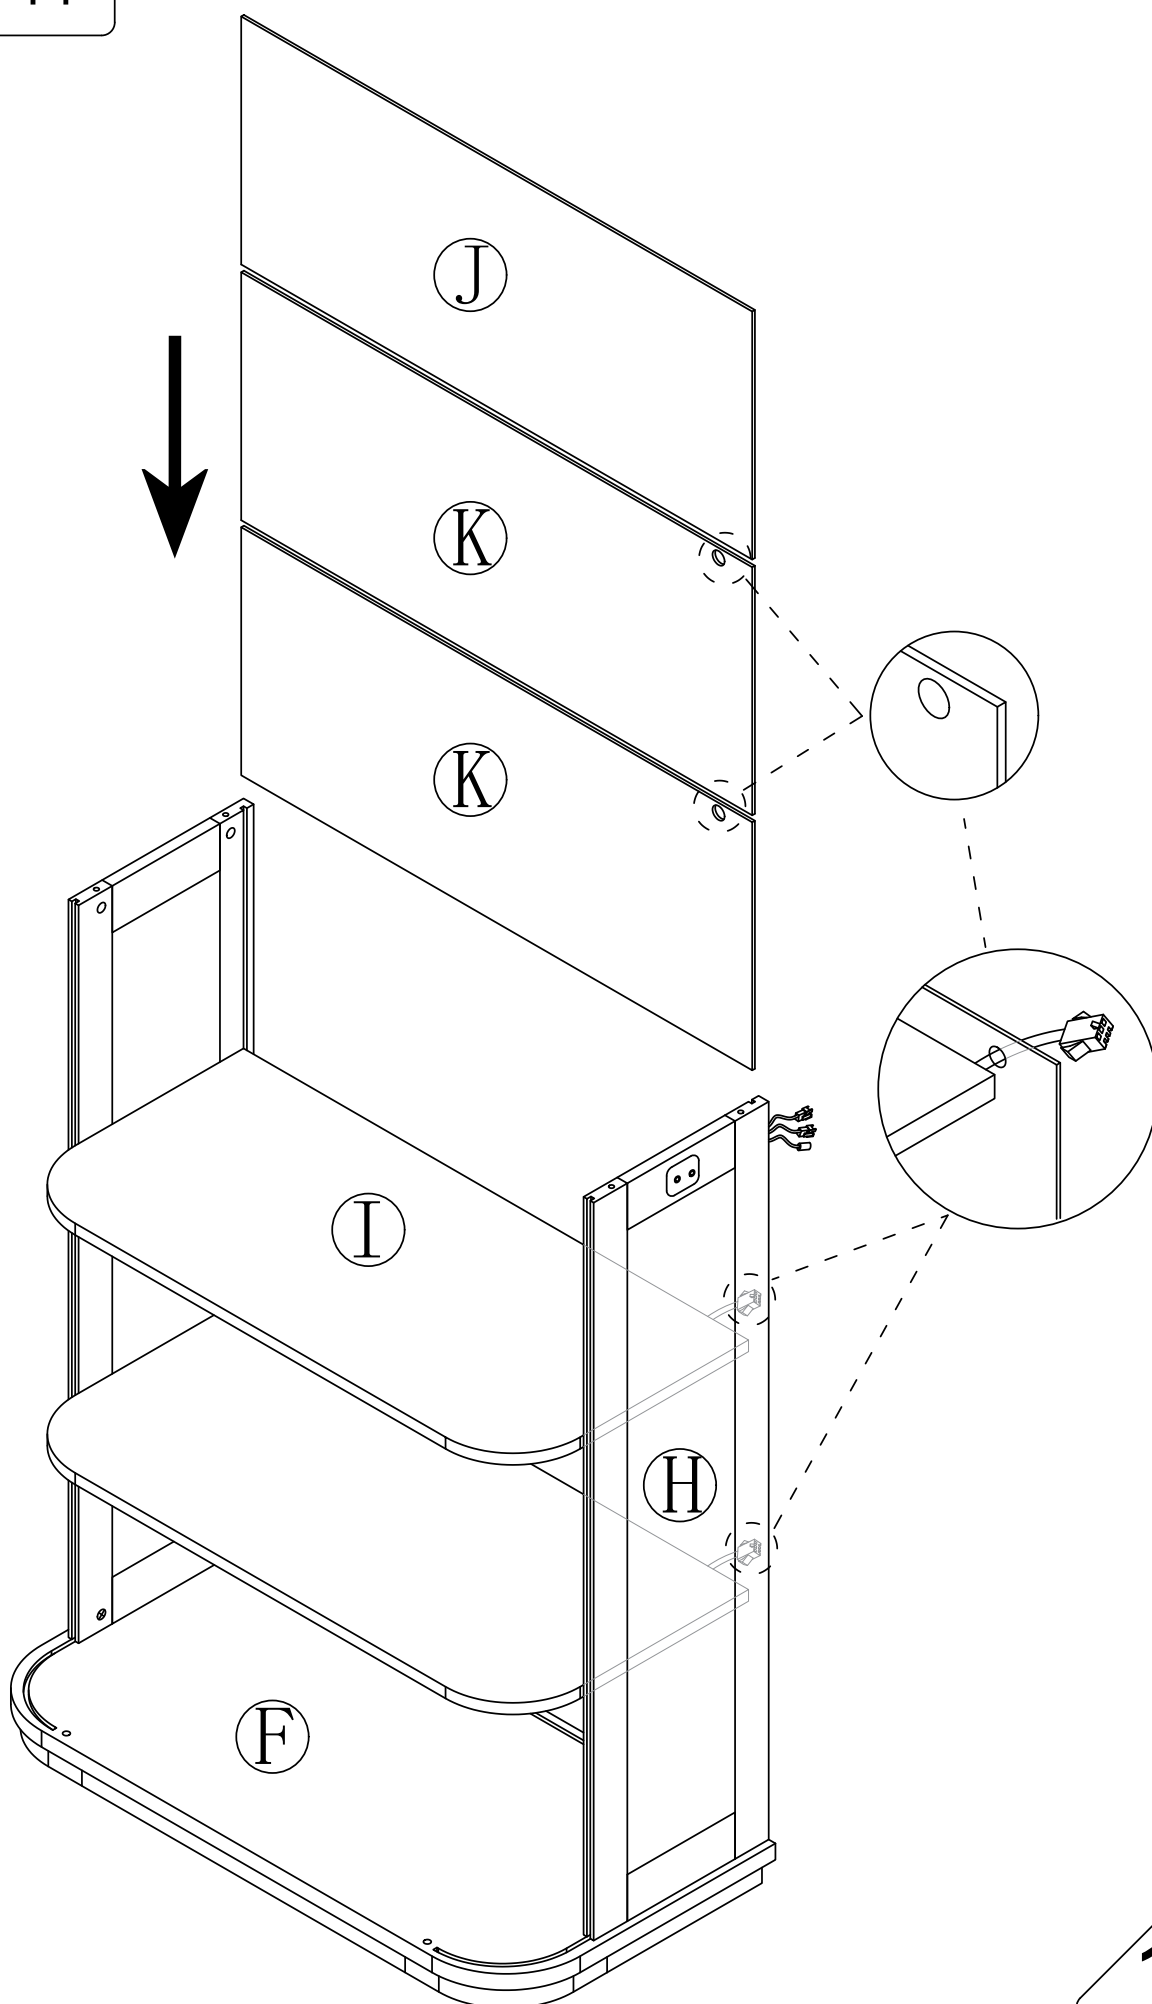



Step 15

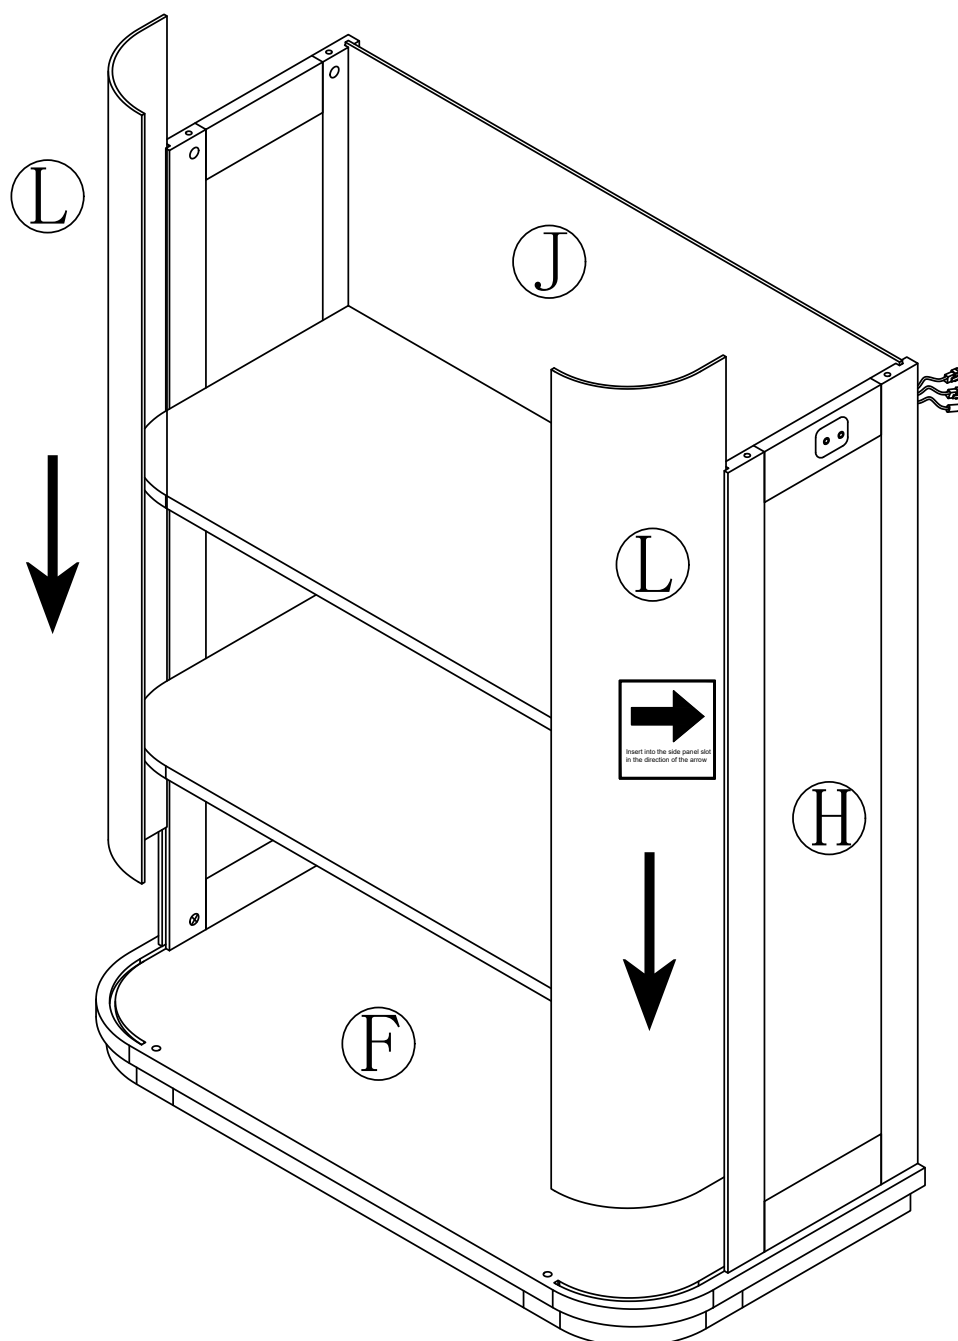

Step 16

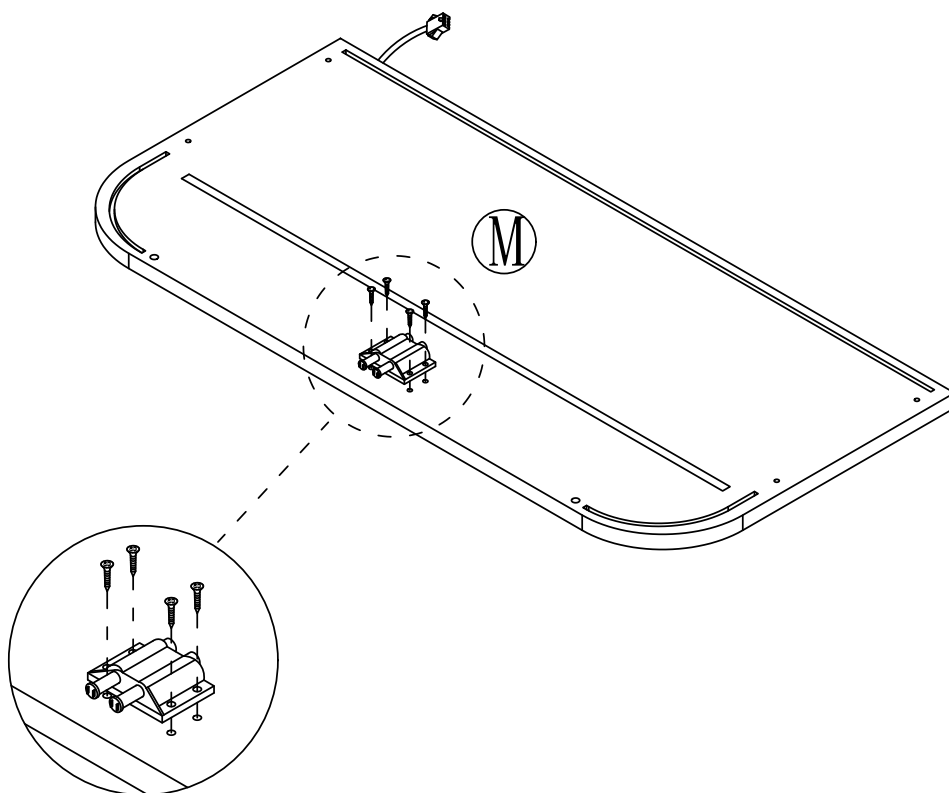

Step 17

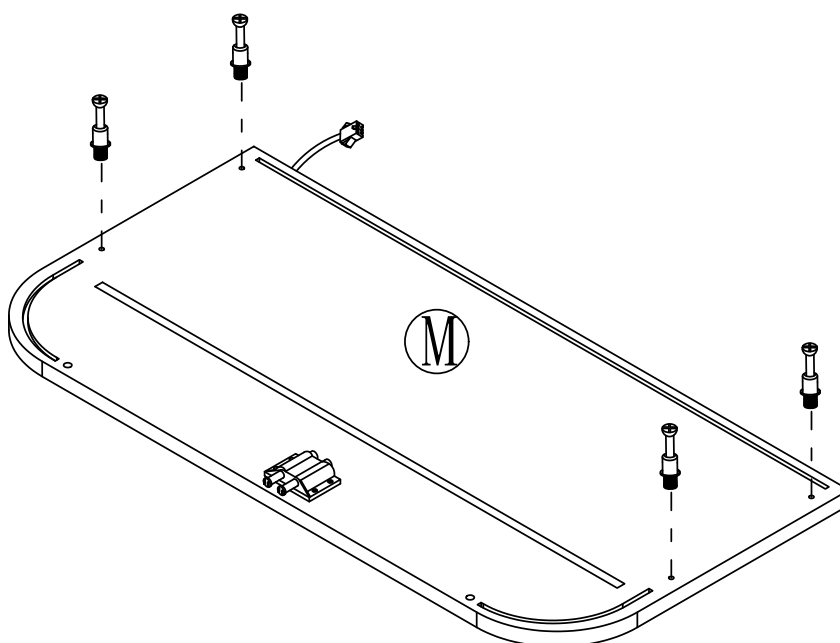


Step 18

2




x4

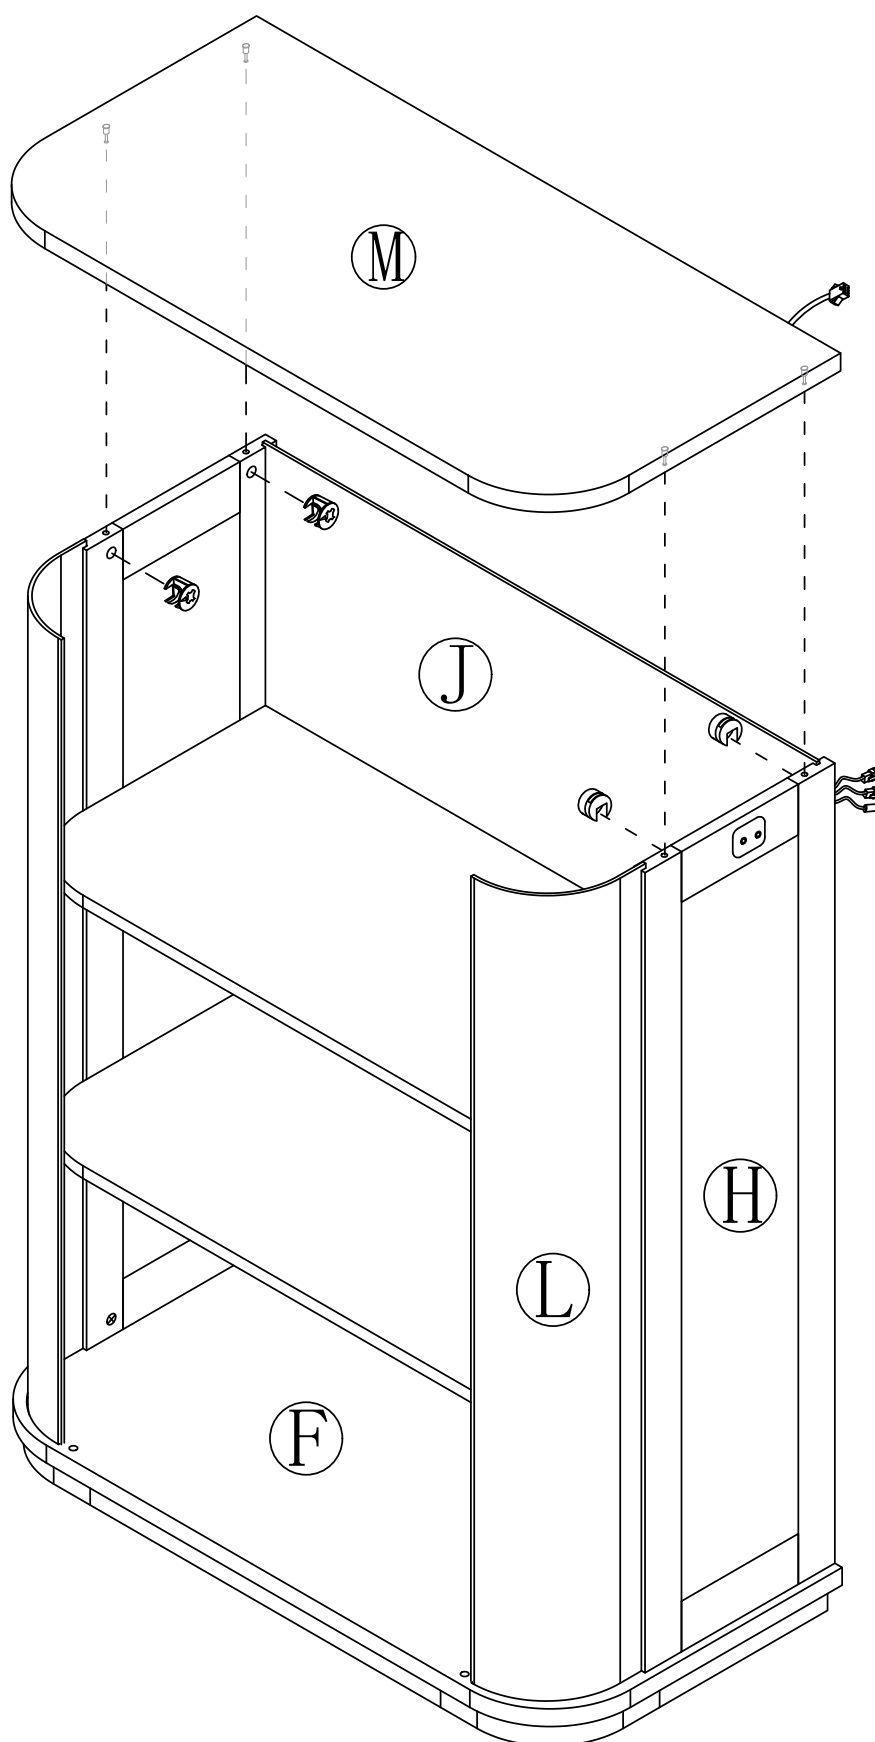


Step 19



⑤  x1

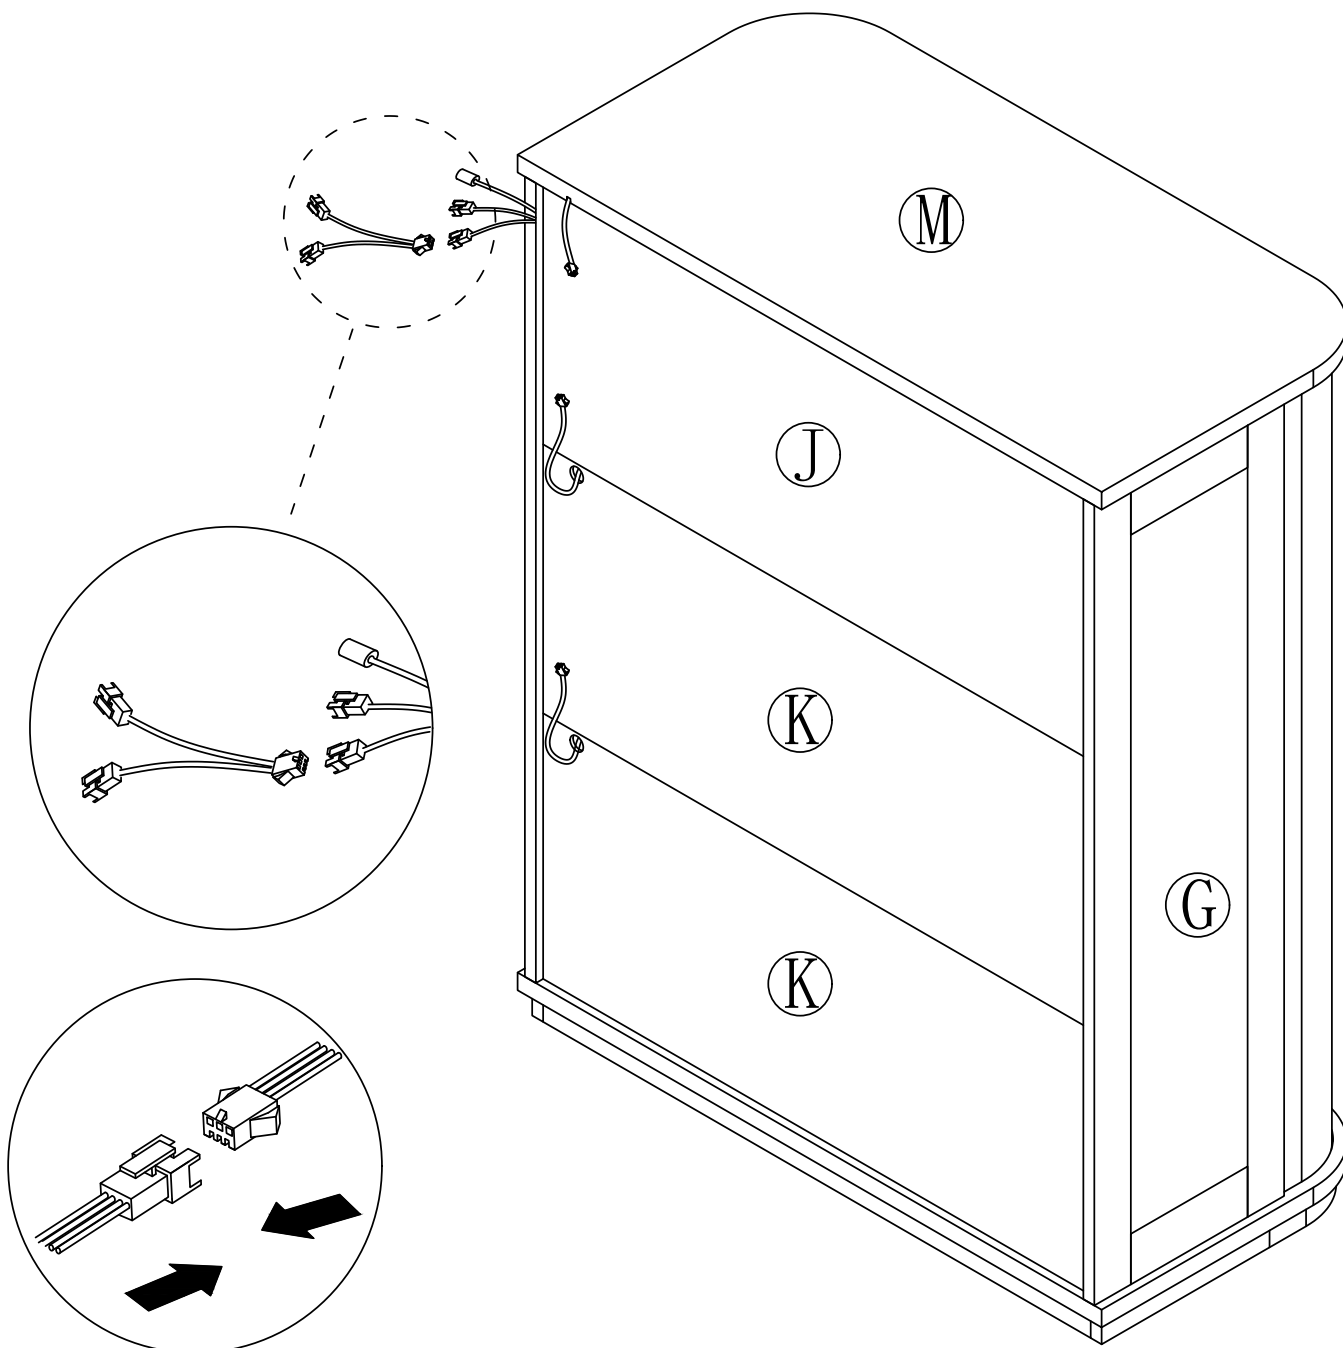


Step 20

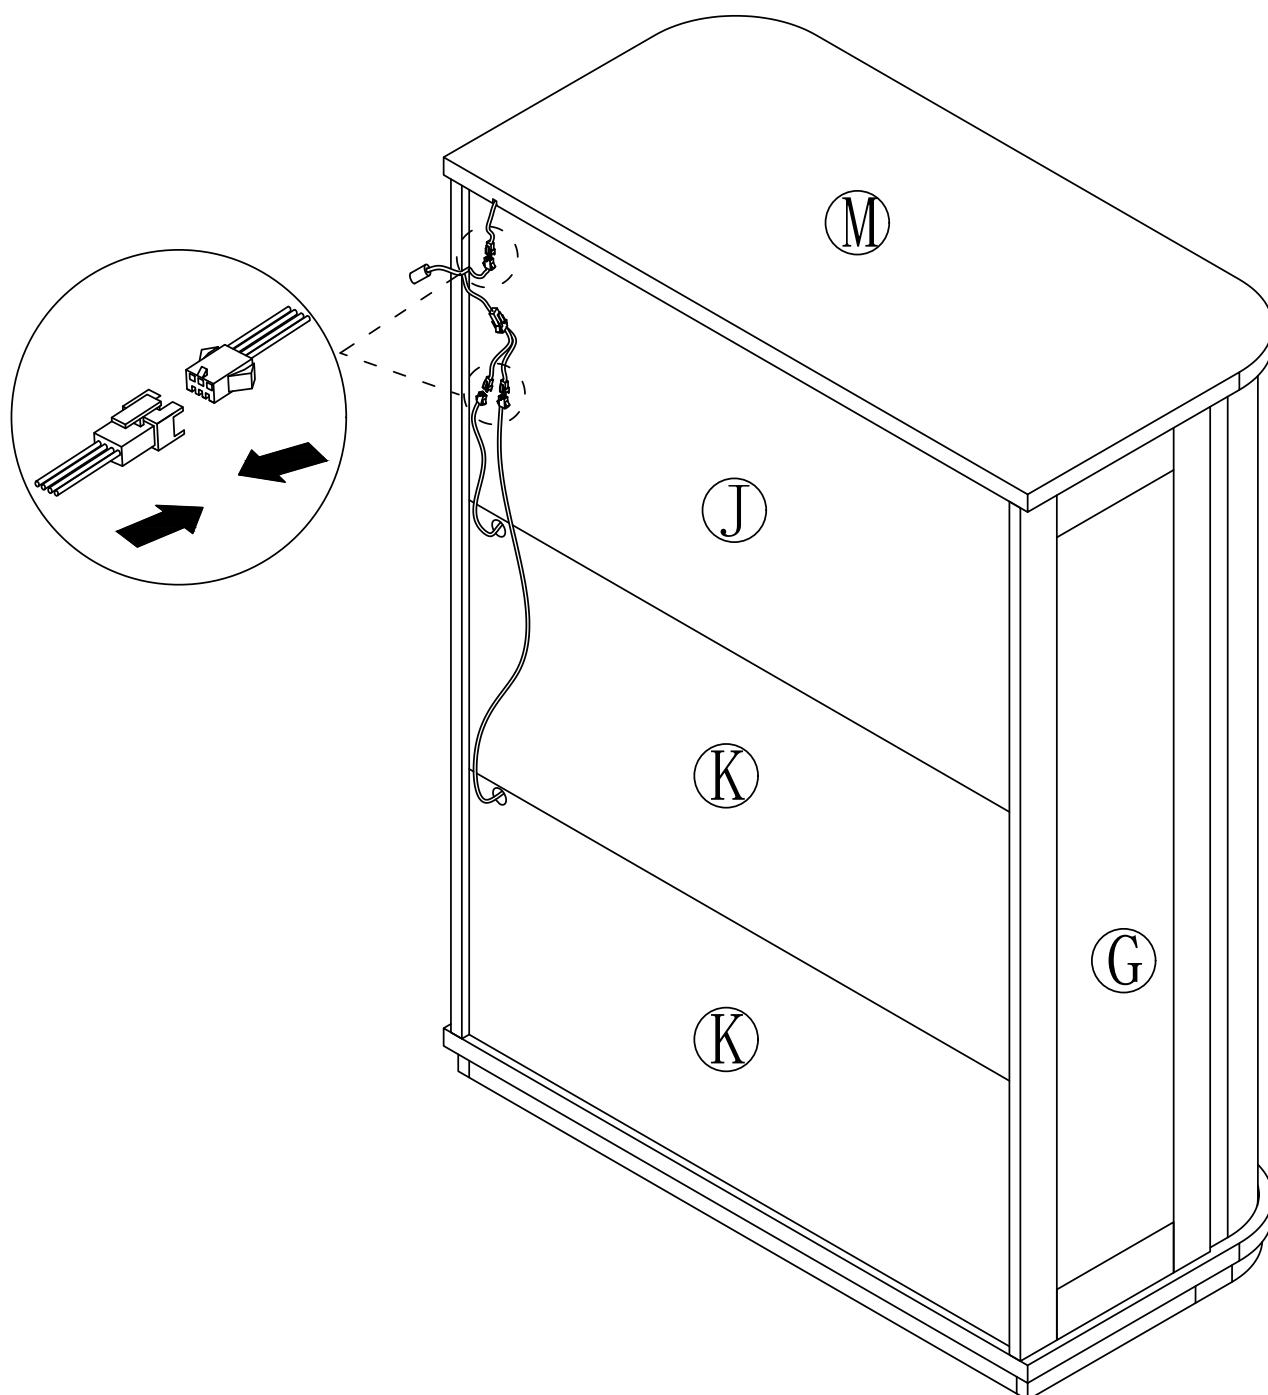


Step 21

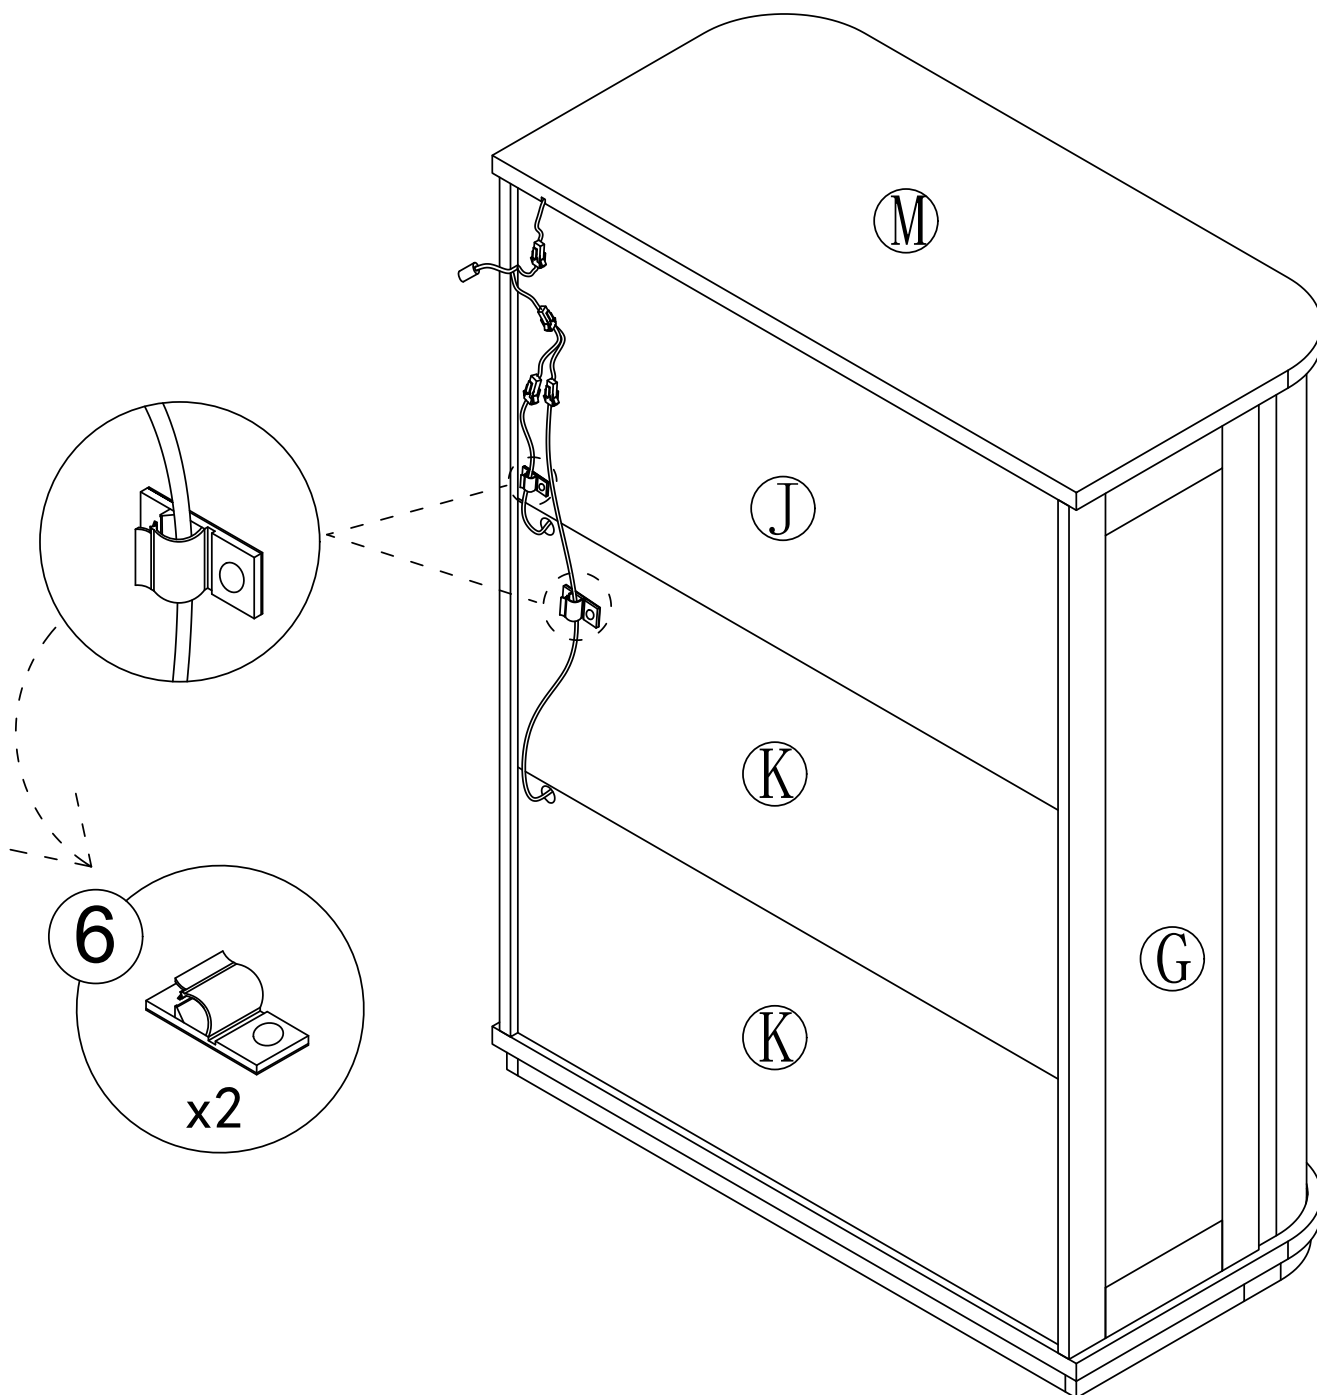


Step 22

7  x10

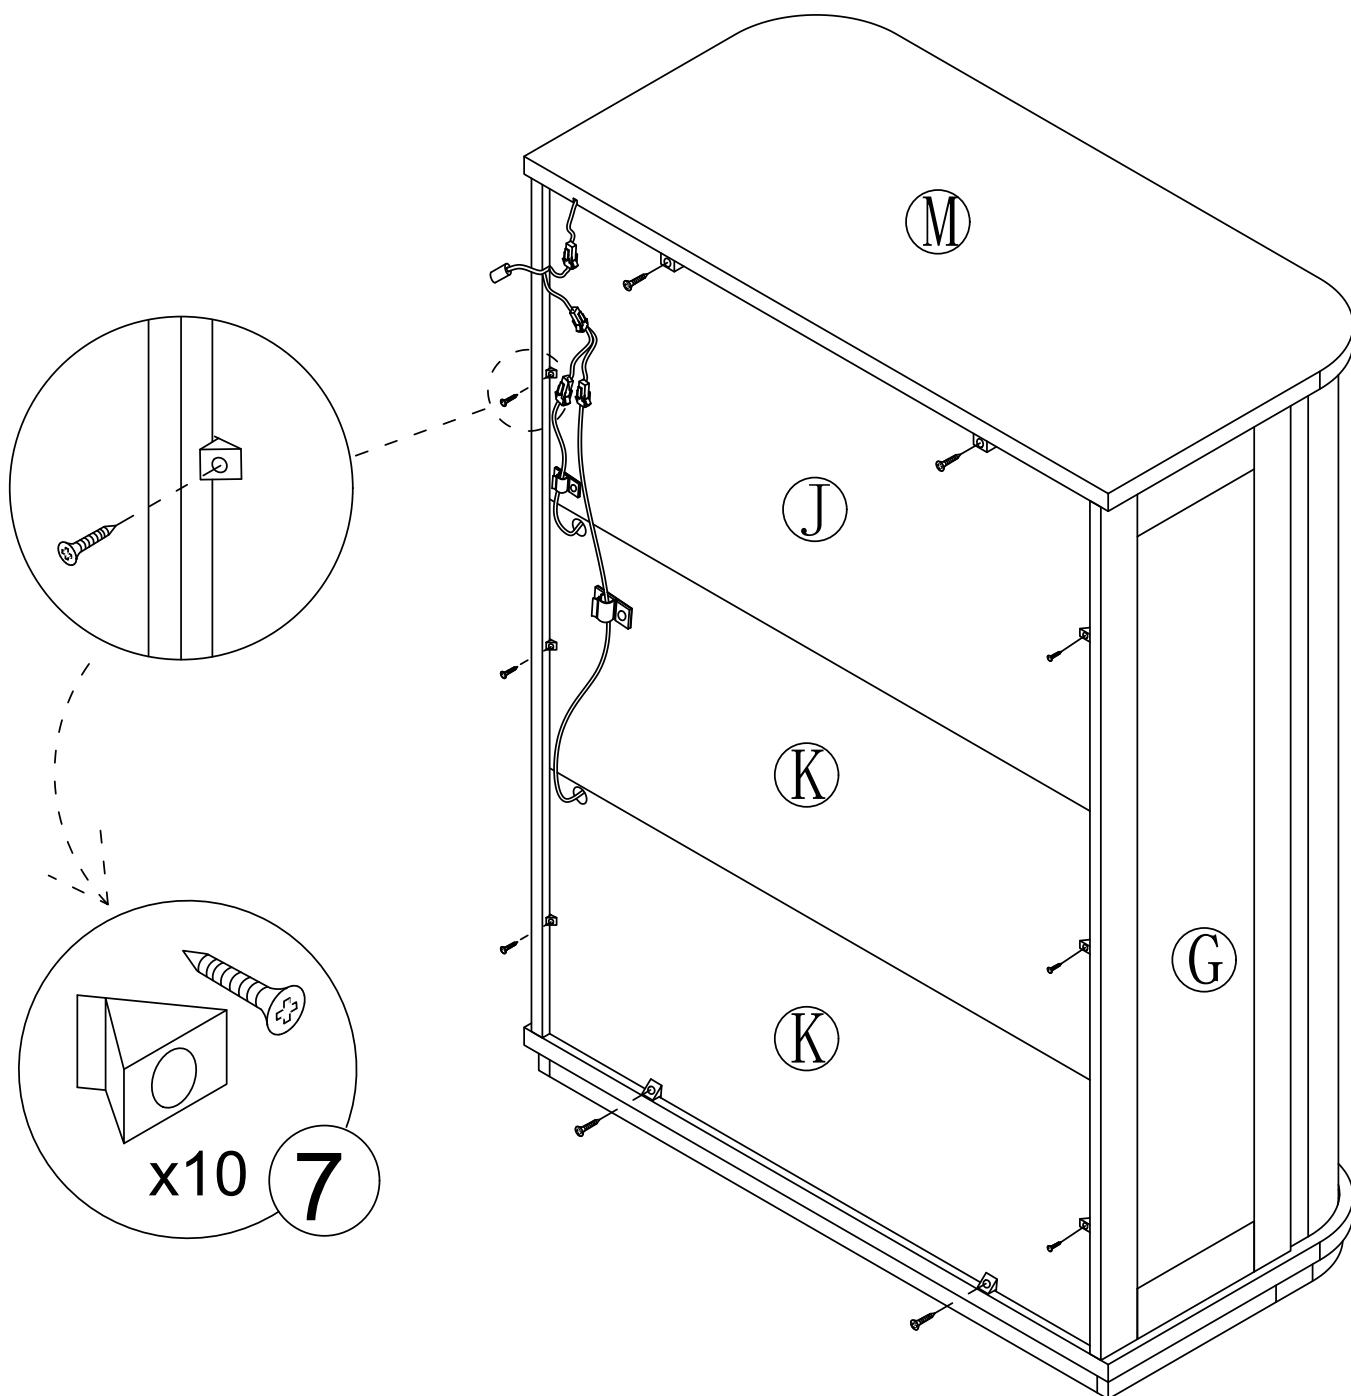


Step 23

8




x6

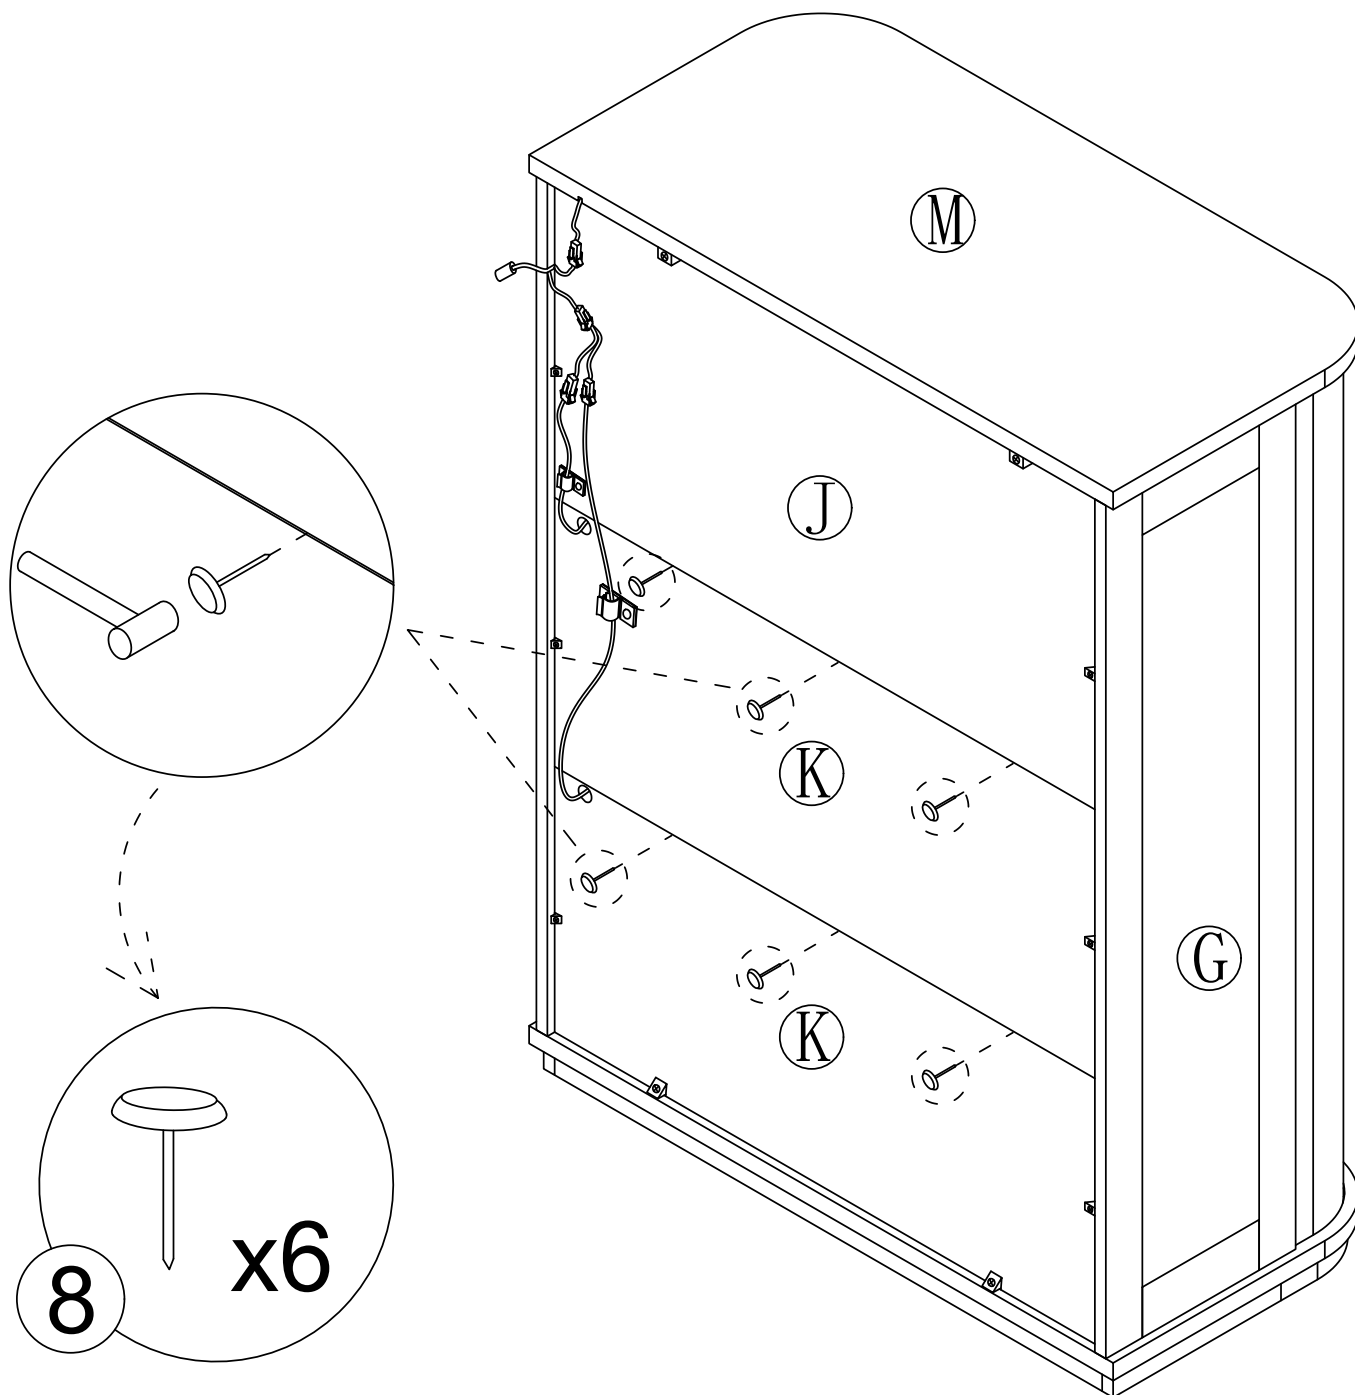


Step 24


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

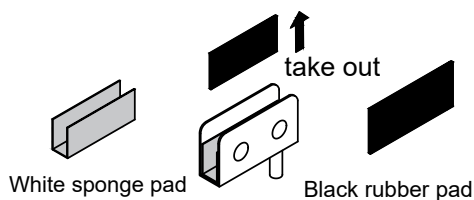


④



x1



x1


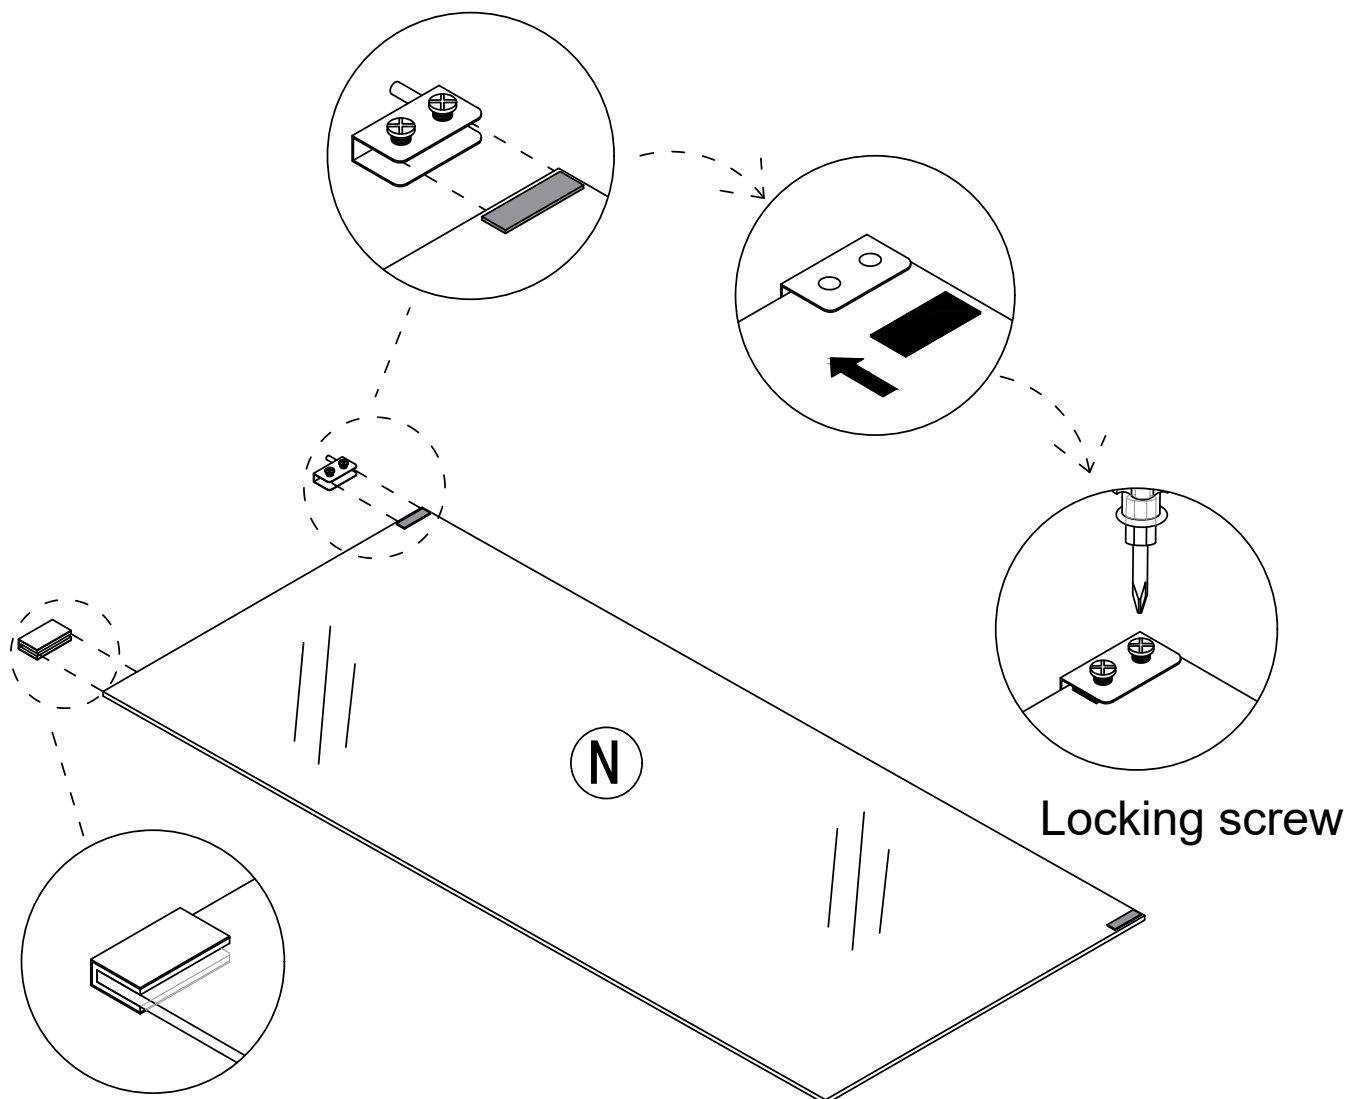


Locking screw

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed



Step 25

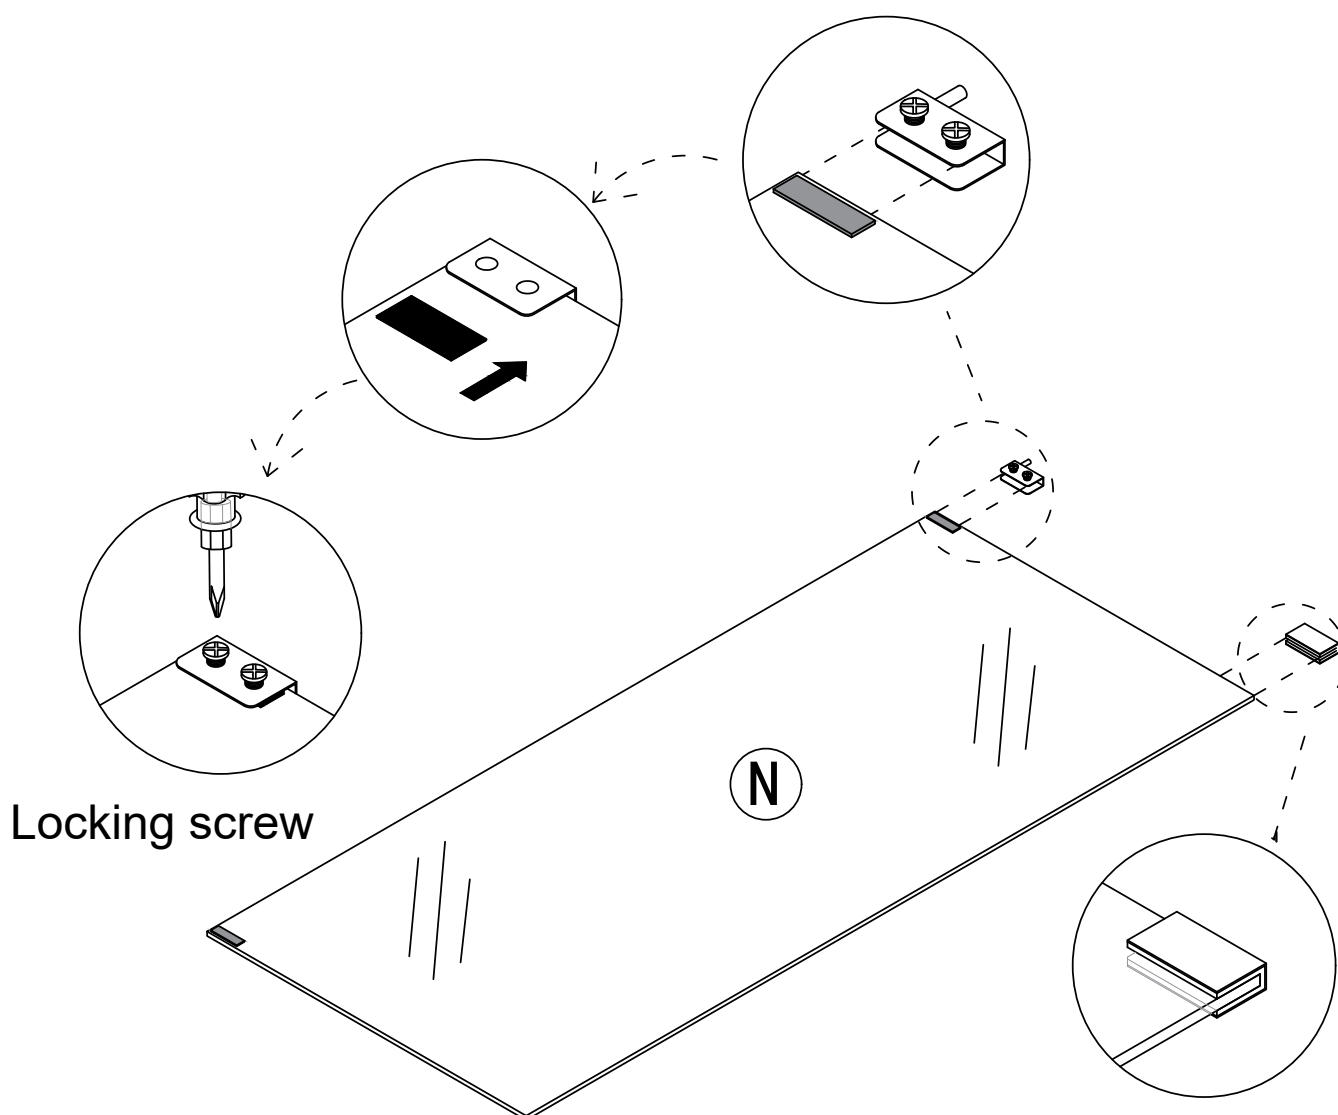

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 26

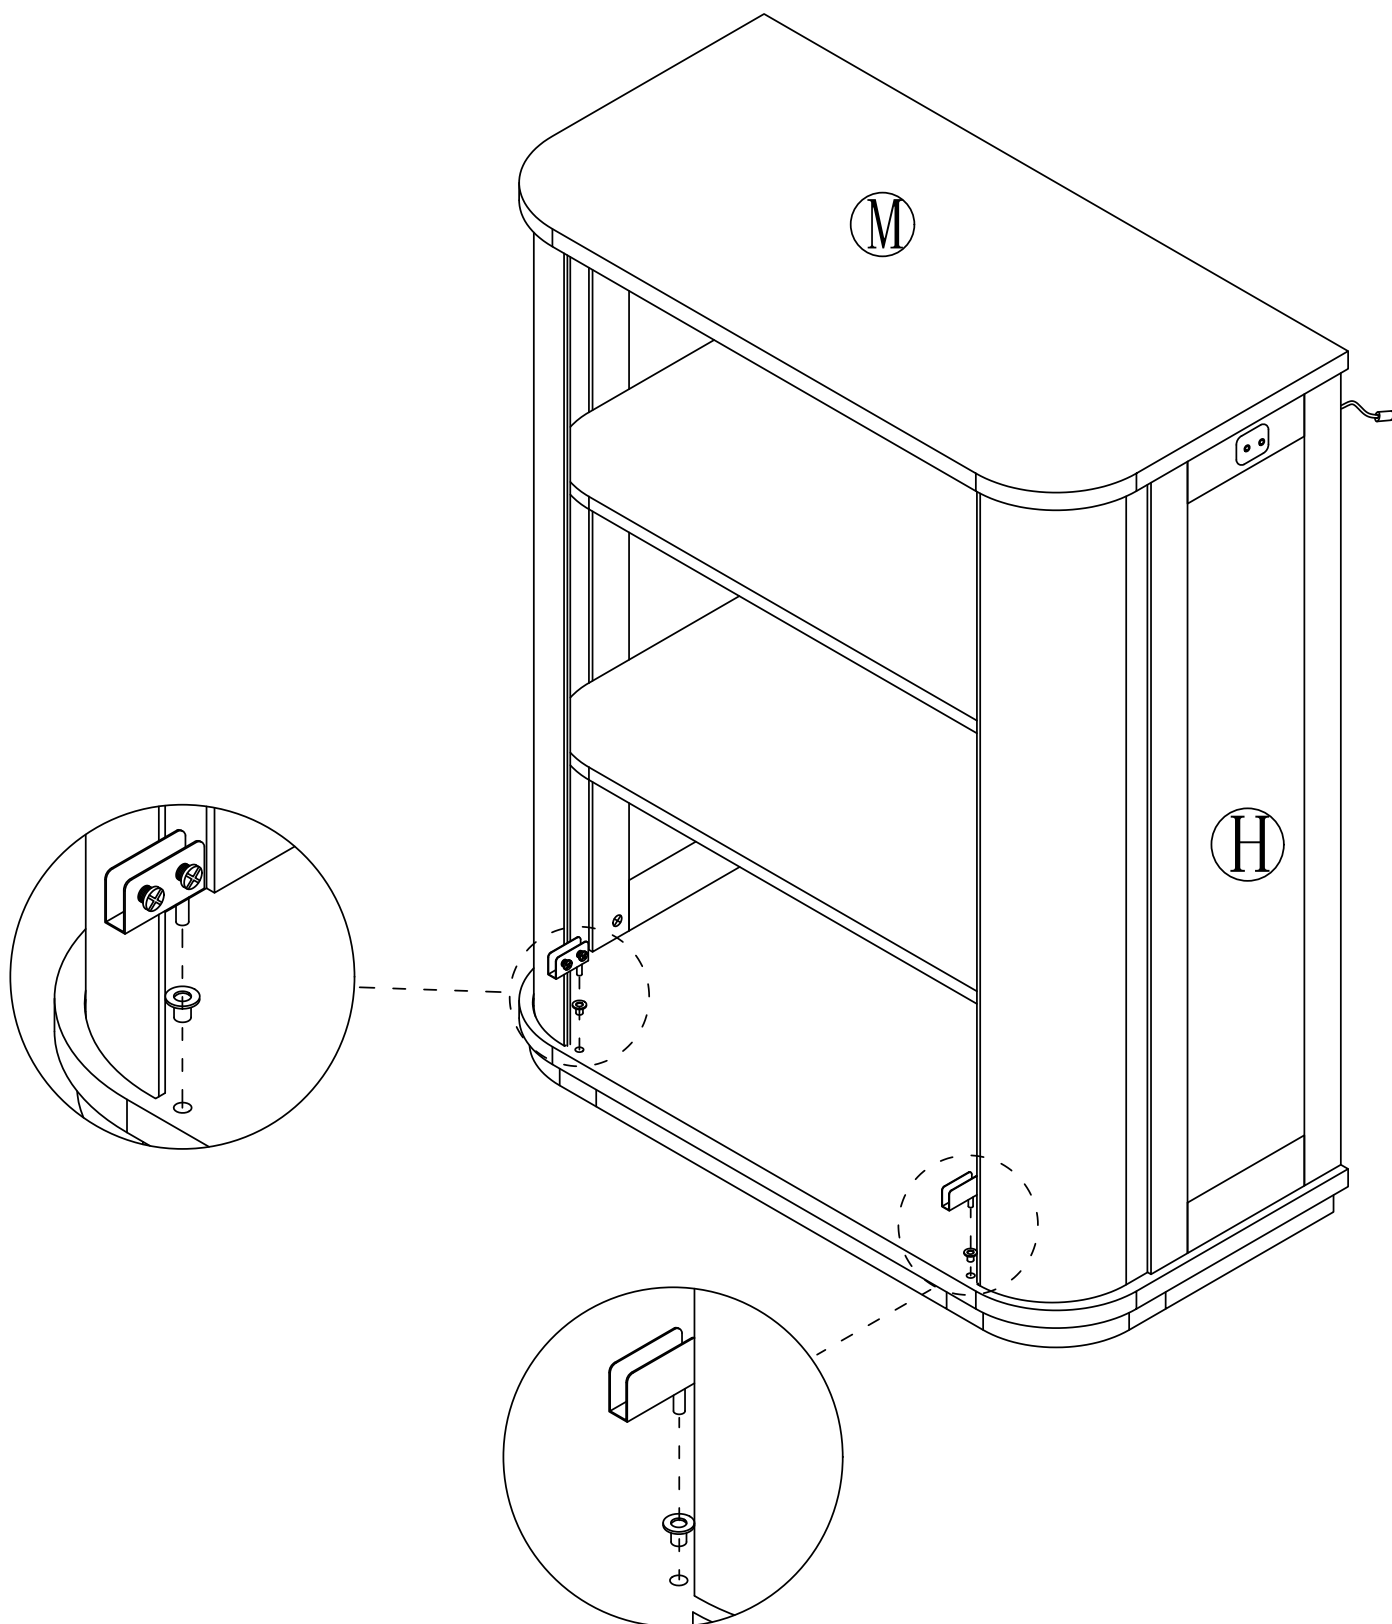

Step 27


Pay attention to the direction of the door hinge during installation

4




x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed




third

Locking screw

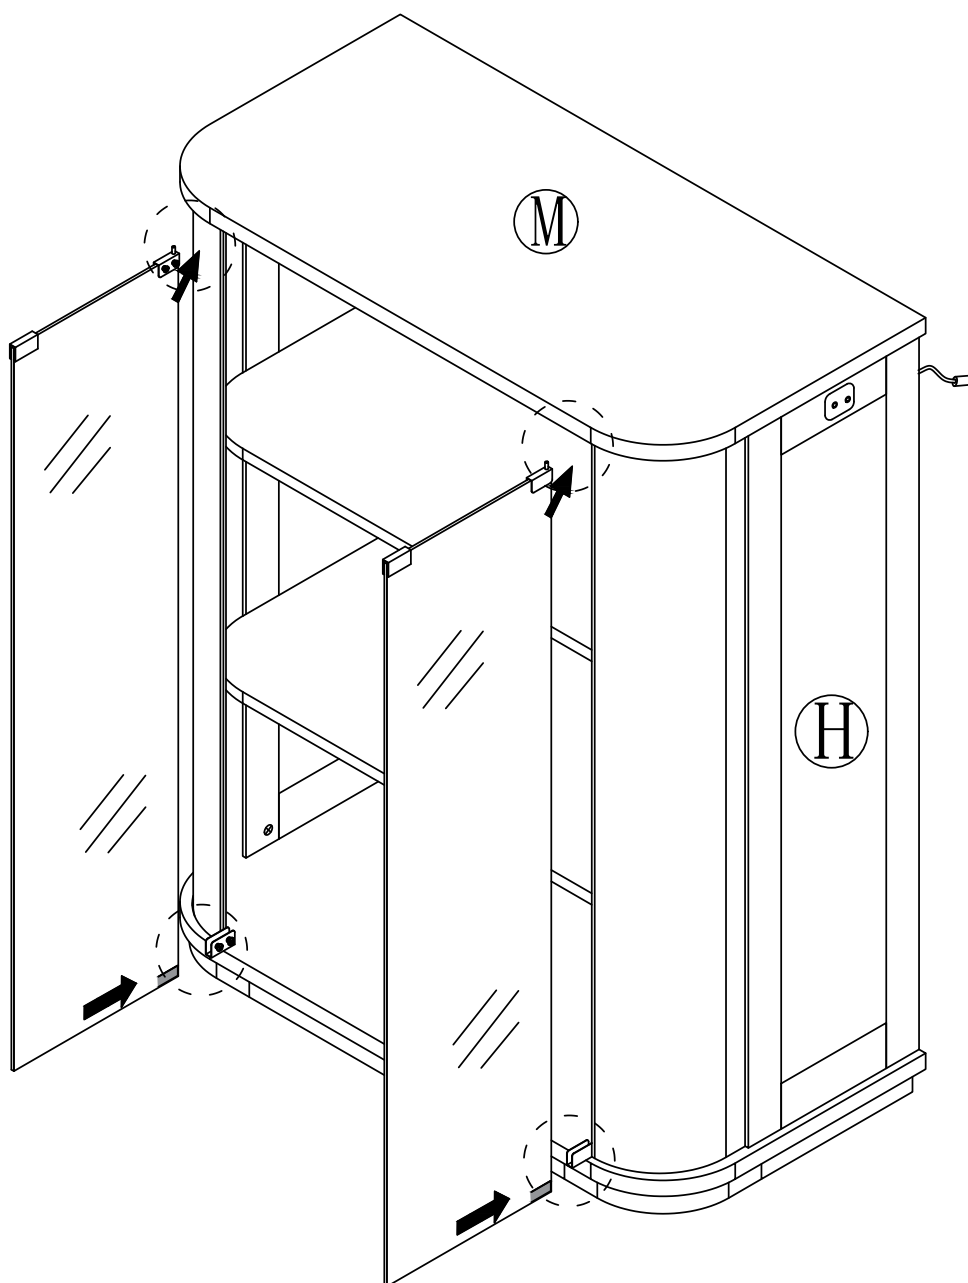


Step 28


The rebound device automatically opens and closes by pressing

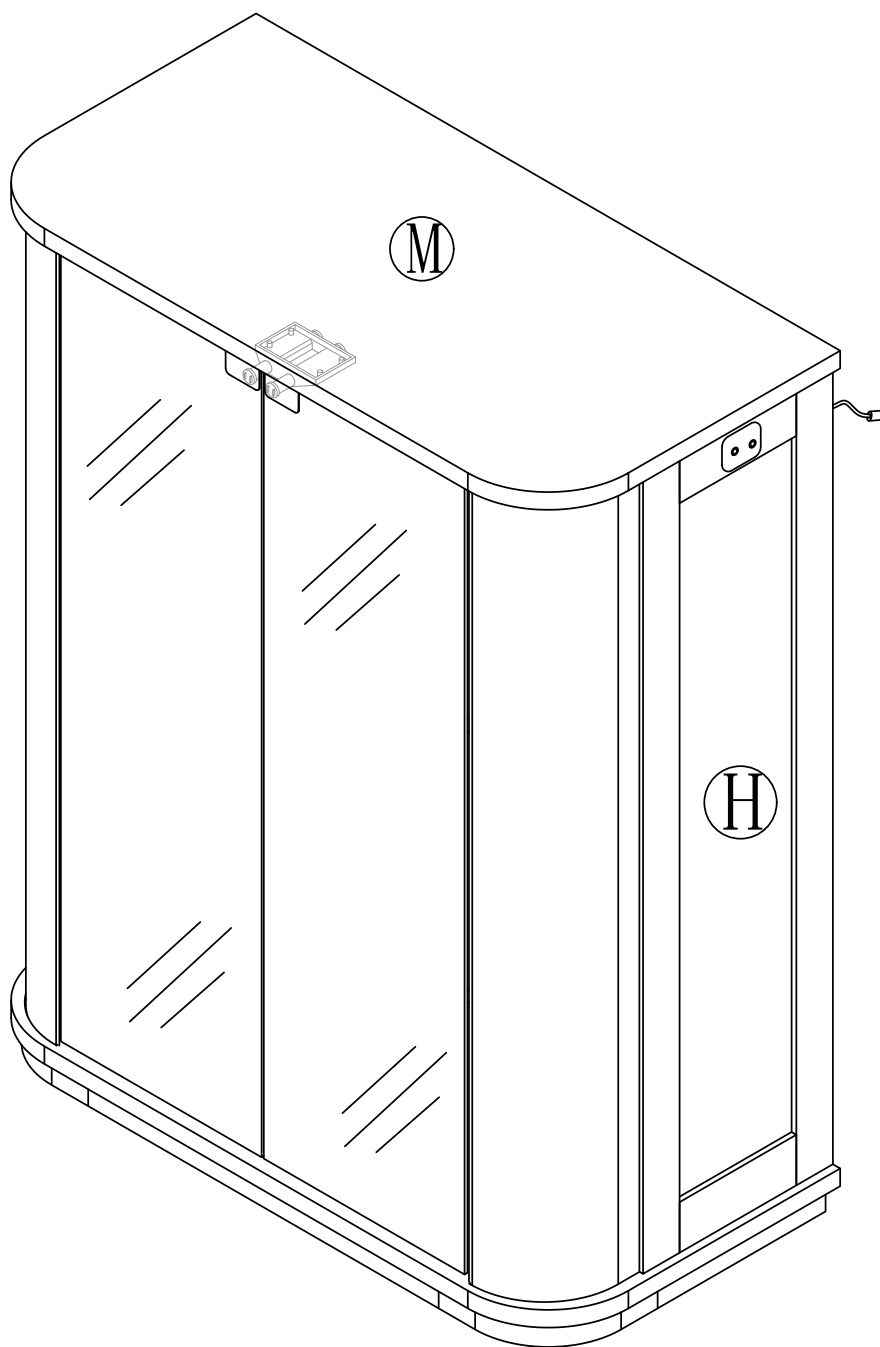



Open the glass door

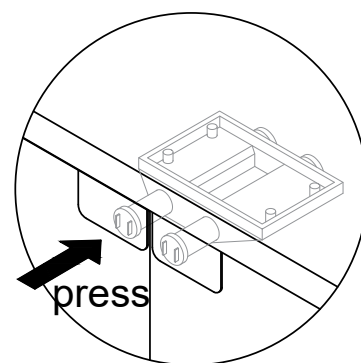

Close the glass door



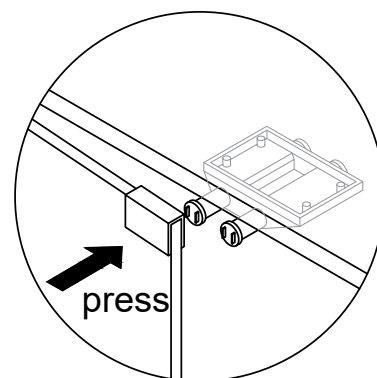


Step 29

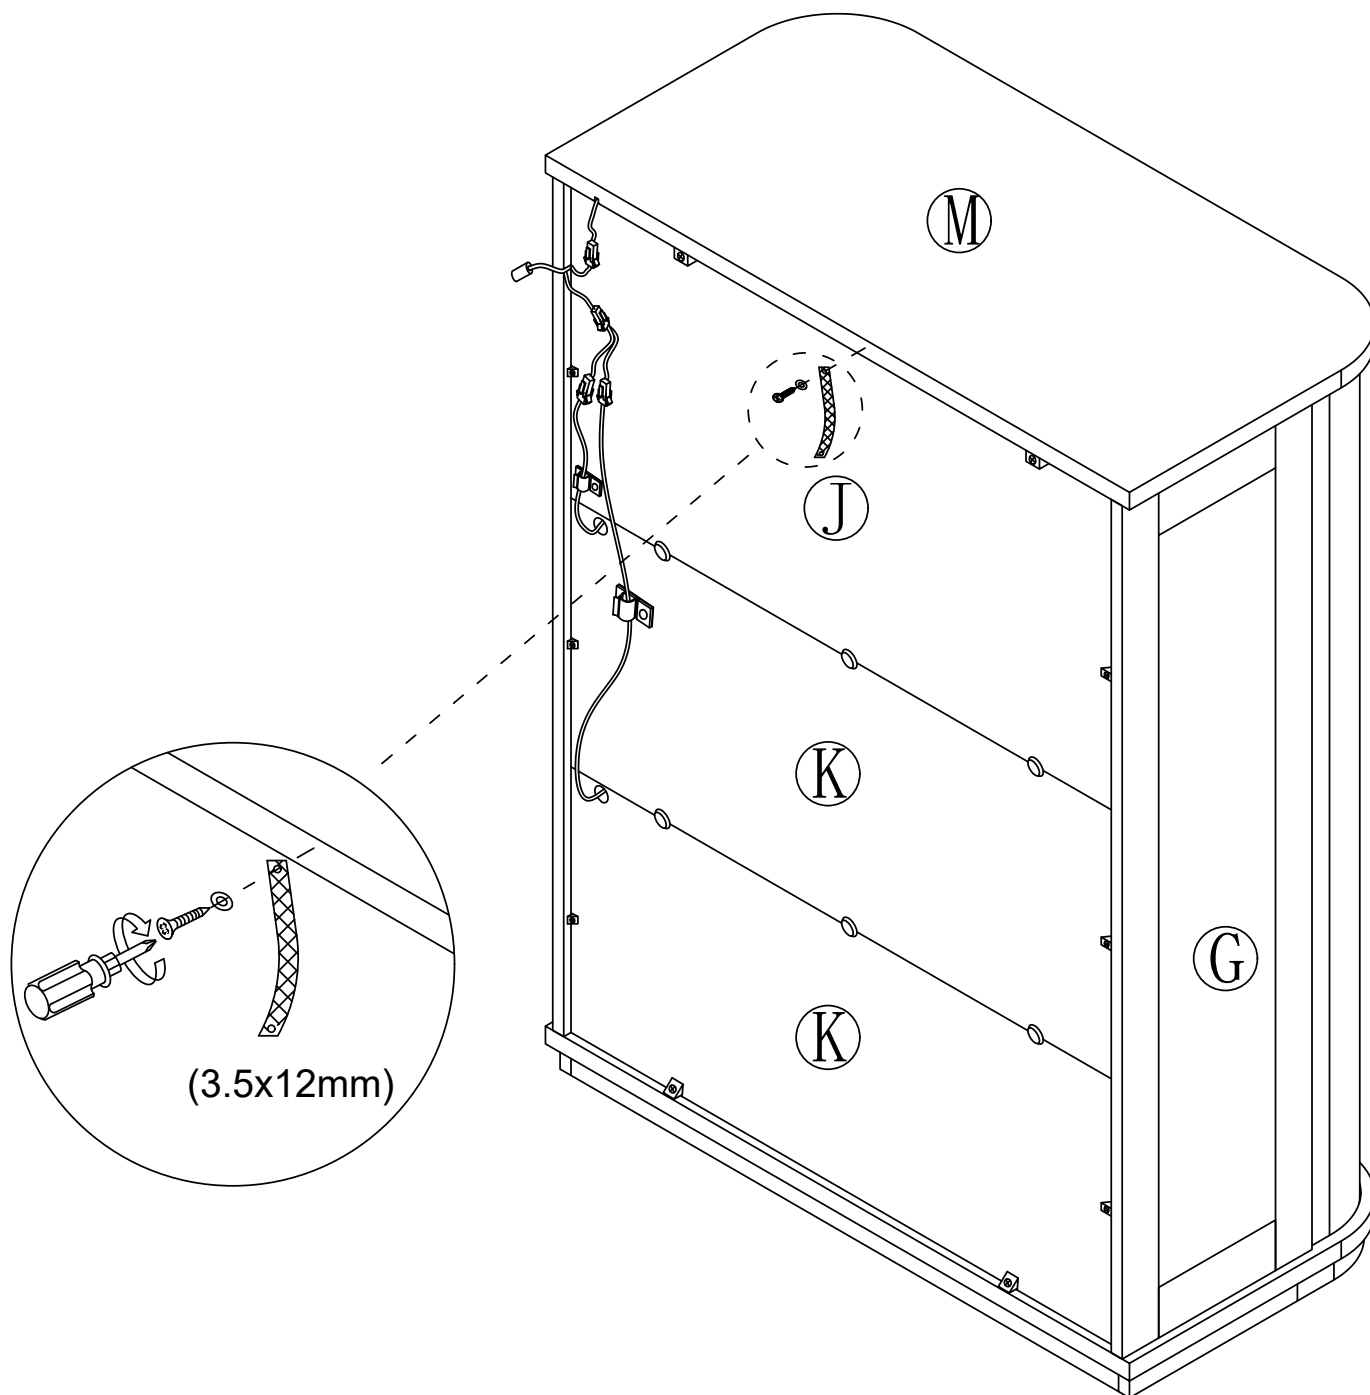

Step 30


Wall Mount

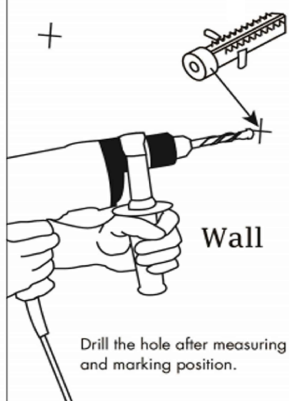


9



x1





x1




x1

wall


Fasten the cabinet to the wall

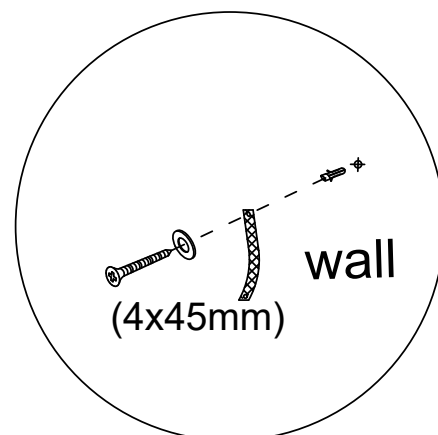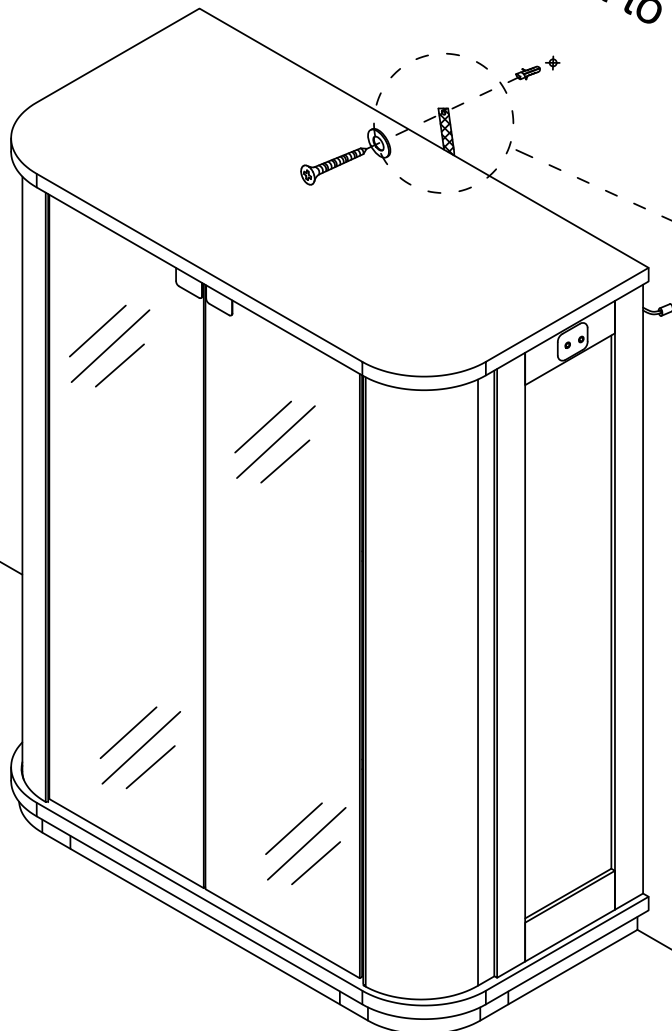

Step 31



x1

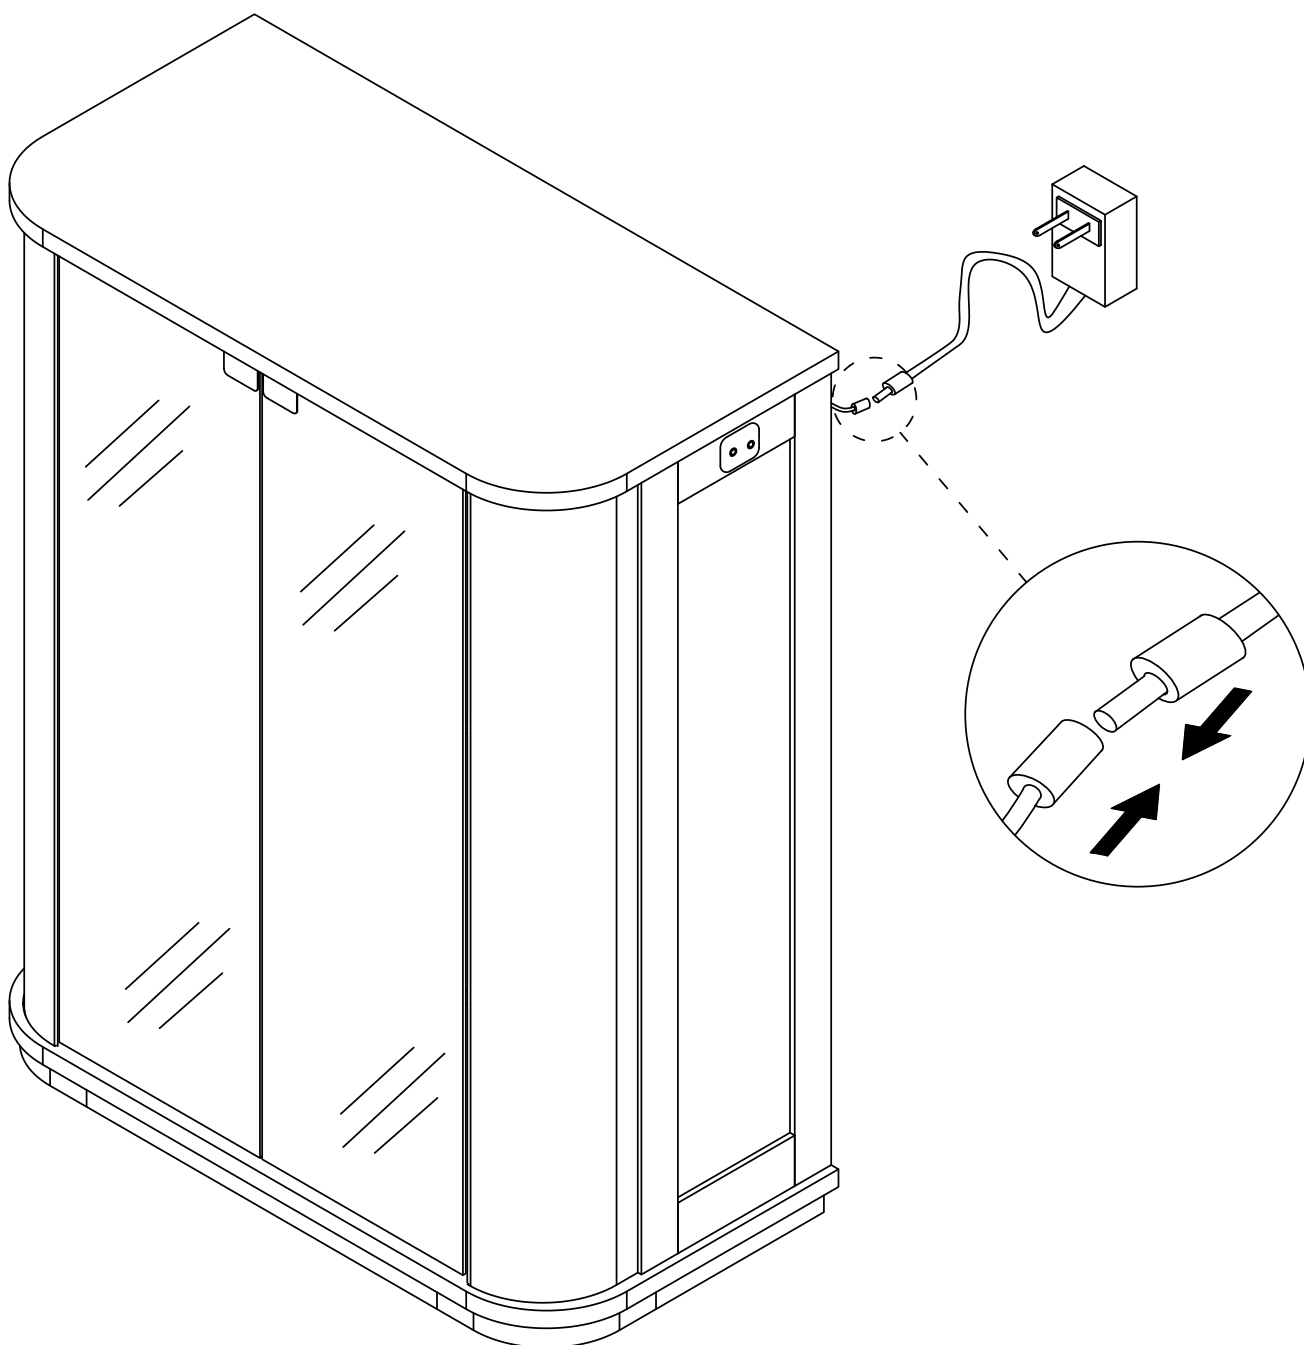


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

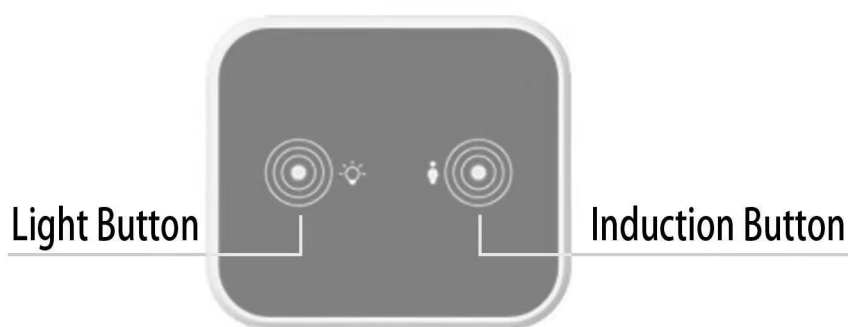

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.