NK30CB700W

30" Range Hood

SAMSUNG

Signature Features

Triple Air Sensor

• The Triple Air Sensor detects air quality and turns on or adjusts power levels to improve it.*

*In the event installation using recirculation kit impacts ventilation performance and Triple Air Sensor, opening a window to ventilate is recommended. Recirculation kit sold separately.

Powerful performance and Low noise

• Powerful 630 CFM* circulates air to remove odors quickly operating at 6.0 sones on boost fan speed setting.

*Adjustable downward to 390 CFM to accommodate different installation needs.

Wi-Fi Connectivity

• Control your hood by smartphone through the SmartThings app. Once your cooktop burner is powered on, the hood turns on.*

*Compatible when connected with Wi-Fi enabled built-in cooktops and ranges. Available when it is set using the "Automations" option in the SmartThings App.

Available Colors

Clean White Panel/
Stainless Steel Duct

Clean Grey Panel/
Stainless Steel Duct (shown)

Coming Summer 2023

Clean Deep Charcoal Panel/
Black Stainless Steel Duct

Clean White Panel/
Stainless Steel Duct

Clean Deep Charcoal Panel/
Black Stainless Steel Duct
Coming Summer 2023

Features

• Triple Air Sensor
• 53 dBA (1.0 sones) in low mode / 71 dBA (6.0 sones) in Boost mode
• 4 Fan Speeds, Including Booster
• LCD Display/Touch Controls
• Wall-Mount Chimney Style
• Exterior Venting & Recirculating Capabilities
• Optional Recirculation Kit Available
• Optional Extension Kit Available
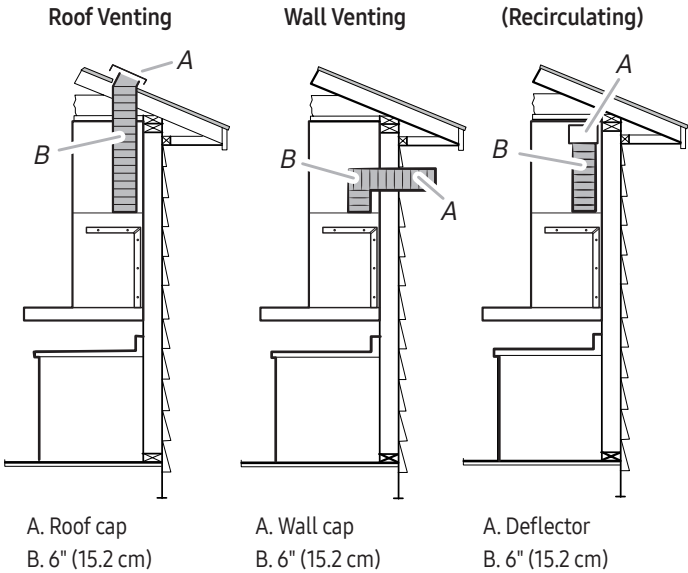
Convenience

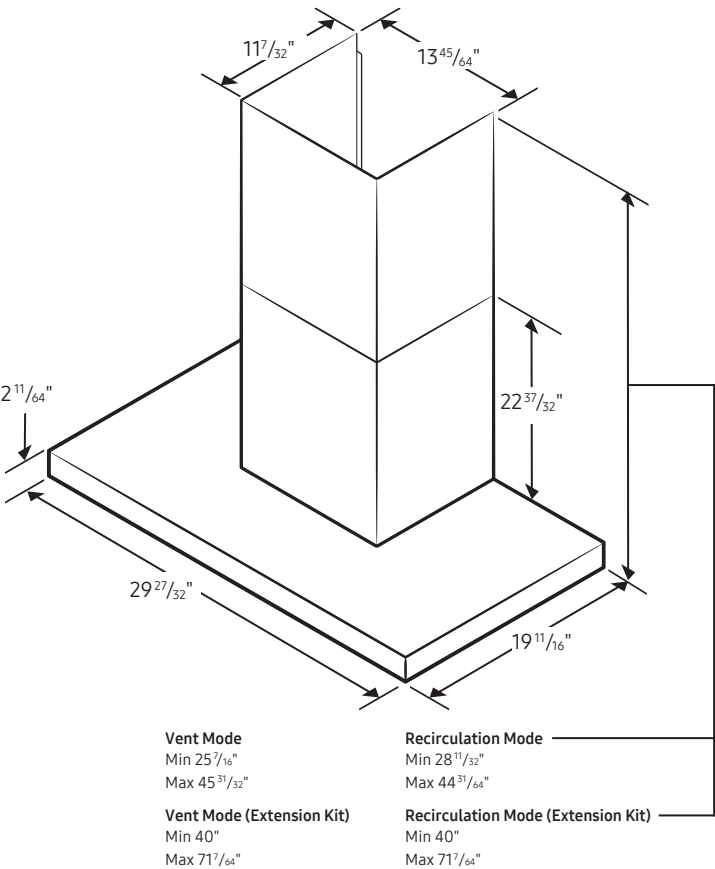• LED Bar Lighting

ADA Compliant

NK30CB700W

30" Range Hood

SAMSUNG

Venting Methods

Roof Venting	Wall Venting	(Recirculating)
A. Roof cap	A. Wall cap	A. Deflector
B. 6" (15.2 cm)	B. 6" (15.2 cm)	B. 6" (15.2 cm)

Dimensions and Clearance

* For Vented Installation
** For Non-Vented Recirculating Installation

11⁷/₃₂" 13⁴⁵/₆₄"

2¹¹/₆₄"

22³⁷/₃₂"

29²⁷/₃₂"

19¹¹/₁₆"

Vent Mode
Min 25⁷/₁₆"
Max 45³¹/₃₂"

Recirculation Mode
Min 28¹¹/₃₂"
Max 44³¹/₆₄"

Vent Mode (Extension Kit)
Min 40"
Max 71⁷/₆₄"

Recirculation Mode (Extension Kit)
Min 40"
Max 71⁷/₆₄"

Total Power
210W

Power Source
120V / 60 Hz / 15A

Range Hood
• 30" Wall-Mount Chimney Style Hood
• Vent Fan: 630 CFM (adjustable downwards to 390 CFM)
• 53 dBA (1.0 sones) in low mode / 71 dBA (6.0 sones) in Boost mode
• 4 Fan Speeds, Including Booster
• LCD Display/Touch Controls
• SmartThings App Automation: Cooktop/Range connectivity, lighting On/Off, Fan Speed
• Mobile Monitoring: Fan Speed, Lighting On/Off, Power Control
• Voice Control: Bixby/Google Asistant/Amazon Alexa
• Removable Baffle Filters (Dishwasher safe)
• LED Bar Lighting

Warranty
Two (2) Years Parts and Labor*
*Effective for purchases made between 3/1/23 - 9/30/23; proof of purchase required.

Product Dimensions & Weight (WxHxD)
Outside (Max) Hood Dimensions:
29²⁷/₃₂" x 25⁷/₁₆" x 19¹¹/₁₆"
Weight: 35.7 lbs

Shipping Dimensions & Weight (WxHxD)
Dimensions:
33³/₁₆" x 25²⁵/₃₂" x 19¹¹/₁₆"
Weight: 59.5 lbs

Color	Model #	UPC Code
Clean White Panel/ Stainless Steel Duct	NK30CB700W12AA	887276724201
Clean Grey Panel/ Stainless Steel Duct	NK30CB700WCGAA	887276724225
Clean Deep Charcoal Panel/Black Stainless Steel Duct	NK30CB700W33AA	887276724218

Optional Accessories

Stainless Steel Hood Extension Kit	NK-AE7000WS	887276749662
Black Stainless Steel Hood Extension Kit	NK-AE7000WG	887276749655
Recirculation Kit	NK-AR7000WB	887276749686
Recirculation Filter	NK-AF7000WB	887276749679