

ITEM #: RV-W144822

Kira
Home

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!


Email: help@kira-home.com

Facebook/Instagram: @KiraHomeDecor

Phone: 888.208.2085

INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided.
2. Place Backplate (E) against the wall by inserting Nipple (D) through the appropriate hole located on Backplate (E). Adjust Nipple (D) and hex nuts until 1/4' of the threaded portion is visible. Remove the fixture from the wall and set it aside.
Note: If 1/4" of Nipple (D) is not visible, remove Backplate (E) and re-adjust Nipple (D) to proper length.
3. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

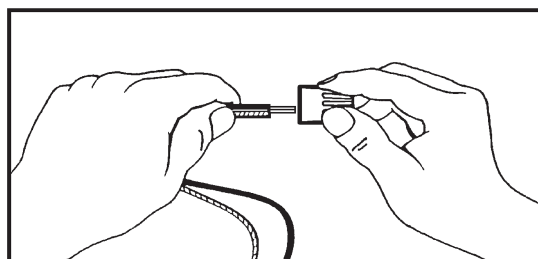

Connect to BLACK house wire	Connect to WHITE house wire
BLACK 	WHITE
PARALLEL WIRE (ROUND & SMOOTH) 	PARALLEL WIRE (RIBBED / RIDGED)
WHITE OR GREY WITH TRACER 	WHITE OR GREY WITHOUT TRACER
BROWN, GOLD OR BLACK WITHOUT TRACER 	BROWN, GOLD OR BLACK WITH TRACER

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

4. Place all wires and Wire Connectors (C) back into the junction box.
 5. Place Backplate (E) against the wall, ensuring Nipple (D) is protruding through the holes in Backplate (E). Secure the fixture in place to the Mounting Plate (A) with Decorative Cap (F).
Note: If the fixture doesn't sit flush against the ceiling, readjust Nipple (D).
 6. Secure Shades (I) to Sockets (G) with Socket Rings (H).
Note: Socket Rings (H) should already be attached to Sockets (G). Remove Socket Rings (H) prior to installing Shades (I).
 7. Install light bulb (not included) into Sockets (G).
- Enjoy your new fixture!

Kira Home

ITEM #: RV-W144822 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Ladder, Measuring Tape

