

Specification Sheet

Features

- 30 LED Color Temperature Lights with Dimmable touch control
- Mirrored interior with 3 layers adjustable glass shelves
- Includes Digital Clock
- Includes Defogger with push button
- Includes two outlets
- Includes an adjustable makeup mirror
- Includes installation hardware for recess mounting
- Can be recessed or surface mounted
(surface mounting is included)
- Interior Light with sensor switch
- Energy efficient LED lighting:

Kelvin	3000	6500	4500 mixed color
CRI	80+ -	80+ -	80+ -
Lumens*t	810 -	810 -	1620 -
R9 Value*	50+ -	50+ -	50+ -
Watts (AC)	60	60	60
Lumens per Watt	90	90	90

Construction

- Grey aluminum body and door frame
- 3 mirror design - rear of cabinet and both sides of door
- Concealed finger pull-door edge
- Two pieces OTC self-closing hinges for each door ,
both side door open 155°,middle door open 90°
- Adjustable shelving at 2 1/3" (60 mm) increments
- Single field wire into electrical shelf - Front access serviceability

Codes/Standards Applicable

Electric Option Models are ETL certified to:



- UL 962
- CSA Standard C22.2 No. 68

Dimensions

Height: 30" (762 mm)

Width: 40" (1016 mm)

Depth: 5" (127 mm) When surface mounted
1" (25 mm) When recessed

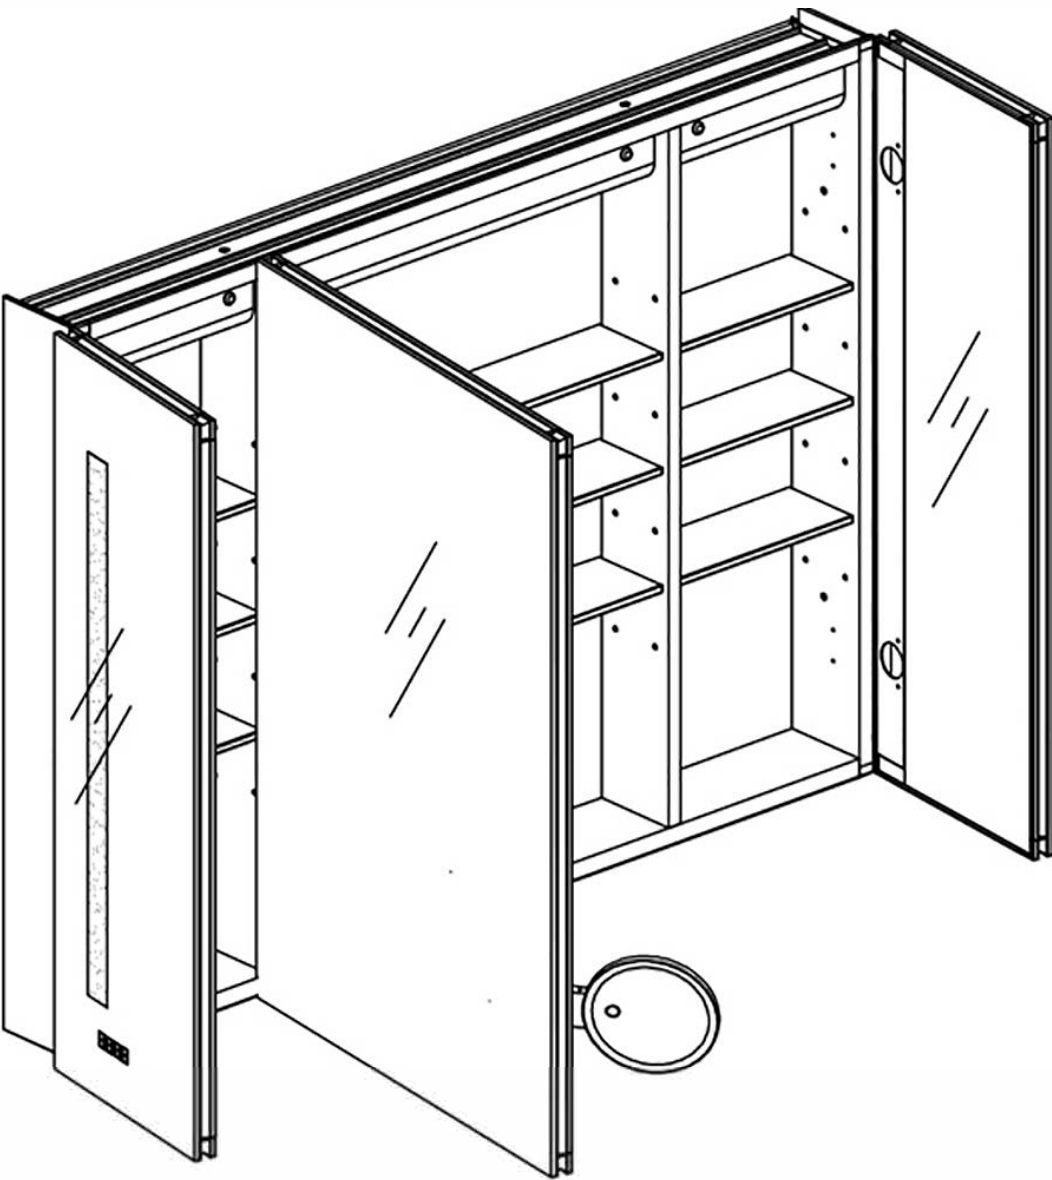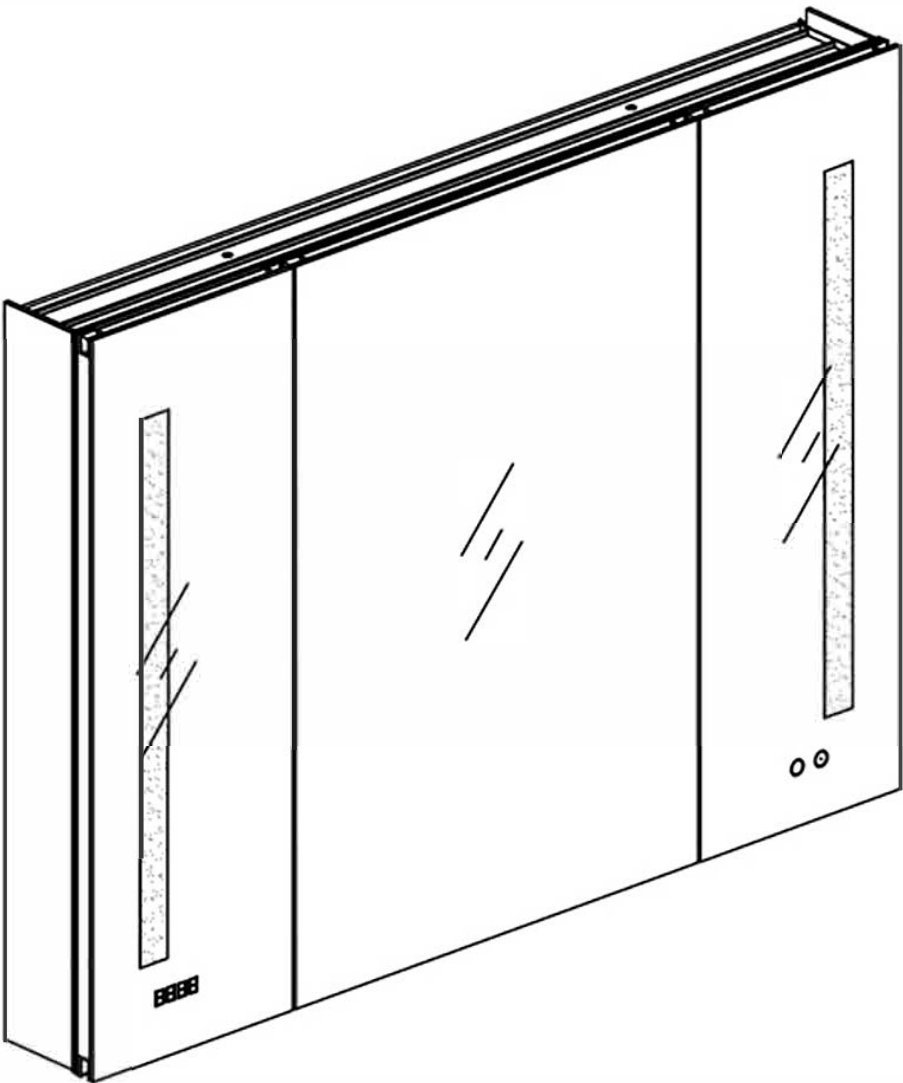


Installation Options


- Recessed Mount - Rough Opening - 29-1/2" H x 39-1/2" W x 4" D (749mm H x 1003mm W x 102mm D)
- Surface Mount - Surface Mount Kit is included

Electrical System


- 60 Watts LED Driver
- INPUT : 120VAC 60HZ 1.2A
- OUTPUT: 12VAC 5.0A
- Field wire location as shown in drawing
- 1/2" conduit (0 7/8" actual) electrical knockout location shown below
- Included field wire cable clamp
- Circuit Diagram

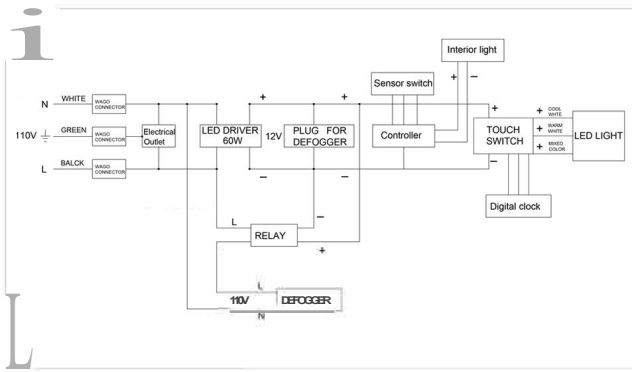

Circuit Diagram

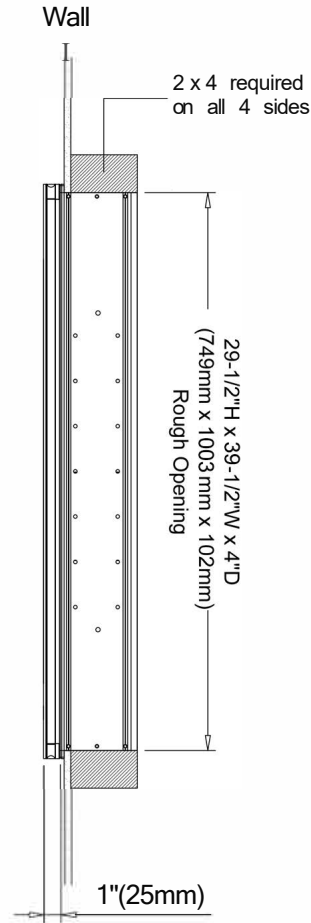


Recessed Mount

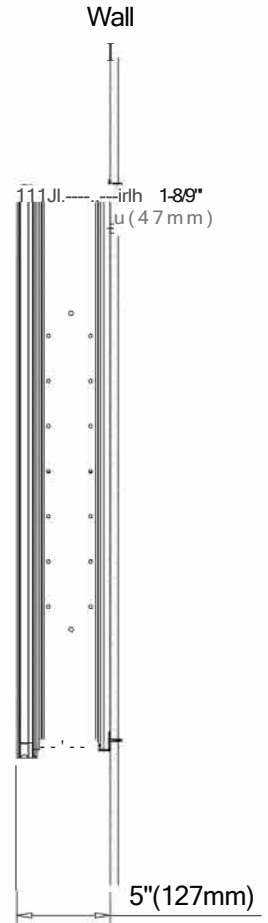


Surface Mount


r 40" (1016mm) **7** **r** 39-1/2" (1003mm) **7**

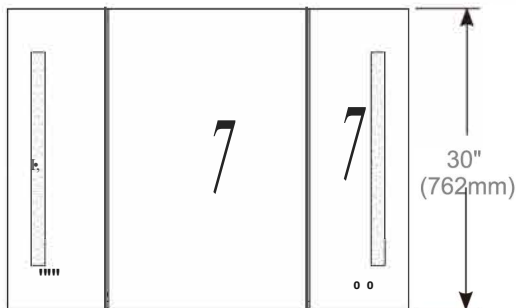

Cabinet Dimensions

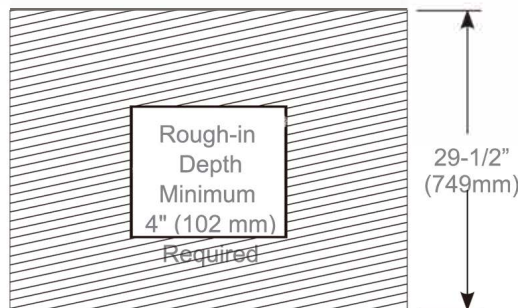

Rough-in Dimensions

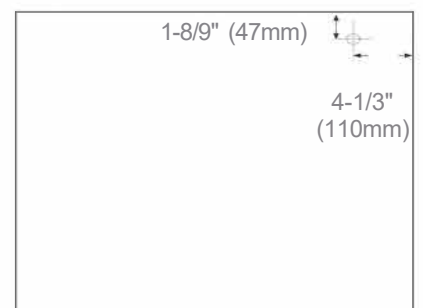

Back of Cabinet - Wire Access Location