


ASSEMBLY INSTRUCTIONS



P63-3S

TWO PERSON ASSEMBLY

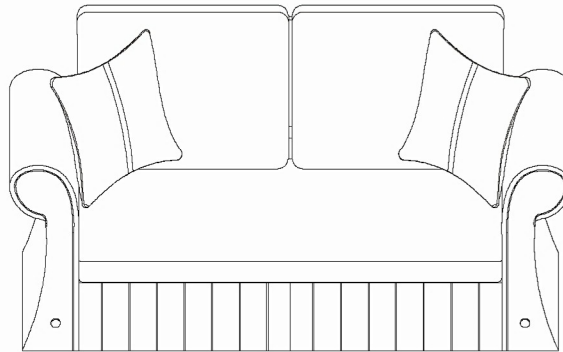

Attention:*Plesae do not move the sofa after installation.If you need to move the sofa,please disassemble the sofa first,and re-install it at your destination.

***Please keep this installation instruction for your future use.**

Package

A



Right Sofa
Armrest
1PCS

B



Left Sofa
Armrest
1PCS

C



Backrestiron
Frame
2PCS

D



Right Front
Baffle
1PCS

E



Bolt (25mm)
8PCS

F




Allen hey
1PCS

G



Corner Code
2PCS

H



Bracket
2PCS

I




Legs
4PCS

J




Connector
Board
1PCS

K



Seat Board
2PCS

L



Compressed
Seat Bag
1PCS

M



Seat Bag Cover
1PCS

N



Cushion
2PCS

O



Connecting
Stick
2PCS

P



Bolt (30mm)
8PCS

Q



Bolt (50mm)
8PCS

R



Backrest
Cloth Cover
1PCS

S




Left Front
Baffle
1PCS

T




Back Cushion
2PCS


STEP1

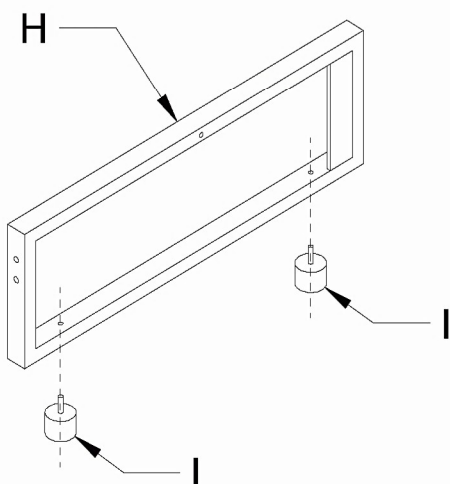


STEP2

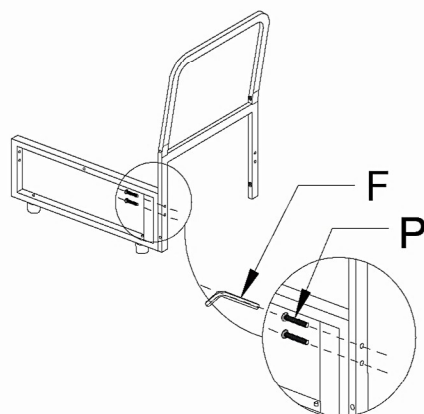


STEP3

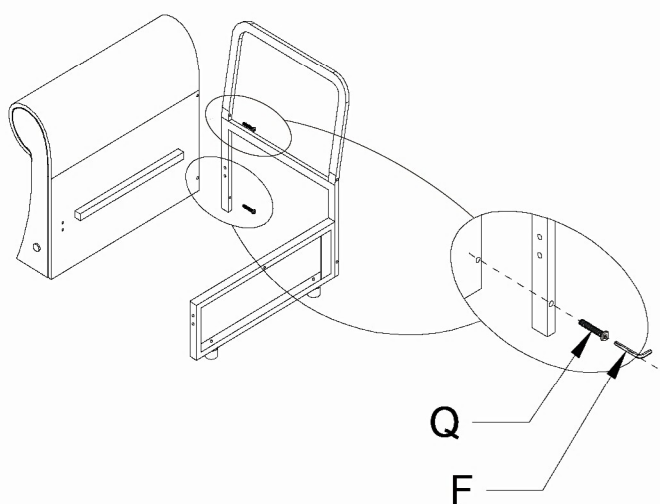

STEP4

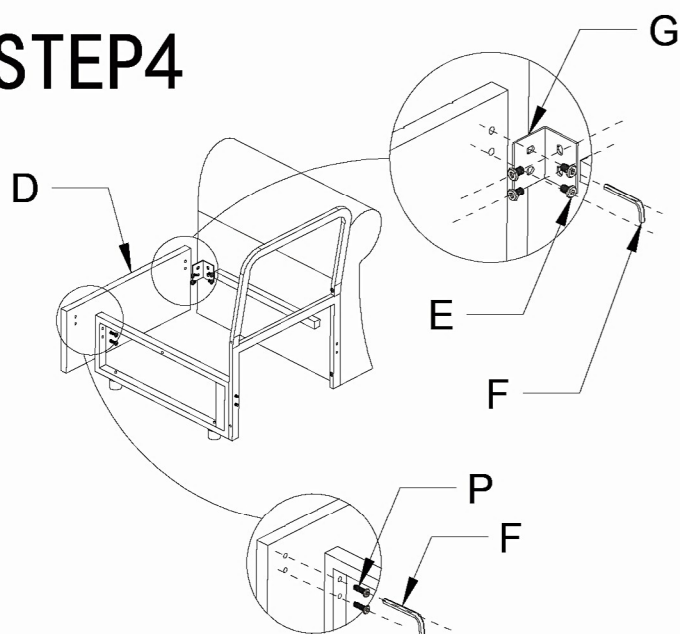


STEP5

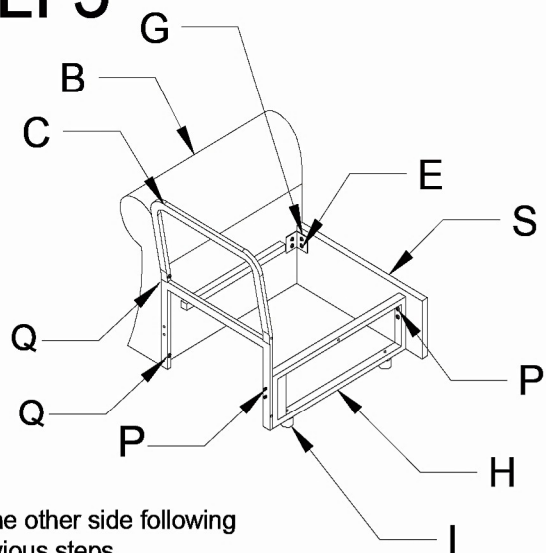


Install the other side following the previous steps


STEP6

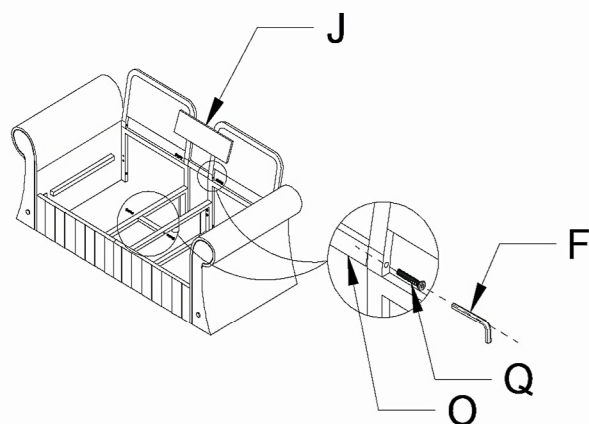

STEP7

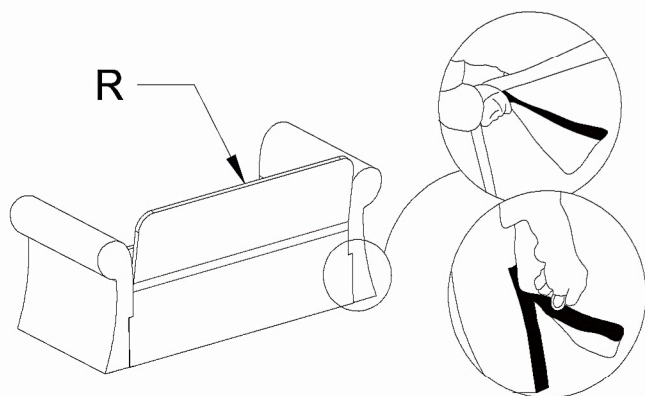

STEP8

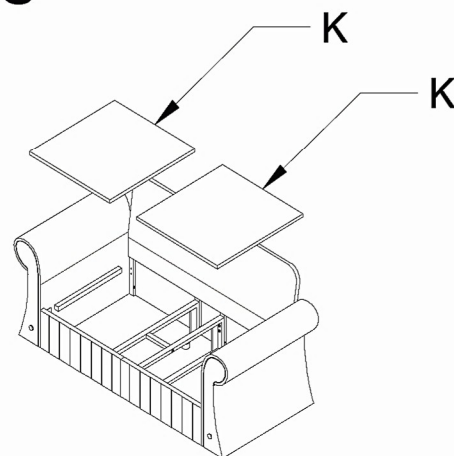


STEP9

Compression use of Seat cushion


- 1 Compression state carefully cut off the tape
- 2 Let it stand for 5 min to recover the decompression stake

How to tidy sofa seat cushions?

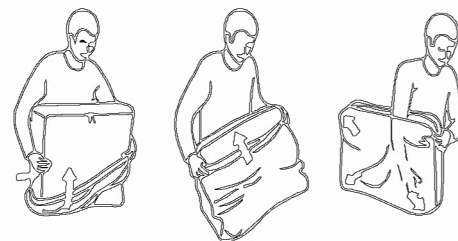


- 3 Put the seat cushion cover
- 4 The T side first into the sleeve
The side indicated by the arrow matches the surface of the seat cushion cover.
- 5 Seat cushion Complete installation

STEP10

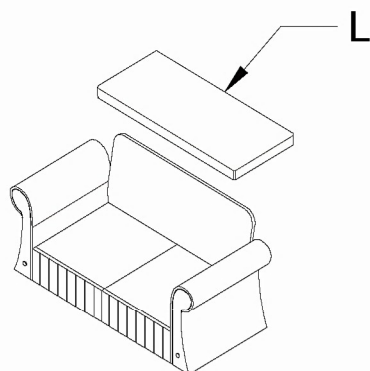

STEP11

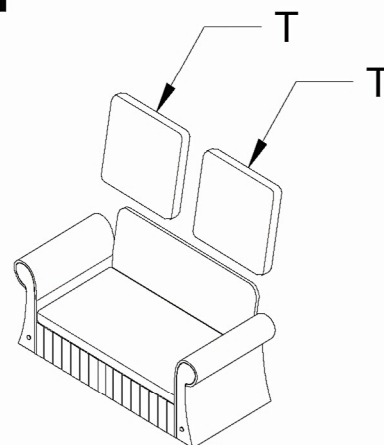

STEP12

